Common Mode Choke

EPA3482S



- Ideal for LAN Applications
- For use with 10Base-T, Token Ring and 100 MBPS
- High Frequency Choke for EMI Reduction

Electrical Parameters @ 25° C

OCL (μH Min.)	**Turns Ratio** (± 1%)	**DCR** (Ω Max.)	**Hipot** (Vrms)
@ 100 KHz, 100m Vrms			for 1 minute
40	1:1	0.6	500

Schematic

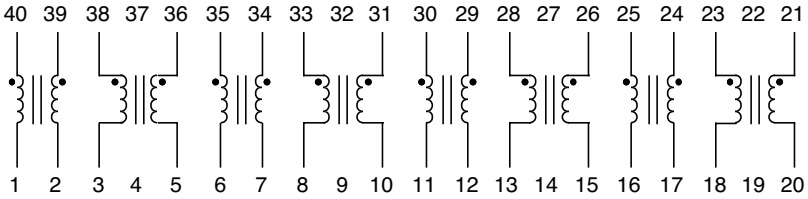

Package

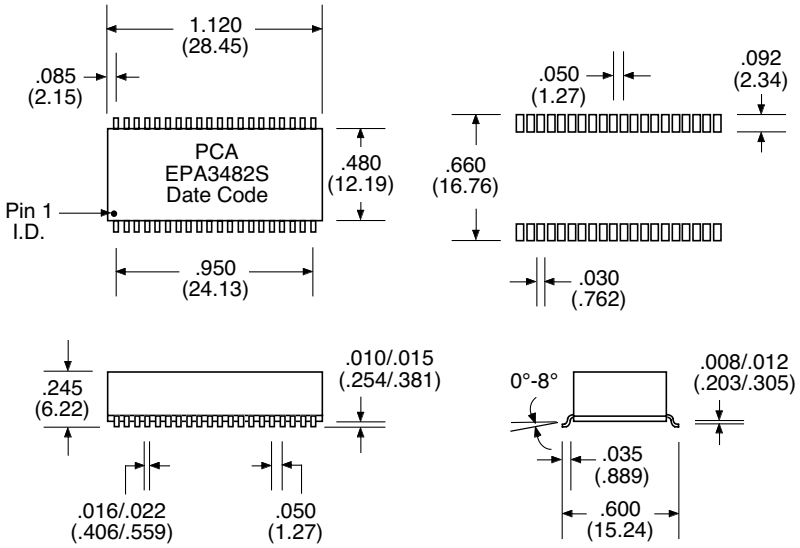

Impedance Vs. Frequency

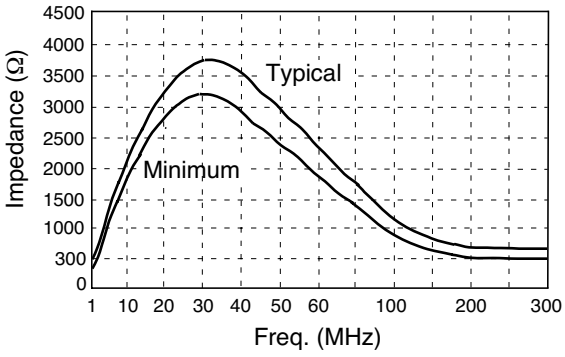

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 /.25

PCA ELECTRONICS, INC.
16799 SCHOENBORN ST.
NORTH HILLS, CA 91343

Product performance is limited to specified parameters. Data is subject to change without prior notice.

CSA3482 Rev. 1 3/3/03

TEL: (818) 892-0761
FAX: (818) 894-5791
http://www.pca.com