



## SmartReader Plus Display Module

### Real-time LCD display for SmartReader Plus Data Loggers

The SmartReader Plus Display Module was designed to provide real-time readings for all ACR SmartReader Plus Data Loggers. It eliminates the need to attach a logger to a computer in order to view data in real-time. The display module is powered by AC power or by battery which allows for portability and versatility.

#### FEATURES

- Portable, battery powered and easy to use
- View real-time channel data\*
- Compatible with all SmartReader Plus data loggers
- Useful for verification and spot checking purposes
- Optional power supply for continuous visual display


\*When using built-in equations (Real-time readings are not available when using custom equations)

#### GENERAL SPECIFICATIONS

Size:	26.6mm x 126.9mm x 76.2mm (1.05" x 5" x 3")
Weight:	185 g (6.5 oz)
Display Window Size:	15.0mm x 62.0mm (0.56" x 2.5")
Display Type:	Liquid Crystal Display (LCD)
Font Size:	20 point
Batteries:	2 AA batteries (included)
Operating Limits:	0°C to 50°C (32°F to 122°F) and 0 to 95% RH (non-condensing)

### EXAMPLE OF USE WITH A SMARTREADER PLUS 2 TEMPERATURE AND RELATIVE HUMIDITY DATA LOGGER

SmartReader Plus  
Display Module

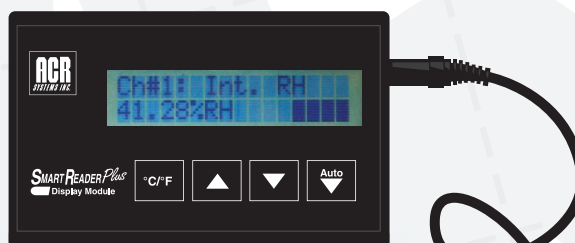

SmartReader Plus 2  
Temperature and Relative  
Humidity Data Logger  
*Sold Separately*



#### ORDERING INFORMATION

<b>Item:</b>	<b>Cat#:</b>
SRP Display Module *	01-0171

\*Includes:  
2 AA batteries, 1' stereo cable  
and user documentation

#### Accessories (Sold Separately)

<b>Power Supply:</b>	<b>Cat#:</b>
North America	33-0015
United Kingdom	33-0017
Europe	33-0016
Australia	33-0014