

## SMS-25V


The Soft dB's SMS-25V is a 25-volt system loudspeaker designed to generate the optimum masking sound for a variety of ceiling conditions. It is equipped with a 13 cm (5 in.) driver installed in a sealed enclosure.

It is typically installed in the plenum space, suspended between the acoustic tiles and the deck. In the case of an open ceiling, it can be attached to the structure. The SMS-25V loudspeaker can be oriented in any direction. Four different power taps (½, 1, 2 and 4 W) controlled with a rotary switch allows quick adjustments of the output level. A RoHS compliant version is also available.


### Specifications

Power:	10 watts
Line Voltage:	25 V
Sensitivity:	91 dB
Material:	ABS fire proof
Frequency Response:	100-8000 Hz
Connectors:	4mm (5/32") Screw terminals
Driver:	13cm (5 in.) fullrange
Color:	Black or White
Weight:	1.6 kg (3.5 lbs)
Shipping Weight:	1.8 kg (4 lbs)

### Dimensions

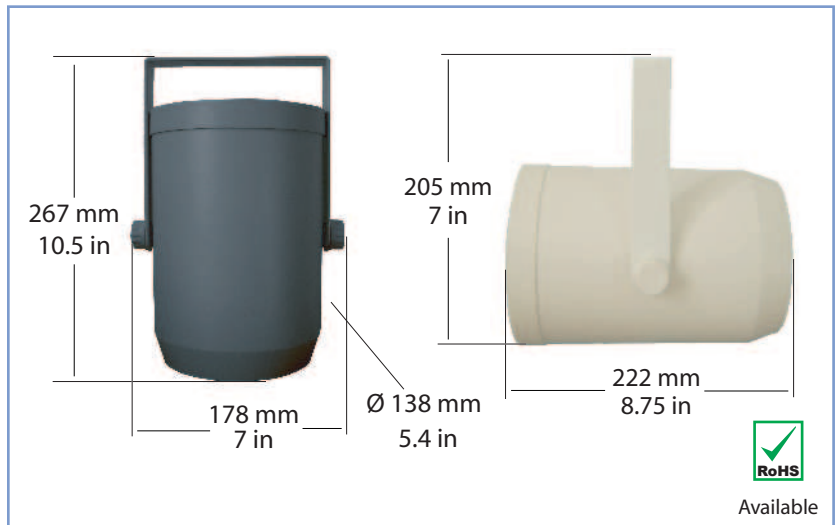

### Frequency Response

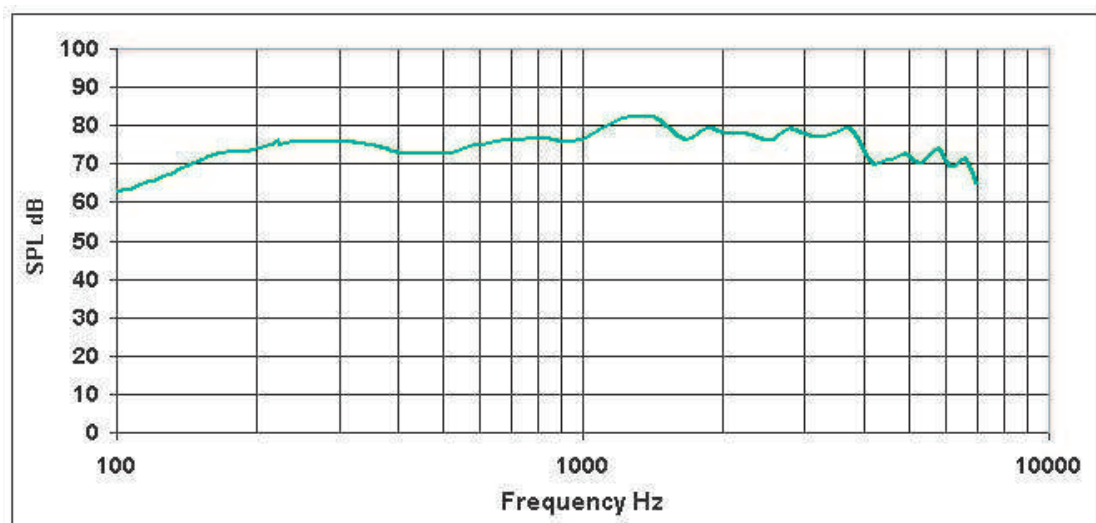

Specifications are subject to change without notice