

SMS-25V-SURF

The Soft dB's SMS-25V-SURF is a 25-volt system loudspeaker designed to generate the optimum masking sound for surface-mounted applications. It is equipped with a 16.5 cm (6.5 in.) driver installed in a sealed enclosure.


The SMS-25V-SURF must be installed on the surface of drywall ceiling or on ceiling tiles through a 19.3 cm (8.6 in.) diameter hole. Four different power taps ($\frac{1}{2}$, 1, 2 and 4 W) controlled with a rotary switch allows quick adjustments of the output level.




Specifications

Power:	10 watts
Line Voltage:	25 V
Sensitivity:	88 dB
Material:	ABS fire proof
Frequency Response:	100-8000 Hz
Connectors:	Spring Loaded Terminals
Driver:	16.5 cm (6.5 in.) fullrange
Color:	White
Weight:	1.8 kg (4 lbs)
Shipping Weight:	2 kg (4.4 lbs)

Dimensions

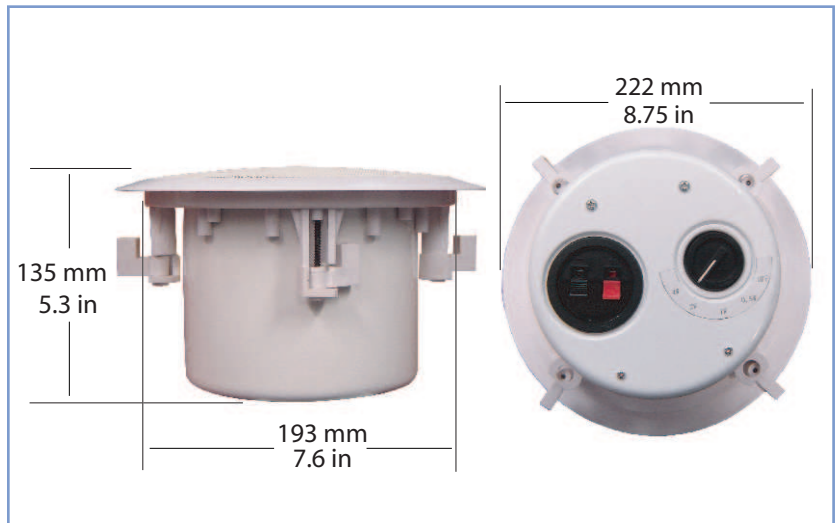

Frequency Response

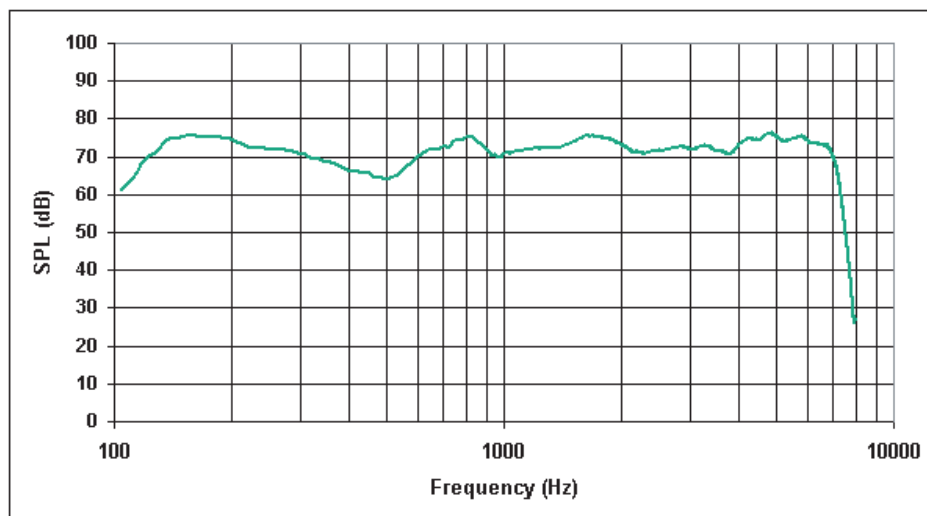

Specifications are subject to change without notice