

The Soft dB's SMS-FLAT is a 25-volt system loudspeaker designed to generate the optimum sound masking spectrum in a very compact configuration. It is equipped with a dual transducer in bipole configuration.


It is used in very tight plenum space or in open ceiling. It is typically mounted directly on the deck. A rotary switch allows quick adjustment of the output level with 4W, 2W, 1W, 1/2W power available with a 25-Volt supply. The loudspeaker is also compatible with 70-Volt systems with 8W and 4W, adjustment available.

## Specifications

Power:	10 watts
Line Voltage:	25 V and 70 V
Sensitivity:	85 dB
Material:	Metal
Frequency Response:	100-8000 Hz
Connectors:	Push Terminal + Lock Screw
Driver:	Dual 2.5 x 10 cm (1 x 4 in.)
Color:	Black or White
Weight:	1.13 kg ( 2.5 lbs)
Shipping Weight:	1.21 kg (2.7 lbs)
Size (metric):	188 x 134 x 50 mm
Size (imperial):	7-7/16 x 5-5/16 x 2 in.



## Frequency Response

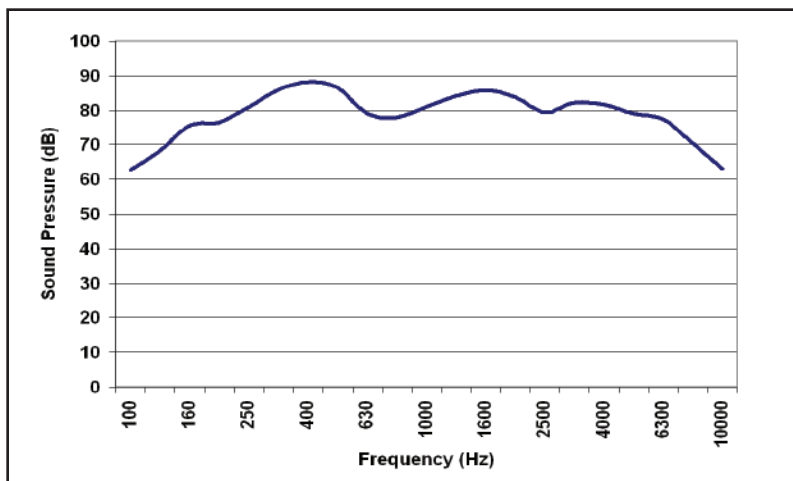

Specifications are subject to change without notice