


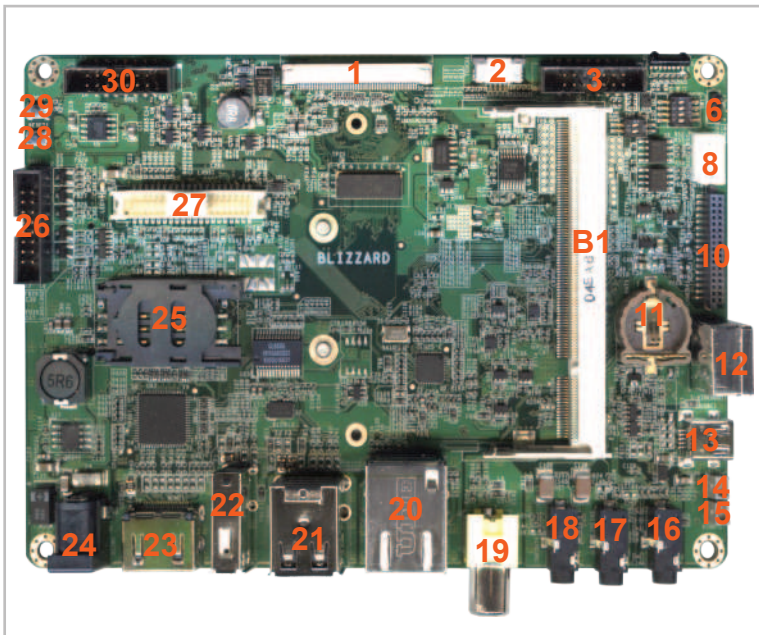

Complete TDM-3730 multimedia development board compatible with any display through LVDS, TTL, HDMI, VGA, S-Video interfaces.

Expand storage options with USB, SATA and micro-SD card slot.

Record and play back audio and video easily over the Composite, S-video interfaces, audio jacks and speakers and Camera expansion interface.

Communicate over LAN, RS-232, RS-422/485, SPI, I²C to control remote or external devices or connect over a 3G data module to the outside world.

System

System on module

Compatible with TDM-3730 by a 200 pin SO-DIMM connector (**B1**) with backup battery (**11**)

RTC

Interfaces

Connectors

3 standard-USB hosts (**21, 22**)
1 mini-USB device/ OTG (**13**)
RJ-45 LAN connector (**20**)
micro-SD card slot (**bottom**)
Stereo audio in/out 3.5 mm (**17,18**)
Microphone 3.5 mm (**16**)
2W amplified speaker (**14, 15**)
18 bit LVDS and touchpanel (**27**)
TTL & touchpanel for 4.3" LCD
TTL & touchpanel for 7" LCD (**1**)
RCA composite in (**19**)
S-video out (**12**)
HDMI connector (**23**)
MiniPCle slot (**bottom**) +
SIM card (**25**) for 3G module slot (**bottom**)
VGA by pinheader (**26**), Camera expansion (**10**), keypad (**30**), SPI (**3**), RS-232 (**6**), UART, RS-422/485 (**8**), I²C, GPIO

Expansion header

Power

Input power

12 VDC

Environmental and Mechanical

Temperature

Commercial: 0° to 50° C

Humidity

10-90%

Dimensions

147 x 102 mm (5¾ x 4 inch)

Weight

92 grams

Shock


50G / 25ms

Vibration

20G / 0-600 Hz

Dimensions

units in mm

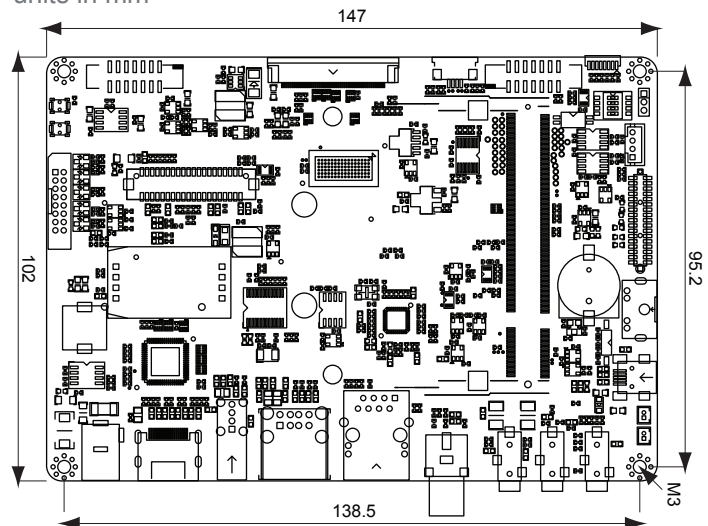

Order Information

Blizzard

Base board for TDM-3730 series

ARM Expansion Modules

TCM-500A

5 MP camera module

Development kits available

TechNexion

Phone: +886-2-8227-3585

E-mail: sales@technexion.com

Web: <http://www.technexion.com>

