



Turn TAO-3530 into a media center with audio in/out, HDMI/DVI and S-VIDEO multimedia interfaces.

Flexible expansion storage with easy to use SD cardslot.

System

System on module

Compatible with TAO-3530 by two 100 pin NAIS connectors (**B1, B2**)

Interfaces

Connectors

1 mini-USB host (**8**)
1 mini-USB device/ OTG (**5**)
SD card slot (**bottom**)
stereo audio in/out, 3.5 mm (**2, 3**)
S-Video out connector (**7**)
DVI-D signal by HDMI connector(**4**)
SPI, RS-232, UART, I²C, GPIO (**1**)

40 pin thruhole

Power

Input power

5VDC

Environmental and Mechanical

Temperature

Commercial: 0° to 50° C

Humidity

10-90%

Dimensions

52 x 74 mm

2 x 2 7/8 inch

Weight

25 grams

Shock


50G / 25ms

Vibration

20G / 0-600 Hz

Dimensions

units in mm

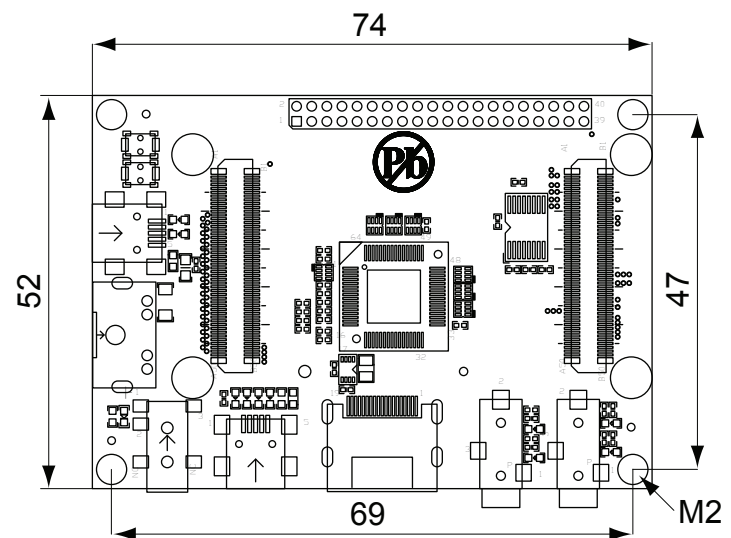

Order Information

Inferno

Base board for TAO series

Development kits available

TechNexion

Phone: +886-2-8227-3585

E-mail: sales@technexion.com

Web: <http://www.technexion.com>

