



## SPECIFICATIONS

**Fin Diameter 1.750"**

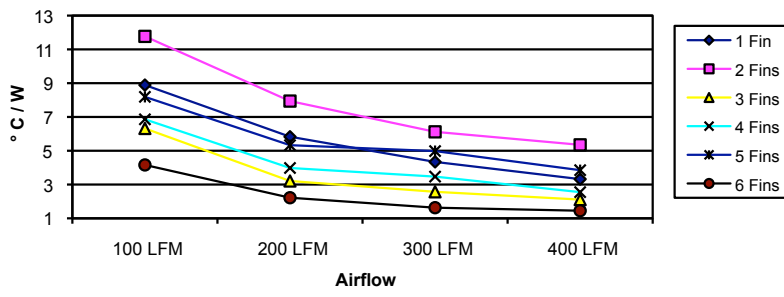

| Airflow (LFM) | 1 Fin | 2 Fins | 3 Fins | 4 Fins | 5 Fins | 6 Fins |
|---------------|-------|--------|--------|--------|--------|--------|
| 100           | 8.46  | 11.5   | 6.52   | 6.52   | 5.56   | 4.38   |
| 200           | 5.85  | 8.0    | 3.78   | 3.78   | 3.37   | 2.13   |
| 300           | 4.66  | 6.5    | 3.30   | 3.30   | 2.61   | 1.60   |
| 400           | 3.97  | 5.5    | 2.42   | 2.42   | 2.33   | 1.47   |

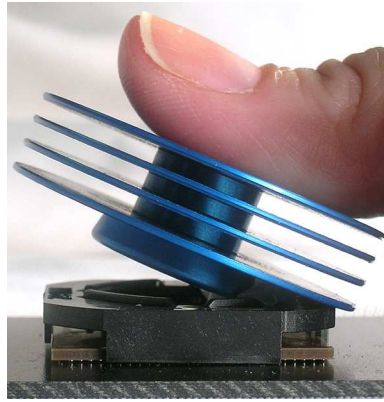

| Part Number | # fins | Heatsink Height | Dia Fins (in) | °C/W @100 LFM | °C/W @200 LFM | °C/W @300 LFM | °C/W @400 LFM |
|-------------|--------|-----------------|---------------|---------------|---------------|---------------|---------------|
| CGTT3313    | 1      | 0.250           | 1.750         | 8.46          | 5.85          | 4.66          | 3.97          |
| CGTT3323    | 2      | 0.357           | 1.750         | 7.17          | 4.22          | 3.57          | 2.83          |
| CGTT3333    | 3      | 0.464           | 1.750         | 6.52          | 3.78          | 3.30          | 2.42          |
| CGTT3343    | 4      | 0.571           | 1.750         | 5.56          | 3.37          | 2.61          | 2.33          |
| CGTT3353    | 5      | 0.678           | 1.750         | 5.04          | 2.55          | 1.88          | 1.76          |
| CGTT3363    | 6      | 0.785           | 1.750         | 4.38          | 2.13          | 1.60          | 1.47          |

Heat Sink Material: Aluminum  
 Finish: Blue Anodized  
 Clip: UL90 V0 rated, Plastic  
 Thermal Pad: Provided

\*The thermal data presented is for reference only. The performance can be modified for your specific application.

