



SPECIFICATIONS

Fin Diameter 2.00"

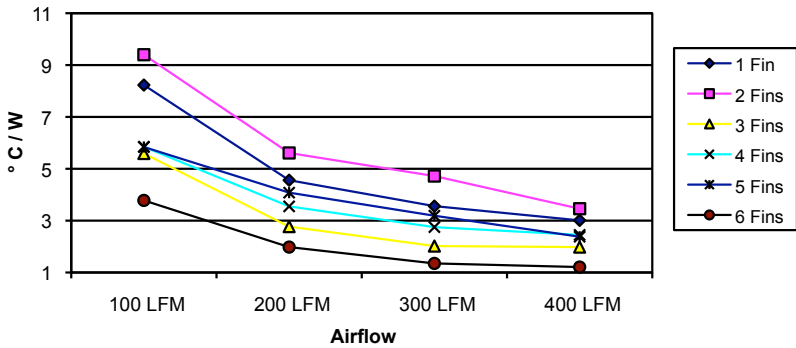

Part Number	# fins	Heatsink Height	Dia Fins (in)	°C/W @100 LFM	°C/W @200 LFM	°C/W @300 LFM	°C/W @400 LFM
CGTT37514	1	0.250	2.000	7.22	4.95	4.01	3.66
CGTT37524	2	0.357	2.000	5.55	3.88	3.03	2.26
CGTT37534	3	0.464	2.000	5.23	3.38	2.87	2.04
CGTT37544	4	0.571	2.000	4.50	2.55	2.04	1.90
CGTT37554	5	0.678	2.000	3.95	2.11	1.55	1.38
CGTT37564	6	0.785	2.000	3.59	1.88	1.28	1.15

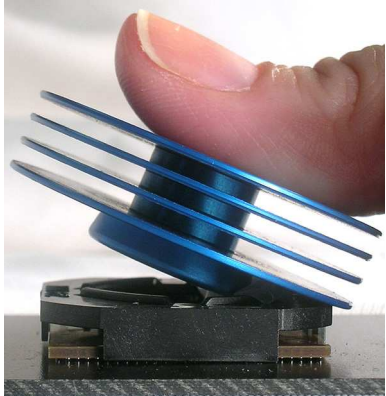

Part Number	# fins	Heatsink Height	Dia Fins (in)	°C/W @100 LFM	°C/W @200 LFM	°C/W @300 LFM	°C/W @400 LFM
CGTT37514	1	0.250	2.000	7.22	4.95	4.01	3.66
CGTT37524	2	0.357	2.000	5.55	3.88	3.03	2.26
CGTT37534	3	0.464	2.000	5.23	3.38	2.87	2.04
CGTT37544	4	0.571	2.000	4.50	2.55	2.04	1.90
CGTT37554	5	0.678	2.000	3.95	2.11	1.55	1.38
CGTT37564	6	0.785	2.000	3.59	1.88	1.28	1.15

Heat Sink Material: Aluminum
 Finish: Blue Anodized
 Clip: UL90 V0 rated, Plastic
 Thermal Pad: Provided

*The thermal data presented is for reference only. The performance can be modified for your specific application.

