



## SPECIFICATIONS

**Fin Diameter 1.375"**

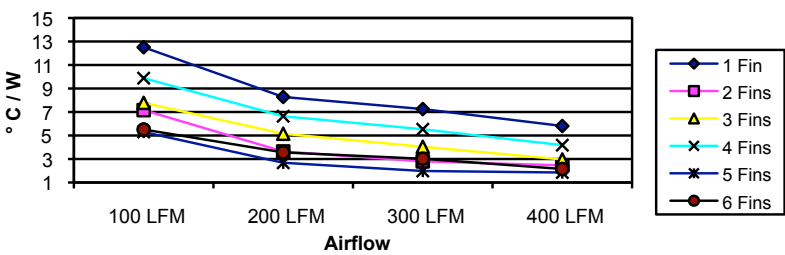

Fin Count	100 LFM	200 LFM	300 LFM	400 LFM
1 Fin	11.19	7.40	5.92	4.70
2 Fins	9.76	5.72	4.62	3.57
3 Fins	8.36	5.48	4.08	3.12
4 Fins	7.74	4.29	3.35	2.83
5 Fins	6.73	3.42	2.63	2.31
6 Fins	5.76	3.00	2.29	2.06

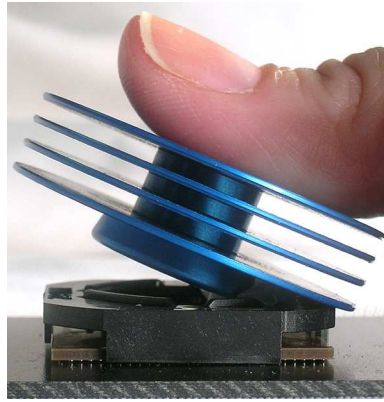



  

Part Number	# fins	Heatsink Height	Dia Fins (in)	°C/W @100 LFM	°C/W @200 LFM	°C/W @300 LFM	°C/W @400 LFM
CGTT42511	1	0.250	1.375	11.19	7.40	5.92	4.70
CGTT42521	2	0.357	1.375	9.76	5.72	4.62	3.57
CGTT42531	3	0.464	1.375	8.36	5.48	4.08	3.12
CGTT42541	4	0.571	1.375	7.74	4.29	3.35	2.83
CGTT42551	5	0.678	1.375	6.73	3.42	2.63	2.31
CGTT42561	6	0.785	1.375	5.76	3.00	2.29	2.06

Heat Sink Material: Aluminum  
 Finish: Blue Anodized  
 Clip: UL90 V0 rated, Plastic  
 Thermal Pad: Provided





\*The thermal data presented is for reference only. The performance can be modified for your specific application.