



Date: 07/28/2010

HIGH ENERGY SERIES

MAIDA STYLE NUMBER S75C6ZOV151RA360

MAIDA ITEM NUMBER 01-1715

VARISTOR SPEC SHEET

Electrical Specifications

| | | |
|------------------------------------|-------|------|
| Continuous AC Voltage | 150 | VAC |
| Continuous DC Voltage | 200 | VDC |
| Maximum DC Leakage @ 200 VDC | 200 | uA |
| Low Varistor Voltage Limit | 212 | VDC |
| High Varistor Voltage Limit | 259 | VDC |
| Nominal Varistor Voltage | 236 | VDC |
| Current for Varistor Voltage | 1 | mA |
| Maximum Clamp Voltage | 395 | V |
| Maximum Clamp Voltage Test Current | 300 | A |
| Peak Current Rating (1 Pulse) | 40000 | A |
| Peak Current Rating (2 Pulse) | 32000 | A |
| Energy Rating (8X20us) | 360 | J |
| Energy Rating (10X1000us) | 360 | J |
| Typical Capacitance | 6900 | pF |
| Impulse Response Time | < 50 | ns |
| Minimum Hipot of Coating | 2500 | VDC |
| Minimum I.R. of Coating | 1000 | MΩ |
| Current/Energy Derating Above 85°C | -2.5 | %/°C |


Physical Specifications

| | |
|-----------------------|-------------|
| Lead Style | |
| X Nominal | 1 in. |
| X Tolerance | 0.02 in. |
| Y Nominal | 0.214 in. |
| Y Tolerance | 0.04 in. |
| Z Nominal | in. |
| Z Tolerance | in. |
| Lead Length Nominal | in. |
| Lead Length Tolerance | in. |
| d Nominal | 0.02 in. |
| Wire Gauge | 24 AWG |
| Minimum Marking | 2xD4S-151UL |
| Nominal Disk Size | 34 mm |
| D Maximum | 1.476 in. |
| T Maximum | 0.321 in. |
| H Maximum | 2.225 in. |
| Coating Type | EPOXY |

NOTE: Electrical Specifications are for each disc in package.

Thermal Specifications

| | | |
|------------------------------------|-------|------|
| Minimum Operating Temperature | -40 | °C |
| Maximum Operating Temperature | 85 | °C |
| Varistor Voltage Temperature Coeff | -0.05 | %/°C |
| Minimum Storage Temperature | -50 | °C |
| Maximum Storage Temperature | 125 | °C |
| Recommended Solder Temperature | 260 | °C |
| Recommended Reflow Temperature | 260 | °C |

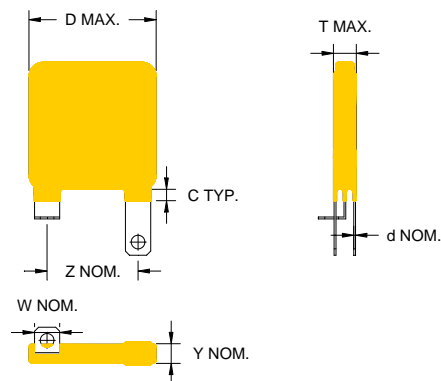

* Contact Maida for a more detailed configuration drawing.

Notes

Safety Agency Recognitions

| | |
|---------------------|---------|
| UL 1449 File Number | E321173 |
| - Tested to Type: | 2 |
| CSA File Number | LR33468 |
| VDE File Number | |
| SEV File Number | |



MAIDA DEVELOPMENT COMPANY

P.O. Box 3529

Hampton, Virginia 23663

www.maida.com

Ph: (757) 723-0785 Fax (757) 722-1194