

VARISTOR SPECIFICATION SHEET

Date: 01/20/2009

MAIDA STYLE NUMBER 25FN781K

MAIDA ITEM NUMBER 01-2482

CUSTOMER WEB

CUSTOMER P/N N/A

CONTACT N/A

Electrical Specifications


Continuous AC Voltage	485 VAC
Continuous DC Voltage	640 VDC
Maximum DC Leakage @ 640 VDC	200 uA
Low Varistor Voltage Limit	702 VDC
High Varistor Voltage Limit	858 VDC
Nominal Varistor Voltage	780 VDC
Current for Varistor Voltage	1 mA
Maximum Clamp Voltage	1290 V
Maximum Clamp Voltage Test Current	150 A
Peak Current Rating (1 Pulse)	18000 A
Peak Current Rating (2 Pulse)	12000 A
Energy Rating (8X20us)	675 J
Energy Rating (10X1000us)	675 J
Typical Capacitance	800 pF
Impulse Response Time	< 50 ns
Minimum Hipot of Coating	2500 VDC
Minimum I.R. of Coating	1000 MΩ

Thermal Specifications

Minimum Operating Temperature	-55 °C
Maximum Operating Temperature	85 °C
Varistor Voltage Temperature Coeff	-0.05 %/°C
Minimum Storage Temperature	-55 °C
Maximum Storage Temperature	125 °C
Current/Energy Derating Above 85°C	-2.5 %/°C

Notes**Physical Specifications**

Lead Style	
X Nominal	0.492 in.
X Tolerance	0.039 in.
Lead Length Nominal	1.00 in.
Lead Length Tolerance	min. in.
Y Nominal	0.307 in.
Y Tolerance	0.03 in.
d Nominal	0.04 in.
Wire Gauge	18 AWG
Minimum Marking	MDC-FV-25N781K
Nominal Disk Size	25 mm
D Maximum	1.142 in.
T Maximum	0.622 in.
H Maximum	1.26 in.

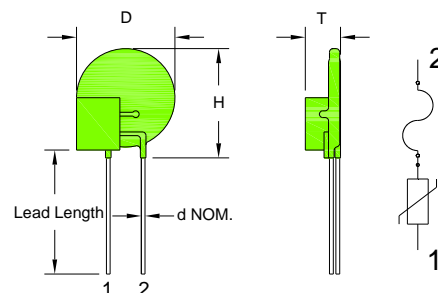

* Contact Maida for a more detailed configuration drawing.

Safety Agency Recognitions

UL 1449 File Number
 UL 1414 File Number
 CSA File Number
 VDE File Number
 SEV File Number

VARISTOR SPEC SHEET



DEVELOPMENT COMPANY

P.O. Box 3529

Hampton, Virginia 23663

(757) 723-0785 Fax (757) 722-1194