

VARISTOR SPECIFICATION SHEET

Date: 01/20/2009

MAIDA STYLE NUMBER 20FN911K

MAIDA ITEM NUMBER 01-2416

CUSTOMER WEB

CUSTOMER P/N N/A

CONTACT N/A

Electrical Specifications


Continuous AC Voltage	550 VAC
Continuous DC Voltage	745 VDC
Maximum DC Leakage @ 745 VDC	200 uA
Low Varistor Voltage Limit	819 VDC
High Varistor Voltage Limit	1001 VDC
Nominal Varistor Voltage	910 VDC
Current for Varistor Voltage	1 mA
Maximum Clamp Voltage	1500 V
Maximum Clamp Voltage Test Current	100 A
Peak Current Rating (1 Pulse)	10000 A
Peak Current Rating (2 Pulse)	6000 A
Energy Rating (8X20us)	500 J
Energy Rating (10X1000us)	500 J
Typical Capacitance	440 pF
Impulse Response Time	< 50 ns
Minimum Hipot of Coating	2500 VDC
Minimum I.R. of Coating	1000 MΩ

Thermal Specifications

Minimum Operating Temperature	-55 °C
Maximum Operating Temperature	85 °C
Varistor Voltage Temperature Coeff	-0.05 %/°C
Minimum Storage Temperature	-55 °C
Maximum Storage Temperature	125 °C
Current/Energy Derating Above 85°C	-2.5 %/°C

Notes**Physical Specifications**

Lead Style	
X Nominal	0.492 in.
X Tolerance	0.039 in.
Lead Length Nominal	1.00 in.
Lead Length Tolerance	min. in.
Y Nominal	0.307 in.
Y Tolerance	0.03 in.
d Nominal	0.04 in.
Wire Gauge	18 AWG
Minimum Marking	MDC-FV-20N911K
Nominal Disk Size	20 mm
D Maximum	0.945 in.
T Maximum	0.543 in.
H Maximum	1.024 in.

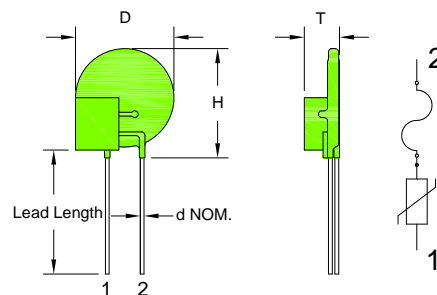

* Contact Maida for a more detailed configuration drawing.

Safety Agency Recognitions

UL 1449 File Number
 UL 1414 File Number
 CSA File Number
 VDE File Number
 SEV File Number

VARISTOR SPEC SHEET



DEVELOPMENT COMPANY

P.O. Box 3529

Hampton, Virginia 23663

(757) 723-0785 Fax (757) 722-1194