



2.0mm Pin Header Height 4.3mm Straight (Right Angle) Type

MATERIAL







Insulator : High Temperature Polyester
Contact Pin : Brass

SPECIFICATION



Current Rate : 2 AMP
Insulation Resistance : 1000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Operation Temperature : -40°C to + 105°C



Detail Dimensions

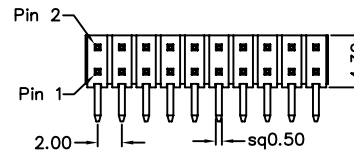

Recommended P.C.B Layout



Order Information

22 x - x 2 - xx G B xx
1 2 3 4 5

Standard Parts	DIM A	DIM B
22A-x2-xxGB05	4.00	2.80
22B-x2-xxGB05	4.00	2.80

- 1. A: Straight Type
- B: Right Angle Type
- 2. 7: Green Product
- 9: Green Product High Temp
- 3. No. of contacts per row
- 4. G: Gold Flash
- S: Selective Gold Plating

- T: Tin plated
- 5. Pinrex internal code

If you need other dimensions, please fill out DIM A/B and contact our sales representatives.

DIM A	DIM B

Number Of Contacts

Unit: mm

Poles	DIM E	Poles	DIM E	Poles	DIM E	Poles	DIM E	Poles	DIM E	Poles	DIM E	Poles	DIM E	Poles	DIM E
		8	14.00	15	28.00	22	42.00	29	56.00	36	70.00				
		9	16.00	16	30.00	23	44.00	30	58.00	37	72.00				
3	4.00	10	18.00	17	32.00	24	46.00	31	60.00	38	74.00				
4	6.00	11	20.00	18	34.00	25	48.00	32	62.00	39	76.00				
5	8.00	12	22.00	19	36.00	26	50.00	33	64.00	40	78.00				
6	10.00	13	24.00	20	38.00	27	52.00	34	66.00						
7	12.00	14	26.00	21	40.00	28	54.00	35	68.00						