



2.54mm Pin Header U Jumper Type

MATERIAL


Insulator : High Temperature Polyester
Contact Pin : Brass

SPECIFICATION


Current Rate : 3 AMP
Insulation Resistance : 1000MΩMin. at DC 600V
Contact Resistance : 20mΩMax. at DC 100mA
Operation Temperature : -40°C to + 105°C



Detail Dimensions

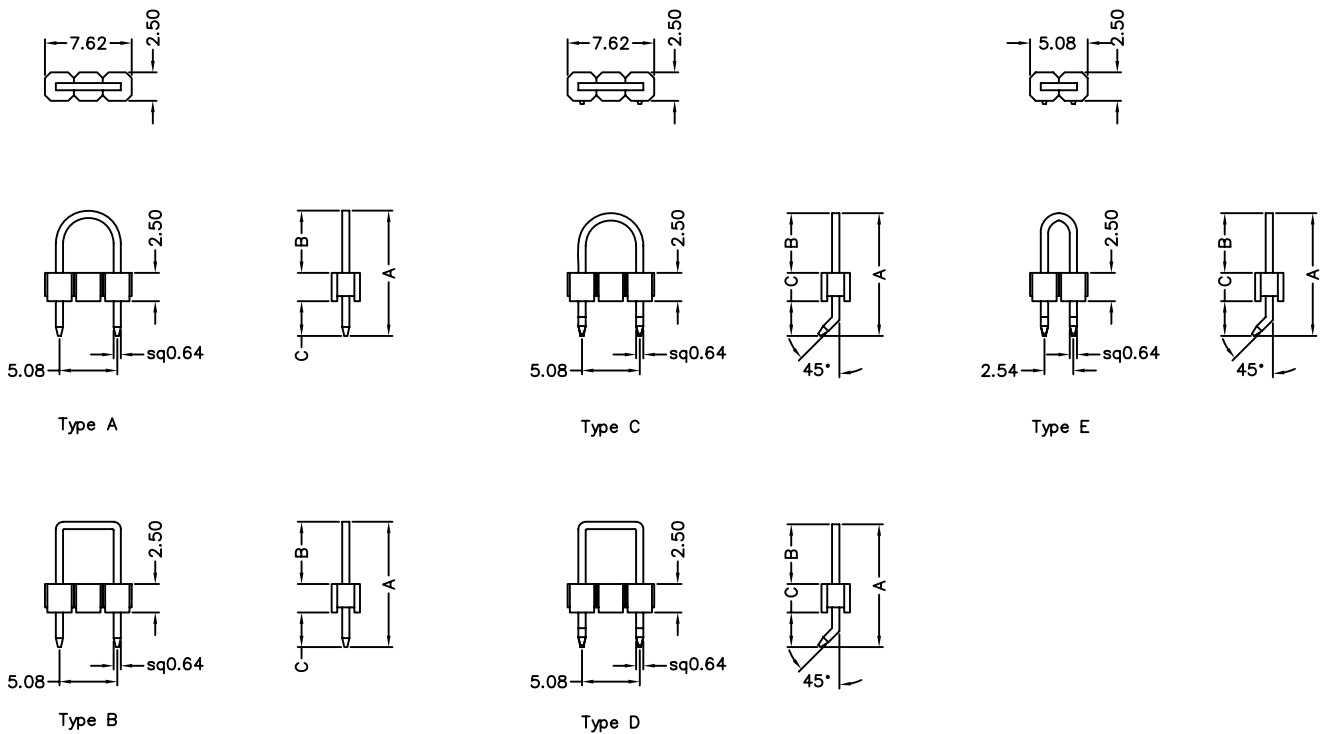


Recommended P.C.B Layout



Order Information

21U - x 1 - 03 G B xx
1 2 3

- 7: Green Product
9: Green Product High Temp
- G: Gold Flash
S: Selective Gold Plating
T: Tin Plating
- Pinrex internal code



Standard Parts	DIM A	DIM B	DIM C	
21U-x1-03xB01	11.02	5.47	3.05	Type A
21U-x1-03xB30	11.02	5.47	3.05	Type B
21U-x1-03xB05	10.80	5.25	3.05	Type C
21U-x1-03xB31	11.02	5.47	3.05	Type D
21U-x1-02xB05	10.80	5.25	3.05	Type E

If you need other dimensions, please fill out DIM A/B/C and contact our sales representatives.

DIM A	DIM B	DIM C

Unit: mm