




2.0mm Female Header Side Entry Type H=5.0mm

MATERIAL


Insulator : High Temperature Polyester
Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Operation Temperature : -40°C to + 105°C

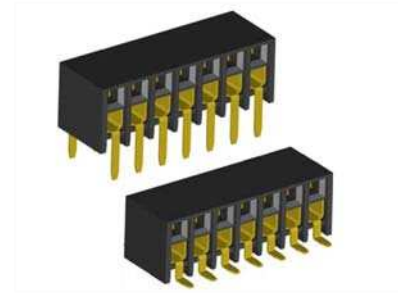

Detail Dimensions

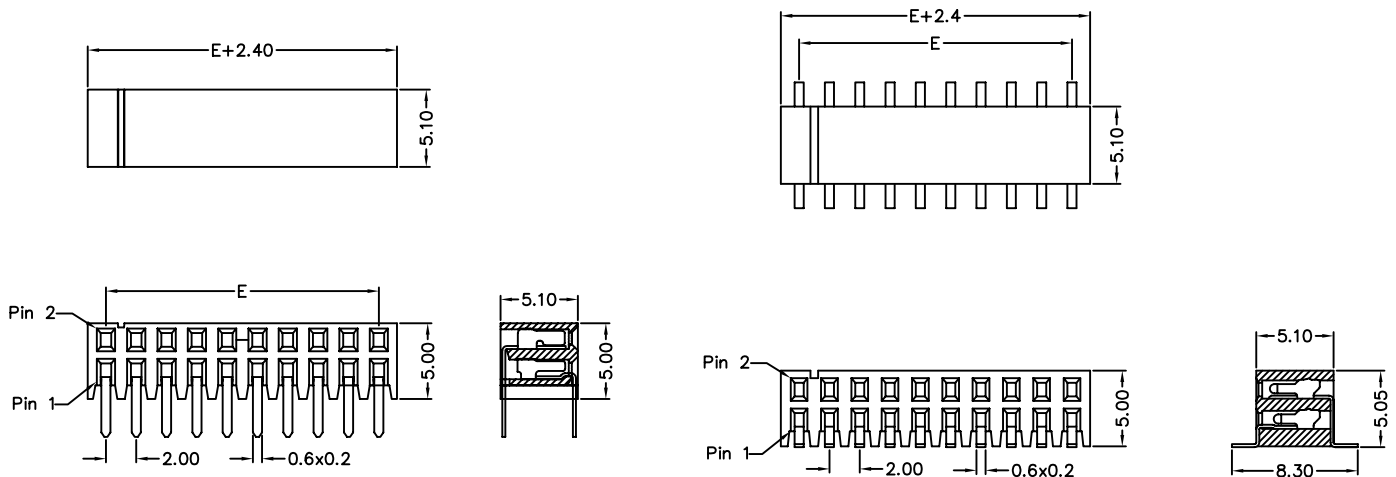

Recommended P.C.B Layout



Order Information

62x-x x - xx G B xx
1 2 3 4 5 6

- 1. A: SMT Type (3~25P)
B: DIP Type (3~24P)
- 2. 7: Green Product
9: Green Product High Temp
- 3. 1: Single row
2: Dual rows
- 4. No. of contacts per row
- 5. G: Gold Flash
S: Selective Gold Plating
T: Tin Plating
- 6. Pinrex internal code

Standard Parts
62A-92-xxGB00
62B-x2-xxGB05

Number Of Contacts

Unit: mm

Poles	DIM E	Poles	DIM E	Poles	DIM E	Poles	DIM E								
		8	14.00	15	28.00	22	42.00								
		9	16.00	16	30.00	23	44.00								
3	4.00	10	18.00	17	32.00	24	46.00								
4	6.00	11	20.00	18	34.00	25	48.00								
5	8.00	12	22.00	19	36.00										
6	10.00	13	24.00	20	38.00										
7	12.00	14	26.00	21	40.00										