




# 2.0mm Box Header Narrow Type with Stand-Off

## MATERIAL


Insulator : High Temperature Polyester  
Contact Pin : Brass

## SPECIFICATION


Current Rate : 1 AMP  
Insulation Resistance : 5000MΩMin. at DC 500V  
Contact Resistance : 20mΩMax. at DC 100mA  
Operation Temperature : -40°C to +105°C

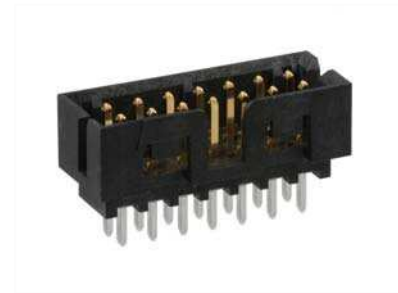

## Detail Dimensions

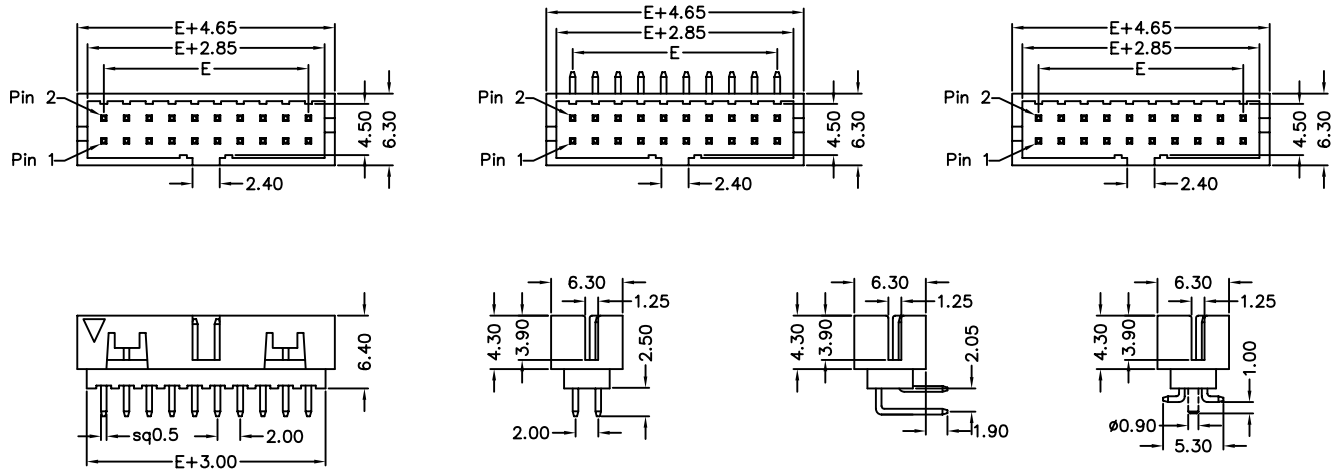

## Recommended P.C.B Layout

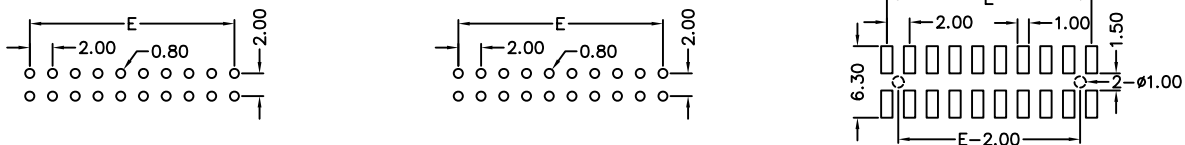

## Order Information

52x-x 0 - xx G B xx  
1 2 3 4 5

- 1. S: Straight Type  
T: Right Angle Type  
M: SMT Type
- 2. 7: Green Product  
9: Green Product High Temp
- 3. No. of contacts
- 4. G: Gold Flash  
T: Tin Plating

5. Pinrex internal code

Standard Parts
52S-x0-xxGB00
52T-x0-xxGB00
52M-x0-xxGB00

## Number Of Contacts

Unit: mm

Poles	DIM E	Poles	DIM E									NOTE
		24	22.00									Please be advised that not all positions are available because of small market demand. Any inquiries, please contact our sales rep.!
8	6.00	26	24.00									
10	8.00	40	38.00									
12	10.00	44	42.00									
14	12.00											
16	14.00											
20	18.00											