



# 0.8mm FPC Socket ZIF SMT R/A Type

## MATERIAL

Insulator : Polyester  
Contact Pin : Phosphor Bronze

## SPECIFICATION


Current Rate : 0.5 AMP  
Insulation Resistance : 50MΩMin.  
Contact Resistance : 20mΩMax.  
Operation Temperature : -40°C to +85°C




## Detail Dimensions

979-51- 5 xx 101

979-51- 5 xx 201

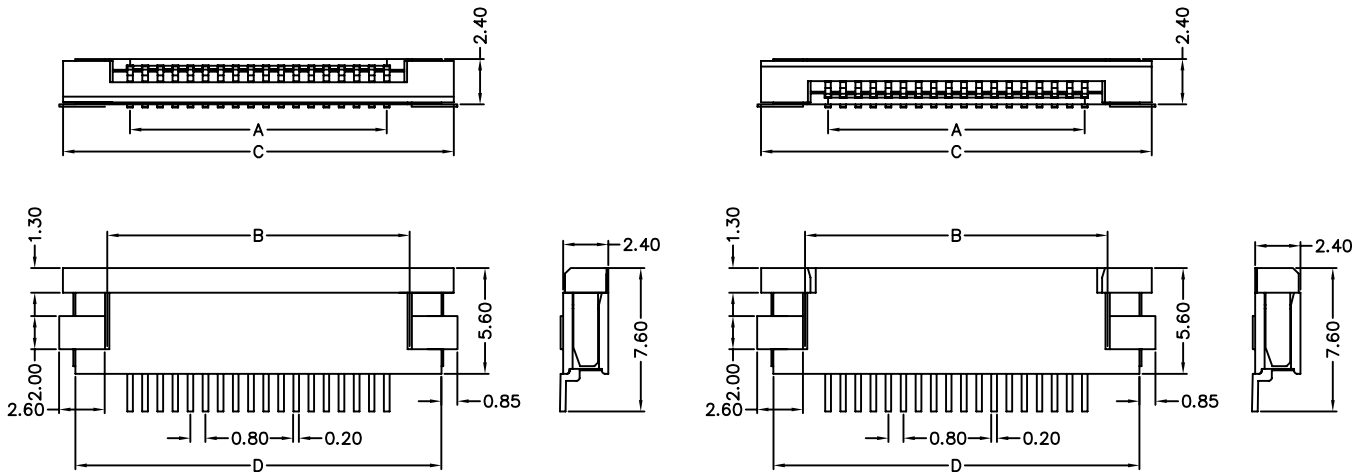


## Recommended P.C.B Layout

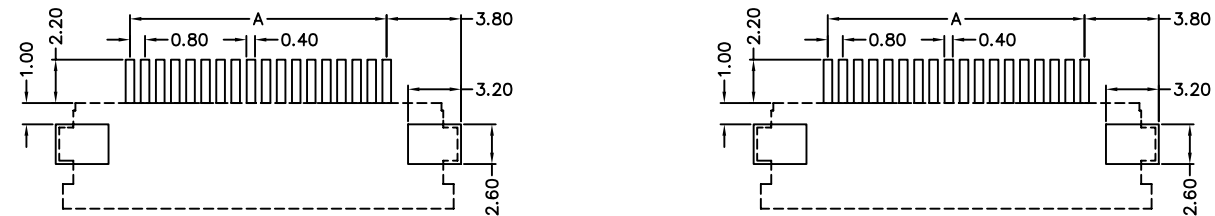

## Order Information

979-51- 5 xx x 01  
1 2

Standard Parts
979-51-5xx101
979-51-5xx201



FPC/FFC T=0.30±0.05

- No. of contacts (4~32)
- 1: Upper contact  
2: Bottom contact

## Number Of Contacts

Unit: mm

Poles	DIM A	DIM B	DIM C	DIM D	Poles	DIM A	DIM B	DIM C	DIM D	Poles	DIM A	DIM B	DIM C	DIM D
4	2.40	4.10	9.50	8.20	14	10.40	12.10	17.50	16.20	24	18.40	20.10	25.50	24.20
5	3.20	4.90	10.30	9.00	15	11.20	12.90	18.30	17.00	25	19.20	20.90	26.30	25.00
6	4.00	5.70	11.10	9.80	16	12.00	13.70	19.10	17.80	26	20.00	21.70	27.10	25.80
7	4.80	6.50	11.90	10.60	17	12.80	14.50	19.90	18.60	27	20.80	22.50	27.90	26.60
8	5.60	7.30	12.70	11.40	18	13.60	15.30	20.70	19.40	28	21.60	23.30	28.70	27.40
9	6.40	8.10	13.50	12.20	19	14.40	16.10	21.50	20.20	29	22.40	24.10	29.50	28.20
10	7.20	8.90	14.30	13.00	20	15.20	16.90	22.30	21.00	30	23.20	24.90	30.30	29.00
11	8.00	9.70	15.10	13.80	21	16.00	17.70	23.10	21.80	31	24.00	25.70	31.10	29.80
12	8.80	10.50	15.90	14.60	22	16.80	18.50	23.90	22.60	32	24.80	26.50	31.90	30.60
13	9.60	11.30	16.70	15.40	23	17.60	19.30	24.70	23.40					