



1.27x1.27mm IDC Connector (for 0.635mm Flat Cable)

MATERIAL


Insulator : Polyester
Contact Pin : Copper Alloy

SPECIFICATION

Current Rate : 0.5 AMP
Insulation Resistance : 1000MΩMin. at DC 500V
Contact Resistance : 10mΩMax. at DC 100mA
Operation Temperature : -40°C to +105°C



Detail Dimensions

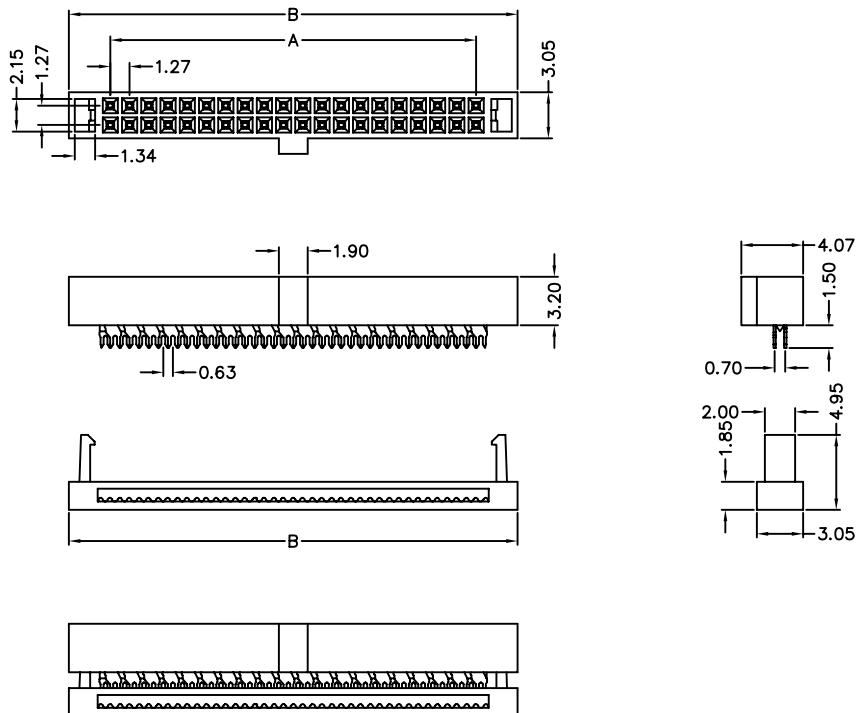

Order Information

977-31 - xx 3 2 x 4
1 2

Standard Parts	Type
977-31-xx3204	with Bump ; w/o SR

- No. of contacts
- 0: Selective Plating
- 2: Gold Flash

Number Of Contacts

Unit: mm

Poles	DIM A	DIM B	Poles	DIM A	DIM B	Poles	DIM A	DIM B						
6	2.54	8.00	30	17.78	23.24	80	49.53	54.99						
8	3.81	9.27	34	20.32	25.78									
10	5.08	10.54	40	24.13	29.59									
12	6.35	11.81	44	26.67	32.13									
16	8.89	14.35	50	30.48	35.94									
20	11.43	16.89	60	36.83	42.29									
26	15.24	20.70	68	41.91	47.37									