



Micro USB Connector B Solder Type

■ MATERIAL

Insulator : Polyester
 Contact Pin : Phosphor Bronze
 Shell : Stainless Steel / SPCC





■ SPECIFICATION

Current Rate : 1 AMP
 Insulation Resistance : 1000MΩMin. at DC 500V
 Contact Resistance : 30mΩMax.
 Operation Temperature : -55°C to +105°C




■ Detail Dimensions




BODY



Top Shell

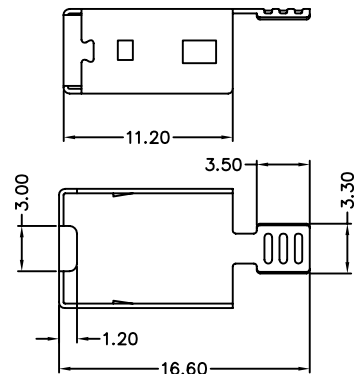

Down Shell

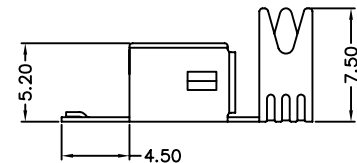

■ Order Information

984-75-7 05 0 1 4
 1 2 3

- 1. 5: Bulk package
- 2. No. of contacts
- 3. 1: with shells

Standard Parts
 984-75-705014

Unit: mm