



# Mini IEEE 1394 A R/A Type

## ■ MATERIAL

Insulator : Polyester  
Contact Pin : Copper Alloy  
Shell : Brass


## ■ SPECIFICATION

Current Rate : 1 AMP at 250V DC  
Insulation Resistance : 1000MΩMin. at DC 500V  
Contact Resistance : 30mΩMax. at DC 100mA




## ■ Detail Dimensions



984-51-604211

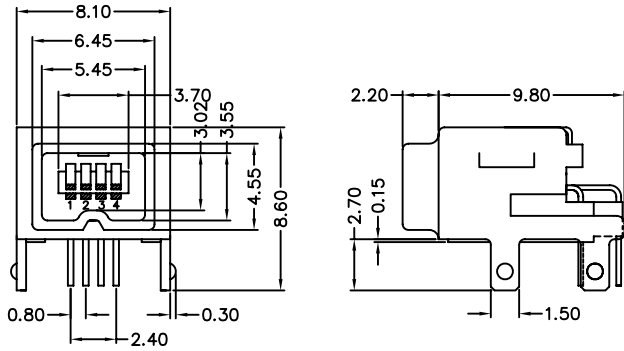

984-51-604221

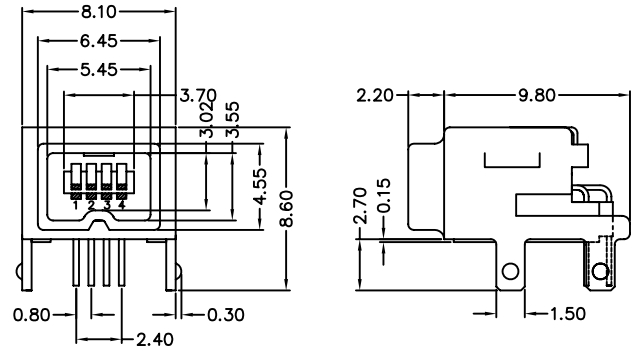

## ■ Recommended P.C.B Layout

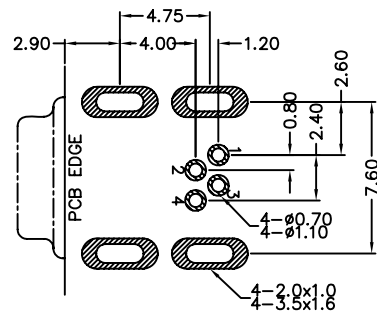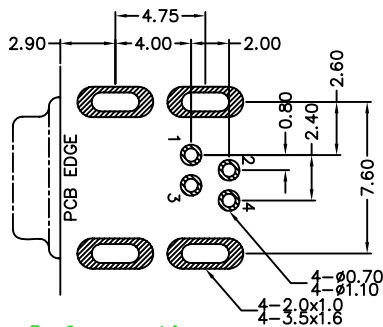

## ■ Order Information

984-5 1 - 604 2 x 1  
1 2 3

1. 1: Tray package
2. No. of contacts
3. 1: Left Layout (P=2.0)  
2: Right Layout (P=1.2)

Standard Parts
984-51-604211
984-51-604221

Unit: mm