



Mini Din Connector Stack Type

MATERIAL

Insulator : Polyester
 Contact Pin : Copper Alloy
 Shell : Brass


SPECIFICATION

Current Rate : 1 AMP at 250V DC
 Insulation Resistance : 1000MΩMin. at DC 500V
 Contact Resistance : 30mΩMax. at DC 100mA




Detail Dimensions



983-21-0040x1

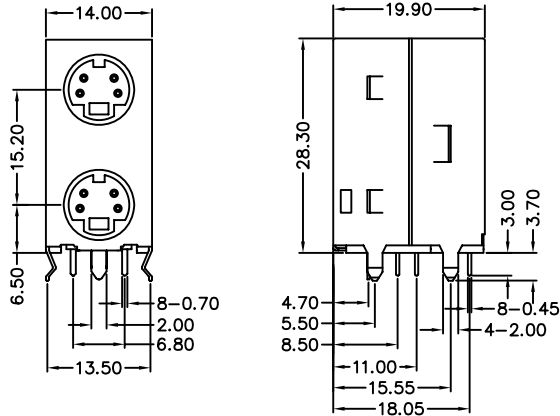

983-21-0060x1

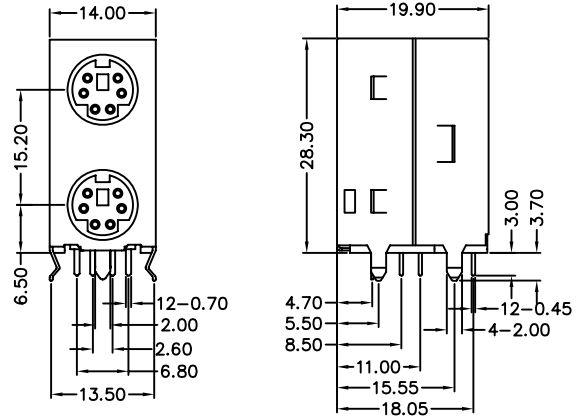

Recommended P.C.B Layout



Order Information

983-2 1 - 0xx x x 1
 1 2 3 4

1. 1: Tray package
2. No. of contacts
3. 2: without Spring
3: with Spring
4. 0: Black Insulator
1: Green (Top) ; Purple(Down)

Standard Parts
983-21-0xx2x1
983-21-0xx3x1

Unit: mm