


Single Phase Rectifier Bridges Slim Version

PSBS 192

I_{dAV} = 174 A
 V_{RRM} = 800-1800 V

Preliminary Data Sheet

V_{RSM} V	V_{RRM} V	Type
800	800	PSBS 192/08
1200	1200	PSBS 192/12
1400	1400	PSBS 192/14
1600	1600	PSBS 192/16
1800	1800	PSBS 192/18

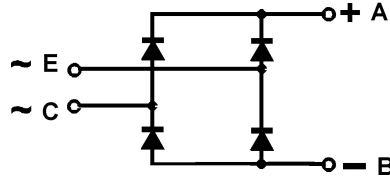

Symbol	Test Conditions	Maximum Ratings
I_{dAV}	$T_C = 100^\circ\text{C}$, module	174 A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$ $t = 10\text{ ms}$ (50 Hz), sine	2800 A
	$V_R = 0$ $t = 8.3\text{ ms}$ (60 Hz), sine	3300 A
	$T_{VJ} = T_{VJM}$ $t = 10\text{ ms}$ (50 Hz), sine	2500 A
	$V_R = 0$ $t = 8.3\text{ ms}$ (60 Hz), sine	2750 A
$\int i^2 dt$	$T_{VJ} = 45^\circ\text{C}$ $t = 10\text{ ms}$ (50 Hz), sine	39200 $\text{A}^2\text{ s}$
	$V_R = 0$ $t = 8.3\text{ ms}$ (60 Hz), sine	45000 $\text{A}^2\text{ s}$
	$T_{VJ} = T_{VJM}$ $t = 10\text{ ms}$ (50 Hz), sine	31200 $\text{A}^2\text{ s}$
	$V_R = 0$ $t = 8.3\text{ ms}$ (60 Hz), sine	31300 $\text{A}^2\text{ s}$
T_{VJ}	-40 ... + 150	$^\circ\text{C}$
T_{VJM}	150	$^\circ\text{C}$
T_{stg}	-40 ... + 125	$^\circ\text{C}$
V_{ISOL}	50/60 HZ, RMS $t = 1\text{ min}$	2500 V ~
	$I_{ISOL} \leq 1\text{ mA}$ $t = 1\text{ s}$	3000 V ~
M_d	Mounting torque (M6)	5 Nm
	Terminal connection torque (M6)	5 Nm
Weight	typ.	225 g

Features

- Low profile (overall height: 17 mm)
- Package with screw terminals
- Isolation voltage 3000 V~
- Planar glasspassivated chips
- Blocking voltage up to 1800 V
- Low forward voltage drop
- UL release applied, RoHS conform

Applications

- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Advantages



- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability

Package, style and outline

Dimensions in mm (1mm = 0.0394")

Symbol	Test Conditions	Characteristic Value
I_R	$V_R = V_{RRM}$ $T_{VJ} = 25^\circ\text{C}$	$\leq 0.3\text{ mA}$
	$V_R = V_{RRM}$ $T_{VJ} = T_{VJM}$	$\leq 5\text{ mA}$
V_F	$I_F = 150\text{ A}$ $T_{VJ} = 25^\circ\text{C}$	$\leq 1.43\text{ V}$
V_{TO}	For power-loss calculations only	0.8 V
r_T	$T_{VJ} = T_{VJM}$	2.2 $\text{m}\Omega$
R_{thJC}	per diode; DC current	0.45 K/W
	per module	0.11 K/W
R_{thJK}	per diode; DC current	0.6 K/W
	per module	0.15 K/W
d_S	Creeping distance on surface	10 mm
d_A	Creeping distance in air	9.4 mm
a	Max. allowable acceleration	50 m/s^2

Max. allowed screw-in depth: 7.2 mm

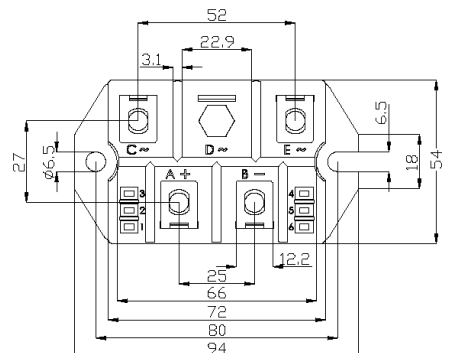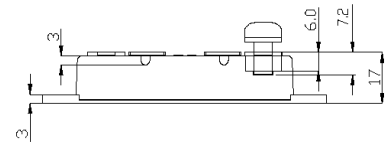

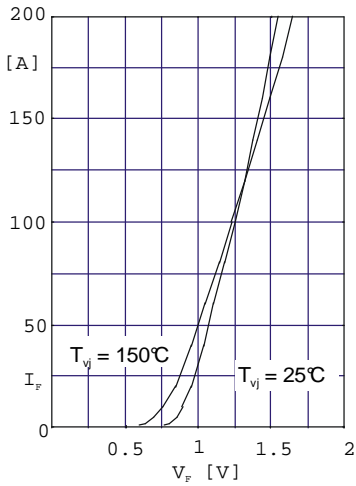


Fig. 1 Forward current versus voltage drop per diode

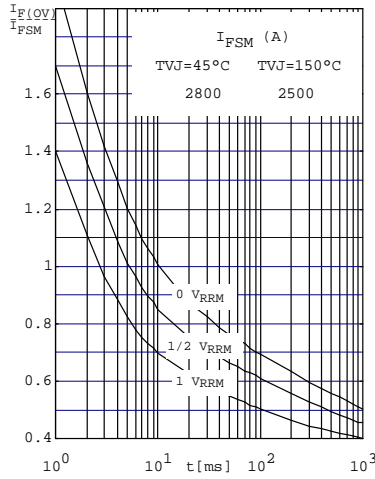


Fig. 2 Surge overload current per diode I_{FSM} : Crest value. t : duration

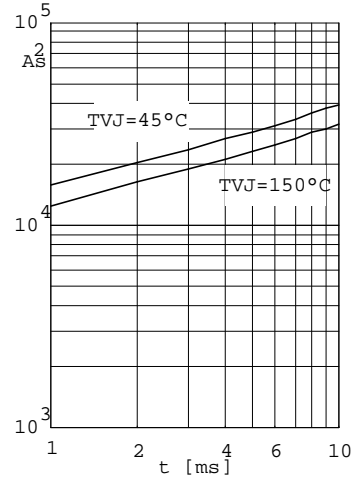


Fig. 3 $\int i^2 dt$ versus time (1-10ms) per diode (or thyristor)

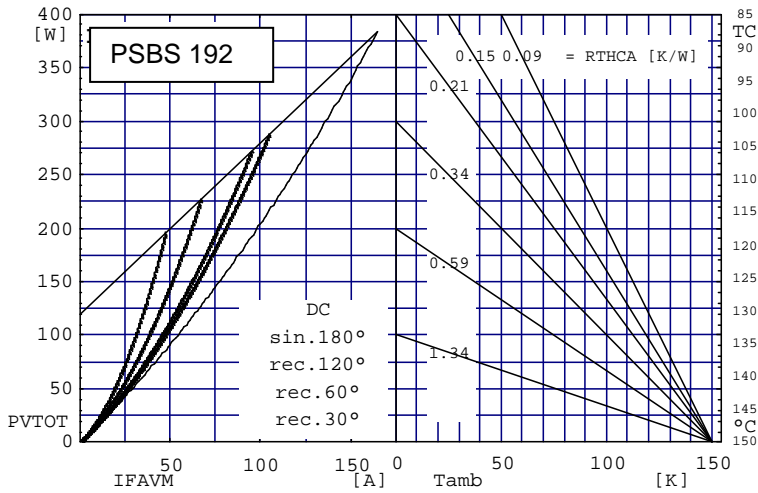


Fig. 4 Power dissipation versus direct output current and ambient temperature

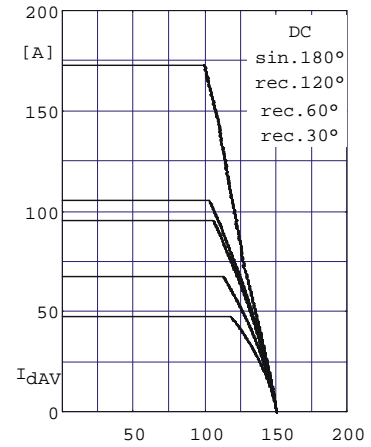


Fig. 5 Maximum forward current at case temperature

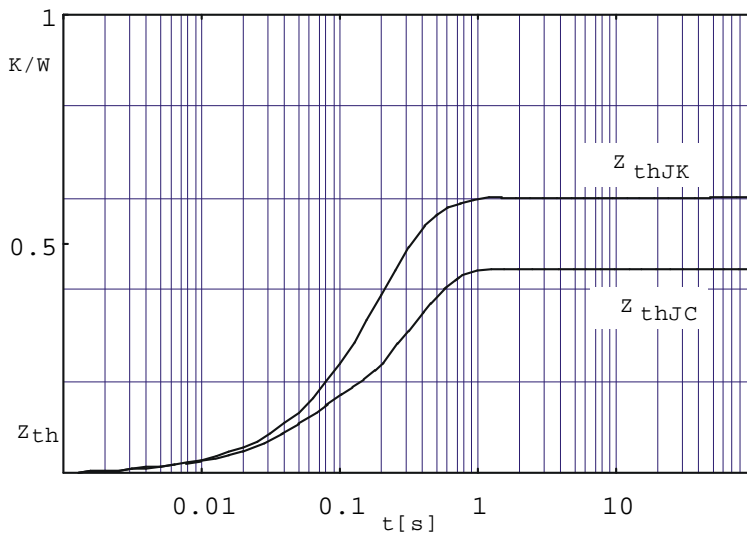


Fig. 6 Transient thermal impedance per diode (or thyristor), calculated