

**KEY FEATURES**

- Switching Power Module for PCB Mountable
- Fully Encapsulated Plastic Case
- Universal Input Range 90-264VAC, 47-440 Hz
- Regulated Output
- Low Ripple and Noise
- Small Size But Higher Wattage
- Screw Terminal For Optional
- CE, CB and UL Approval
- 3-Years Product Warranty


**ELECTRICAL SPECIFICATIONS**


| Model No. ( Single Output ) | AKC-3.3S                        | AKC-5S   | AKC-7.35S | AKC-9S  | AKC-12S | AKC-15S | AKC-24S |
|-----------------------------|---------------------------------|----------|-----------|---------|---------|---------|---------|
| Max output wattage ( W )    | 14.85W                          | 20W      | 20W       | 20W     | 20W     | 20W     | 20W     |
| Output                      | Voltage (V.DC.)                 | 3.3V     | 5V        | 7.35V   | 9V      | 12V     | 24V     |
|                             | Current (mA) max                | 4500     | 4000      | 2730    | 2230    | 1670    | 840     |
|                             | Voltage set accuracy            | ±2%      | ±2%       | ±2%     | ±2%     | ±2%     | ±2%     |
|                             | Line Regulation (LL-HL) (typ.)  | 0.5%     | 0.5%      | 0.5%    | 0.5%    | 0.5%    | 0.5%    |
|                             | Load Regulation (0-100%) (typ.) | 1%       | 1%        | 1%      | 1%      | 1%      | 1%      |
|                             | Minimum load                    | 0%       | 0%        | 0%      | 0%      | 0%      | 0%      |
|                             | Efficiency (typ.)               | 75%      | 79%       | 82%     | 82%     | 83%     | 84%     |
|                             | Capacitor Load (max.)           | 25000 uF | 13000 uF  | 2200 uF | 1100 uF | 920 uF  | 820 uF  |

| Model No. ( Dual Output ) | AKC-5D                           |          | AKC-12D  |          | AKC-15D  |          |          |
|---------------------------|----------------------------------|----------|----------|----------|----------|----------|----------|
| Max output wattage ( W )  | 20W                              |          | 20W      |          | 20W      |          |          |
| Output                    |                                  | Output 1 | Output 2 | Output 1 | Output 2 | Output 1 | Output 2 |
|                           | Voltage (V.DC.)                  | +5V      | -5V      | +12V     | -12V     | +15V     | -15V     |
|                           | Current (mA) max                 | 2000     | 2000     | 833      | 833      | 667      | 667      |
|                           | Voltage set accuracy             | ±2%      |          | ±2%      |          | ±2%      |          |
|                           | Line Regulation (LL-HL) (typ.)   | ±0.5%    |          | ±0.5%    |          | ±0.5%    |          |
|                           | Load Regulation (10-100%) (typ.) | ±3%      |          | ±3%      |          | ±3%      |          |
|                           | Minimum load                     | 0%       |          | 0%       |          | 0%       |          |
|                           | Efficiency (typ.)                | 79%      |          | 82%      |          | 82%      |          |
|                           | Capacitor Load (max.)            | ±4300 uF |          | ±560 uF  |          | ±220 uF  |          |

| Model No. ( Triple Output ) | AKC-5S12D                        |                   |          | AKC-5S15D |                   |          |          |
|-----------------------------|----------------------------------|-------------------|----------|-----------|-------------------|----------|----------|
| Max output wattage ( W )    | 20W                              |                   |          | 20W       |                   |          |          |
| Output                      |                                  | Output 1          | Output 2 | Output 3  | Output 1          | Output 2 | Output 3 |
|                             | Voltage (V.DC.)                  | 5                 | +12      | -12       | 5                 | +15      | -15      |
|                             | Current (mA) max                 | 2800              | 250      | 250       | 2800              | 200      | 200      |
|                             | Voltage set accuracy             | ±2%               |          | ±2%       | ±2%               |          | ±2%      |
|                             | Line Regulation (LL-HL) (typ.)   | 1%                | 5%       |           | 1%                | 5%       |          |
|                             | Load Regulation (20-100%) (typ.) | 2%                | 5%       |           | 2%                | 5%       |          |
|                             | Minimum load                     | 10%               |          |           | 10%               |          |          |
|                             | Efficiency (typ.)                | 81%               |          |           | 81%               |          |          |
|                             | Capacitor Load (max.)            | 3500 uF / ±220 uF |          |           | 3500 uF / ±150 uF |          |          |

|             |                                     |   |
|-------------|-------------------------------------|---|
| Input       | Voltage                             | 90-264 VAC or 100-375 VDC   |
|             | Frequency (Hz)                      | 47-440 Hz   |
|             | Current (Full load)                 | 400 mA max. (115 VAC) / 270 mA max. (230 VAC)                         |
|             | Inrush current (<2ms)               | 30 A max. (115 VAC) / 50 A max. (230 VAC)                             |
|             | Leakage Current                     | 0.25 mA   |
|             | External Fuse (recommend)           | 2 A slow blow type  |
|             | Power Saving                        | 230V < 0.5W   |
| Output      | Ripple                              | <0.2% Vout +40mV max (Vp-p)   |
|             | Noise                               | <0.5% Vout +50mV max (Vp-p)   |
|             | Hold-up time (typ.)                 | 13 ms min.  |
|             | Switching frequency                 | 100 kHz   |
| Protection  | Over current protection             | Above 105% rated output power   |
|             | Over voltage protection             | Zener diode clamp   |
|             | Short circuit protection            | Hiccup mode, indefinite (automatic recovery)                          |
| Isolation   | Input-Output (V.AC)                 | 3000V   |
|             | Input-FG (V.AC)                     | 3000V   |
|             | Output-FG (V.AC)                    | 500V  |
| Environment | Operating temperature               | -25°C...+70°C (with derating)   |
|             | Storage temperature                 | -40°C...+85°C   |
|             | Temperature coefficient             | 0.02%/°C  |
|             | Humidity                            | 95% RH  |
|             | MTBF                                | >200,000 h @ 25°C (MIL-HDBK-217F)                                     |
| Physical    | Dimension (L x W x H)               | 2.76 x 1.89 x 0.87 Inches ( 70.0 x 48.0 x 22.0 mm ) Tolerance ±0.5 mm |
|             | Case Material                       | Plastic resin + Fiberglass (flammability to UL 94V-0)                 |
|             | Weight                              | 110 g   |
|             | Cooling method                      | Free air convection   |
| Safety      | Agency Approvals                    | CE, UL/cUL, CB  |
| EMC         | EMI (Conducted & Radiated Emission) | EN 55022 class B  |
|             | EMS (Noise Immunity)                | EN 55024  |


1.All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

2.Ripple & Noise are measured at 20MHz of bandwidth with 0.1UF & 47UF parallel capacitor.


#### Note

- The triple output required a minimum 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices; however they may not meet all listed specification.
- Load regulation for triple output:  
Main output (V1): 20% to 100% with 20% to 100% balanced on auxiliaries.  
Auxiliary outputs (V2 and V3): 20% to 100% balanced on all outputs.
- Cross regulation for dual output: asymmetrical load 25% / 100% FL  
Cross regulation for triple output:  
Main output 100% load, auxiliary 100%,other auxiliary 25% to 100%.  
Auxiliary outputs(V2 and V3):main output 100% load, auxiliary 100%, other auxiliary 25% to 100% or main output 25%,auxiliary 25%,other auxiliary 25% to 100%.

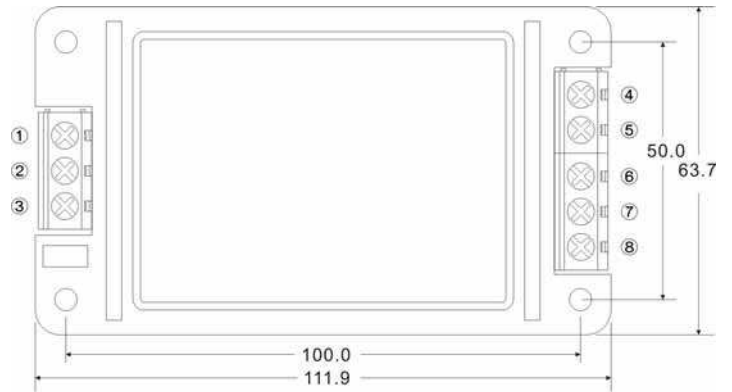

**SCREW TERMINAL**
**AKC-A2**


| PIN# | Single     | Dual       | Triple    |
|------|------------|------------|-----------|
| 1    | FG         | FG         | FG        |
| 2    | AC IN (N)  | AC IN (N)  | AC IN (N) |
| 3    | AC IN (L)  | AC IN (L)  | AC IN (L) |
| 4    | NO CONNECT | NO CONNECT | -DC OUT   |
| 5    | -DC OUT    | -DC OUT    | COMMON    |
| 6    | NO CONNECT | COMMON     | +DC OUT   |
| 7    | +DC OUT    | +DC OUT    | +5V RTN   |
| 8    | NO CONNECT | NO CONNECT | +5V OUT   |

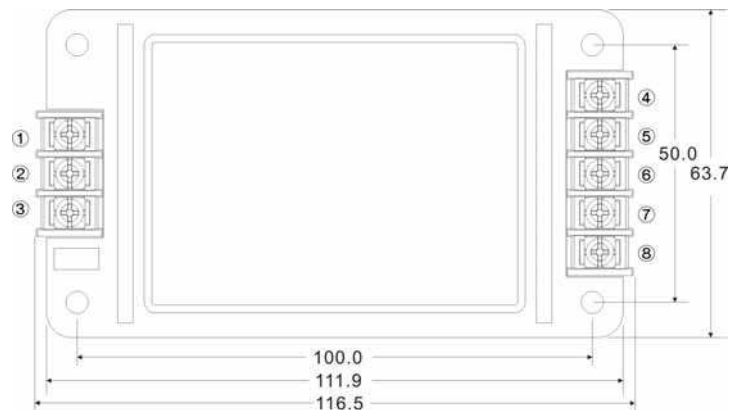
**AKC-A5**


| PIN# | Single     | Dual       | Triple    |
|------|------------|------------|-----------|
| 1    | FG         | FG         | FG        |
| 2    | AC IN (N)  | AC IN (N)  | AC IN (N) |
| 3    | AC IN (L)  | AC IN (L)  | AC IN (L) |
| 4    | NO CONNECT | NO CONNECT | -DC OUT   |
| 5    | -DC OUT    | -DC OUT    | COMMON    |
| 6    | NO CONNECT | COMMON     | +DC OUT   |
| 7    | +DC OUT    | +DC OUT    | +5V RTN   |
| 8    | NO CONNECT | NO CONNECT | +5V OUT   |

