


Heyco® Multi-Lockit™ Strain Relief Bushing

For Round and Flat Cables

- **Assembly friendly!** Independent of insertion into the panel, Lockit Strain Reliefs **self-lock** onto the cable. Preassemble off line for final assembly at a later time or remote location, for lower installed cost!
- Large mounting hole design allows passage of plugs or bulky assemblies during Lockit installation.
- Lockit Strain Reliefs hold so well they pass the UL pull-out test requirements with or without panel support.
- Protect the lifeline of your electric/electronic products by absorbing the forces of push and pull that may be exerted on the flexible power cord. Rectangular design eliminates the possibility of part rotation under forces of twist.
- Fingertip pressure snaps the Lockit into the mounting hole.
- ST-101A designed to be installed in a U shape panel slot (see schematic). Securely anchors, insulates, and protects cables at panel entry point. Slim head profile makes Lockits design-specific.
- Heyco’s automated Pre-Assembly Equipment speeds assembly of the Lockit onto the cable and thus lowers costs while greatly reducing risk of carpal tunnel syndrome. See pages 4-15 & 4-16.
- Consult Heyco for other wire types and sizes.

UL Type	WILL FIT THESE CABLES			PANEL DIMENSIONS				PART NO.	DESCRIPTION
	AWG/Conductors	Approximate Size		Mounting Hole Size		Thickness			
		in.	mm.	in.	mm.	in.	mm.	Black	
Round Cable		.250	6,4						
Flat Cable SPT-3	18/3	.173 x .380	4,39 x 9,65	1.142 x 1.142	29,0 x 29,0	.032	0,8	1843	LSR1939-300

Standard color black. Consult Heyco for white and other colors.


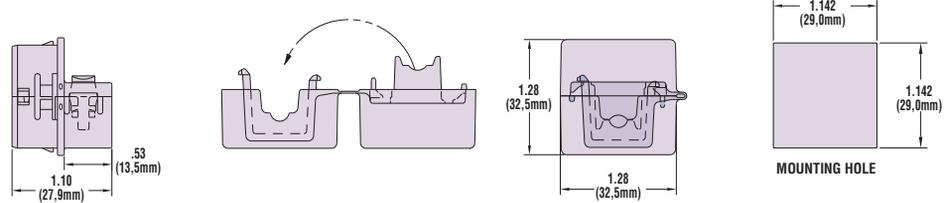


Heyco® ST Lockit™ Strain Relief Bushing for U-Shape Slot

For Round and Flat Cables

UL Type	WILL FIT THESE CABLES			PANEL DIMENSIONS				PART NO.	DESCRIPTION
	AWG/Conductors	Approximate Size		Mounting Hole Size		Thickness			
		in.	mm.	in.	mm.	in.	mm.	Black	
SV & SVT	18/2	.220	5,6	.453 x .512	11,5 x 13,0	.062	1,6	1839	ST-101A
		.245	6,2						
	18/3	.250	6,4						
HPD	18/2	.270	6,9						
	16/2	.290	7,4						

Standard color black. Consult Heyco for white and other colors.

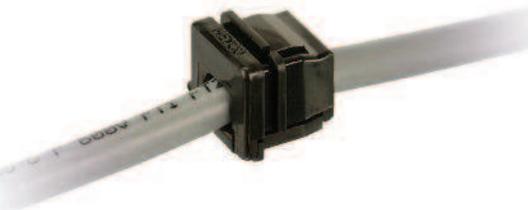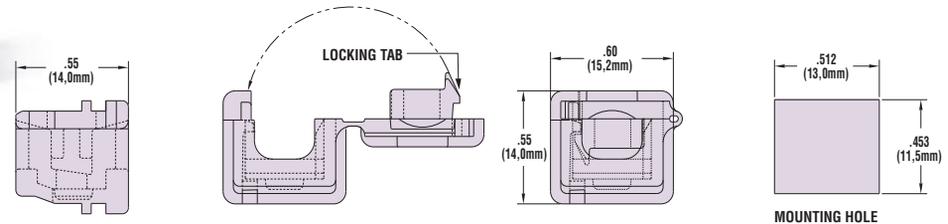

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E15331 Canadian Certified by Canadian Standards Association File 8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)