






- Bumpers can be used as mounting feet to prevent equipment from sliding or moving.
- Designed for through hole installation.
- 60-70 Durometer Range.
- 29 sizes available that will accommodate various mounting holes and panel thicknesses.
- Pocket Bumpers are constructed of SBR with an operating temperature range of -40°F (-40°C) to 221°F (105°C).
- Provide vibration dampening.

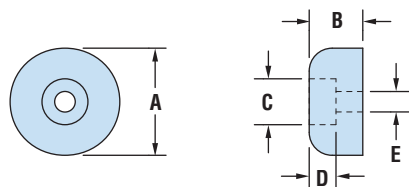

Type RS

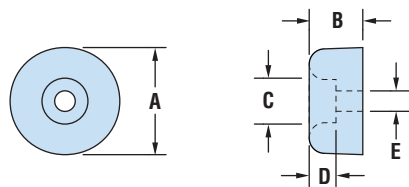

Type RR

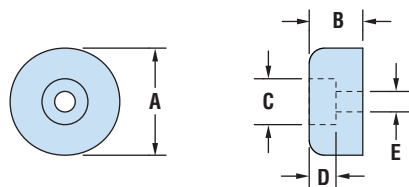

Type S

Heyco® Screw-On Rubber Pocket Bumpers

PART DIMENSIONS								BLACK PART NO.		E Fastner Hole Dia.*	
A Outside Diameter		B Overall Height		C Recess Diameter		D Recess Depth		No Washer	With Steel Washer		
in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.
Type RS											
.50	12,7	.25	6,4	.25	6,4	.16	4,0	-	G2201	.13	3,2
.63	15,9	.38	9,5	.25	6,4	.19	4,7	-	G2205		
.75	19,1	.38	9,5	.32	7,9	.19	4,7	-	G2209	.16	4,0
.81	20,6	.72	18,3	.38	9,5	.28	7,1	-	G2213	.22	5,5
1.00	25,4	.81	20,6	.25	6,4	.44	11,1	-	G2217	.13	3,2
		1.00	25,4	.31	7,9	.63	15,9	G2220	G2221	.16	4,0
1.09	27,7	.63	15,9	.44	11,1	.41	10,3	-	G2225	.19	4,7
Type RR											
.50	12,7	.25	6,4	.25	6,4	.16	4,0	-	G2229	.09	2,4
.75	19,1	.56	14,3	.38	9,5	.25	6,4	-	G2233	.19	4,7
		.75	19,1	.31	7,9	.25	6,4	-	G2237	.13	3,2
.81	20,6	.81	20,6	.47	11,9	.44	11,1	-	G2241	.25	6,4
.94	23,8	.35	8,9	.38	9,5	.18	4,6	-	G2245	.19	4,7
		.38	9,5	.38	9,5	.22	5,5	G2244	-		
.97	24,6	.34	8,7	.38	9,5	.19	4,7	-	G2249		
1.00	25,4	.44	11,1	.38	9,5	.19	4,7	-	G2253		
		.50	12,7	.50	12,7	.25	6,4	-	G2257	.22	5,5
		.56	14,3	.53	13,5	.31	7,9	-	G2261	.28	7,1
1.25	31,8	1.25	31,8	.38	9,5	.75	19,1	-	G2267	.25	6,4
		1.88	47,6	.38	9,5	.75	19,1	-	G2271		
1.50	38,1	.63	15,9	.50	12,7	.34	8,7	-	G2275	.19	4,7
		.75	19,1	.75	19,1	.34	8,7	G2278	G2279	.31	7,9
1.70	43,2	1.12	28,4	.60	15,2	.72	18,3	G2286	-	.38	9,6
		1.66	44,5	.62	15,9	.50	12,7	G2290			
2.50	63,5	1.00	25,4	1.13	28,6	.50	12,7	G2294			
		2.00	50,8	1.13	28,6	1.25	28,6	G2296†			
								G2298†			
Type S											
1.00	25,4	.50	12,7	.36 / .43	9,0 / 10,9	.20 / .16	5,0 / 4,1	-	G2307	.19	4,7
1.50	38,1	.75	19,1	.75	19,1	.38	9,5	-	G2311	.25	6,4

Standard color black. Standard material SBR (Styrene Butadiene Rubber), 60-70 durometer.

*Fastener not included.

†Part Nos. G2296 and G2298 are made from White SBR, 60-70 durometer.

Quick
Specs

Material SBR
Temperature Range -40°F (-40°C) to 221°F (105°C)