





# Heyco® Modular Connector System - Male & Female Connectors

Recognized for Use in the U.S. under File E231361

- **Small (5/8" Diameter) connectors** for plugging lighting fixtures together.
- Patented, keyed three conductor male and female connectors.
- Snap-in construction for insertion into DD holes without rotation.
- 1/16" spacing between fixtures when plugged together.
- End-to-end connection as in covers or under cabinets.
- Interconnects help keep down high labor installation costs when more than one fixture is involved.

DESCRIPTION	WIRE				PART NO.	PANEL DIMENSIONS						CONNECTOR TERMINATION (inside application)
	Volts-Amps	Type	Gauge AWG-Cond	Color		Length L* in.	A Mounting Hole Dia. in.   mm.		B To Prevent Rotation in.   mm.		Max. Panel Thickness in.   mm.	
<b>Modular Cordset Component - Male Connector</b>												
120V-7A	SPT-2	18-3	White	12	S7553	.625	15,9	.580	14,7	.045	1,1	.110 x .020 Quick Connect
<b>Modular Cordset Component - Female Connector</b>												
120V-7A	SPT-2	18-3	White	12	S7551	.625	15,9	.580	14,7	.045	1,1	.110 x .020 Quick Connect

\* Consult Heyco for any required length not shown.

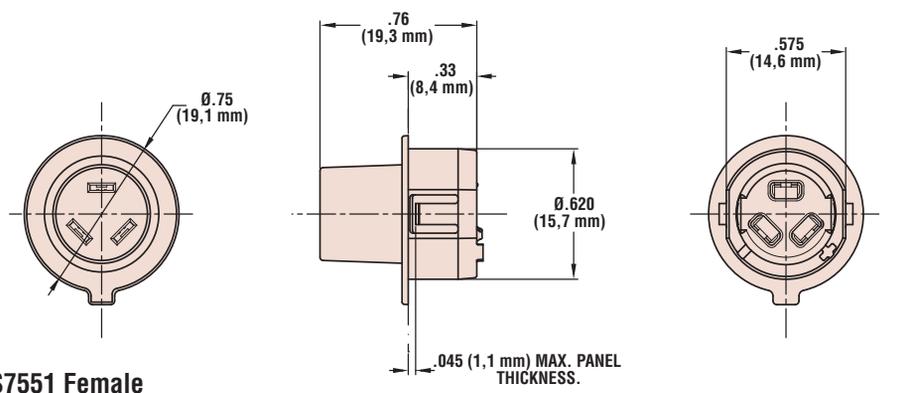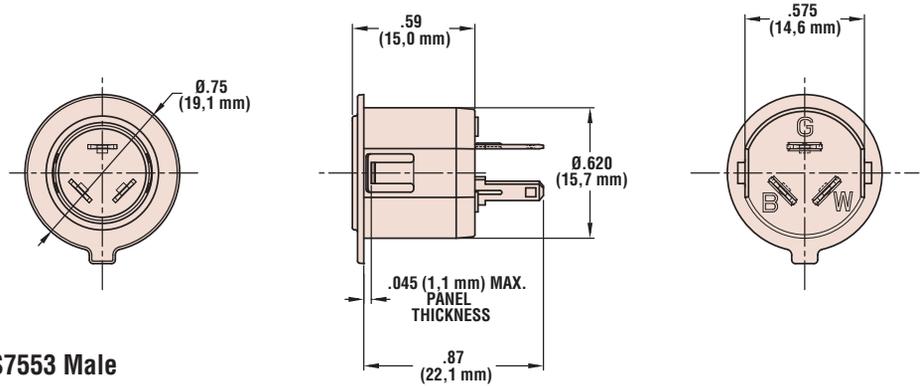

Quick  
Specs

Materials Nylon 6/6 and Alloy 260 Brass  
 Certifications Recognized Component under UL File E231361  
 Flammability Rating 94V-2