

Heyco® Preassembled Cordset Components


For Heyco Application Equipment, see pages 8-57 & 8-58

Tri-Tap Premold-NEMA 5-15R


- Multiple piece unit that reduces the number of crimp connections on a Tri-Tap extension cord from 9 down to 3. **Now you can crimp all 3 terminals at once.**
- Significantly reduce the amount of material required for overmolding, substantially **reducing the cycle time and cost.**
- Available in assembled or component form.
- **Heyco Contacts MUST be used in Heyco pre-molds.**

PART DATA			PART NO.	APPLICATION TOOLING*		
Type	Color	AWG Range		Die**	Crimp Punch	Anvil
Female Receptacle	Black	18-14	S7403	S7403SXX5	C862, C863	C851
		14-10	S7400	S7400SXX5	C856, C857	


* Use the Heyco Standard Applicator Die (indicated by the second “S” in the Die Part No.), page 8-57.
 ** “XX” represents Wire Gauge. Please specify Wire Gauge when ordering.

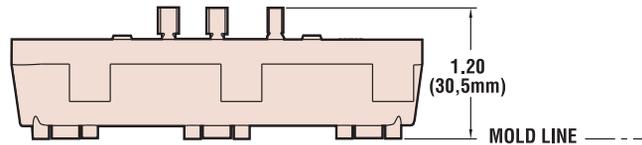

S7403

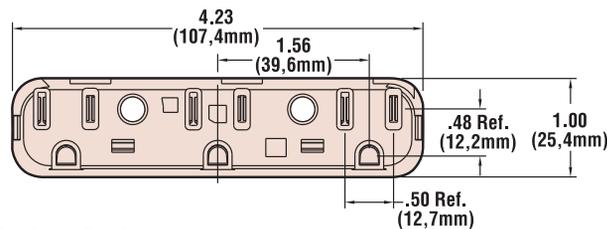

S7403 & S7400

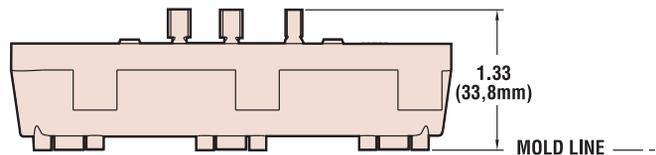

S7400

Components For Tri-Tap Premold

- **S7403**
 - 0387 Tri-Tap Body for S7403 and S7400 (see page 8-20)
 - 0388 Tri-Tap Cover for S7403 and S7400 (see page 8-20)
 - 8077 Tri-Tap Blade (18-14 AWG)
 - 8078 Tri-Tap Blade (18-14 AWG)
 - 8092 Tri-Tap Ground (18-14 AWG)
- **S7400**
 - 8075 Tri-Tap Blade (14-10 AWG)
 - 8076 Tri-Tap Blade (14-10 AWG)
 - 8087 Tri-Tap Ground (14-10 AWG)

Quick Specs

Materials	Alloy 260 Brass (70% Cu, 30% Zn. Higher Cu content resists dezincification) 6/6 Nylon
Standards	NEMA 5-15R
Voltage/Current Rating	125 Volts, 15 Amps