
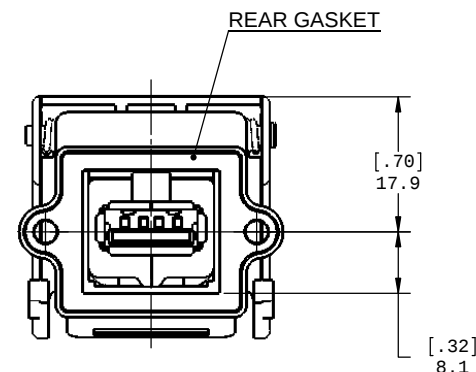
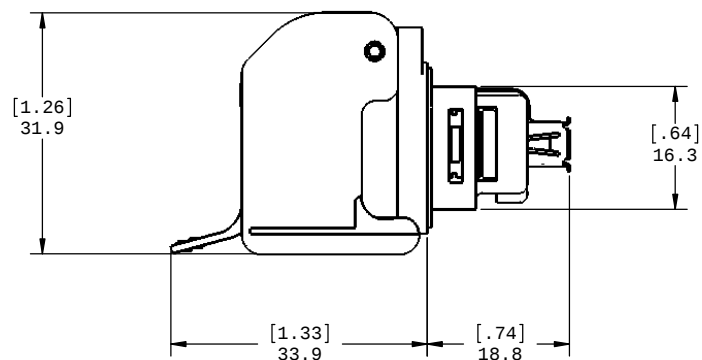


REV	DESCRIPT	DATE	APPRVD
.	.	.	.
.	.	.	.
.	.	.	.

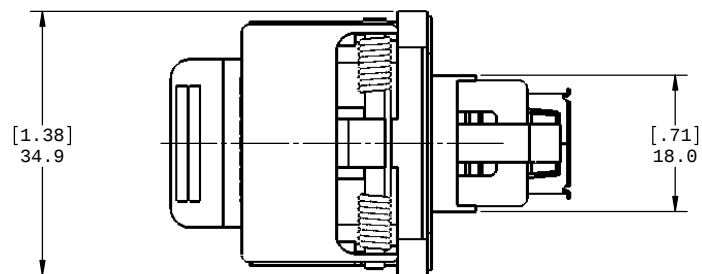

CONNECTOR WITH COVER CLOSED


SPRING LOADED COVER
WITH GASKET

SHELL

PLUG SEALING GASKET
(SUPPLIED FOR ID751-000 ONLY)

SELF-SEALING
4-40 UNC SCREW
7.9 [.313] LENGTH

MUSB INSERT

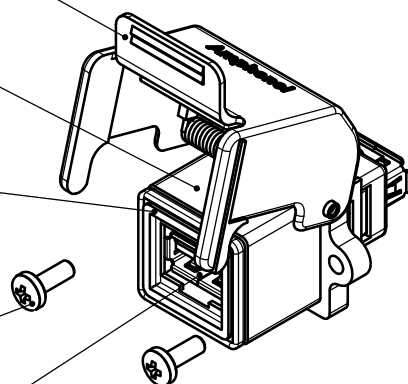


NOTES:

1. MATERIAL:
 - SHELL: ZINC ALLOY DIE CAST, 3 MICRONS [120 μ"] MIN NICKEL OVERALL.
 - COVER: ZINC ALLOY DIE CAST, 3 MICRONS [120 μ"] MIN NICKEL OVERALL.
 - SCREWS: STAINLESS STEEL.
 - HOUSING: HIGH TEMPERATURE THERMOPLASTIC, GLASS FILLED. FLAMMABILITY RATING UL94V-0, COLOR - BLACK.
 - CONTACTS: COPPER ALLOY.
 - GASKETS: SILICONE RUBBER.
2. OPERATING TEMPERATURE: -40°C TO +85°C.
3. ENVIROMENT PERFORMANCE: IP67.
4. CONNECTOR IS ROHS COMPLIANT PER EU DIRECTIVE 2002/95/EC AND AMENDMENTS.
5. PART NUMBER FOR ORDER IS ID451-000.




UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETER TOLERANCES ARE:		APPROVALS	DATE	Amphenol Canada Corp.		
		DRAWN S.SEMENOV	FEB27/07			
DECIMALS .XX ± .10 .X ± .25	ANGLES ± 1°	DESIGNED S.SEMENOV	FEB27/07	TITLE USB RECEPTACLE		
MATERIAL AND FINISH		CHECKED				
REF.		QA APP'D		SIZE C		DWG. NO. P-ID451-000
CODE IDENT. NO.		IE APP'D		SCALE 2:1		REV. 1C
		DWG APP'D A.GREEN	FEB27/07	PROJECT ID		SHEET 1 OF 2

REV	DESCRIP	DATE	APPRVD

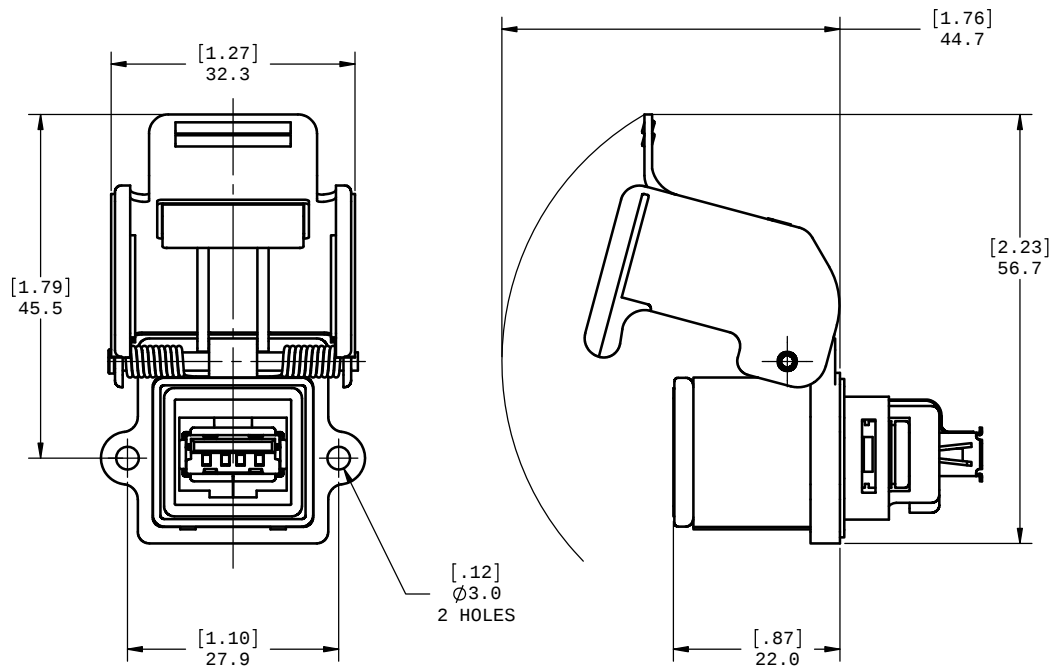

CONNECTOR WITH COVER OPENED

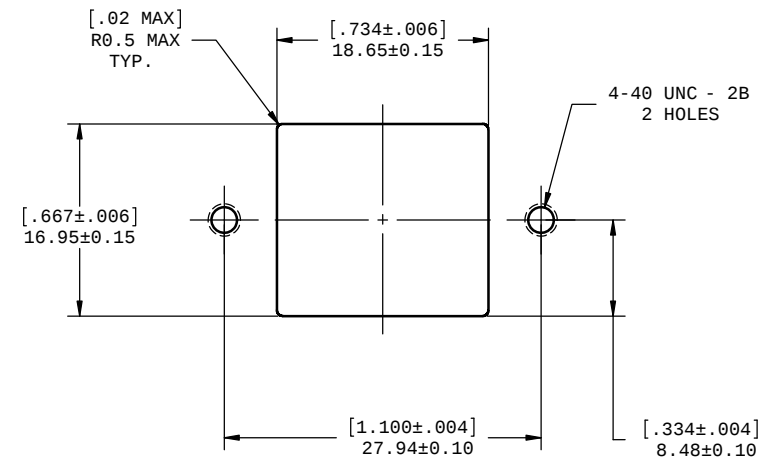

PANEL CUTOUT



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETER TOLERANCES ARE:		APPROVALS	DATE	Amphenol Canada Corp.		
		DRAWN S.SEMENOV	FEB27/07			
DECIMALS .XX $\pm$.10 .X $\pm$.25	ANGLES $\pm$ 1°	DESIGNED S.SEMENOV	FEB27/07	TITLE USB RECEPTACLE		
MATERIAL AND FINISH		CHECKED				
		QA APP'D				
REF.		IE APP'D		SIZE C	DWG. NO. P-ID451-000	REV. 1C
CODE IDENT. NO.		DWG APP'D A.GREEN	FEB27/07	SCALE 2:1	PROJECT ID	SHEET 2 OF 2

DO NOT SCALE DRAWING
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE
OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.