

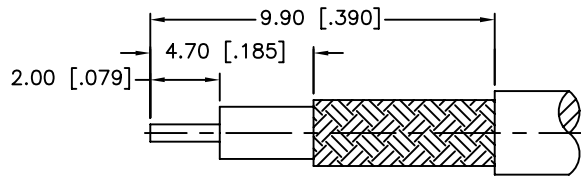
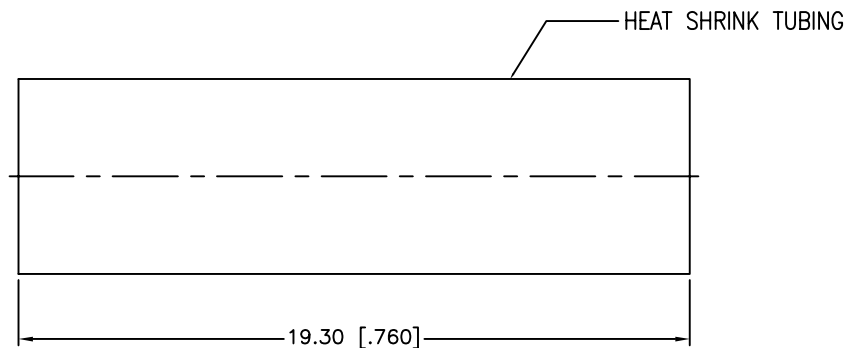
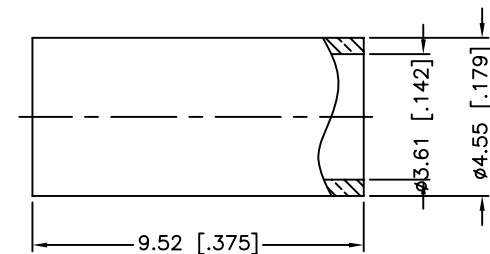


REV.	DATE	ECR NO.	DESCRIPTION
NC	12/17/09	XXXXXX	INITIAL RELEASE

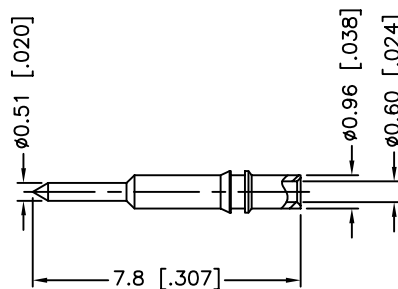

RECOMMENDED
CABLE STRIPPING DIM'S

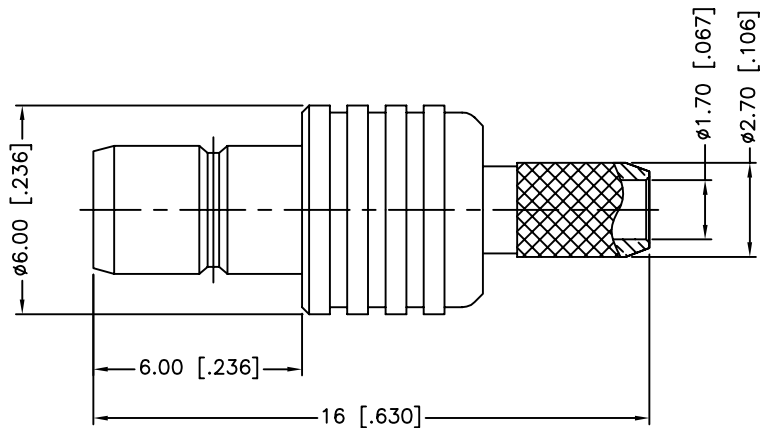

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.7mm

9				1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex							
8				1		DRAWN	C.WANG						12/17/09		
7	HEAT SHRINK TUBING		BLACK	1		CHECKED									
6	FERRULE	COPPER	NICKEL	1		ISSUED			PART DESCRIPTION						
5	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1		SMB CRIMP JACK (FOR RG-316U/D)						
4	BARREL	BRASS	NICKEL	1		PART NO.									
3	INSULATOR	PTFE	NATURAL	1		142182									
2	INSULATOR	PTFE	NATURAL	1		DWG. NO.									
1	BODY	BRASS	NICKEL	1		142182.DWG									
	DESCRIPTION	MATERIAL	FINISH	QTY		DO NOT SCALE DRAWING	C:/CONNEX/142182.DWG		DWG. NO.	142182.DWG	REV.	NC	SIZE	A	SCALE