

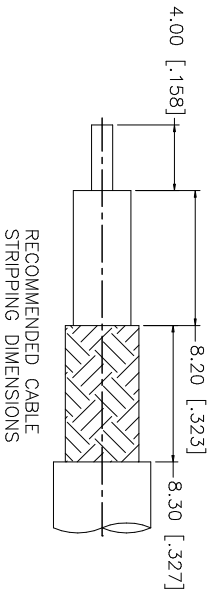



REV.	DATE	DESCRIPTION
NC	01/21/03	INITIAL RELEASE
A	10/10/05	ADD NOTE: 
B	10/31/05	CHANGE GASKET MATERIAL TO SILICONE



RECOMMENDED CABLE
STRIPPING DIMENSIONS

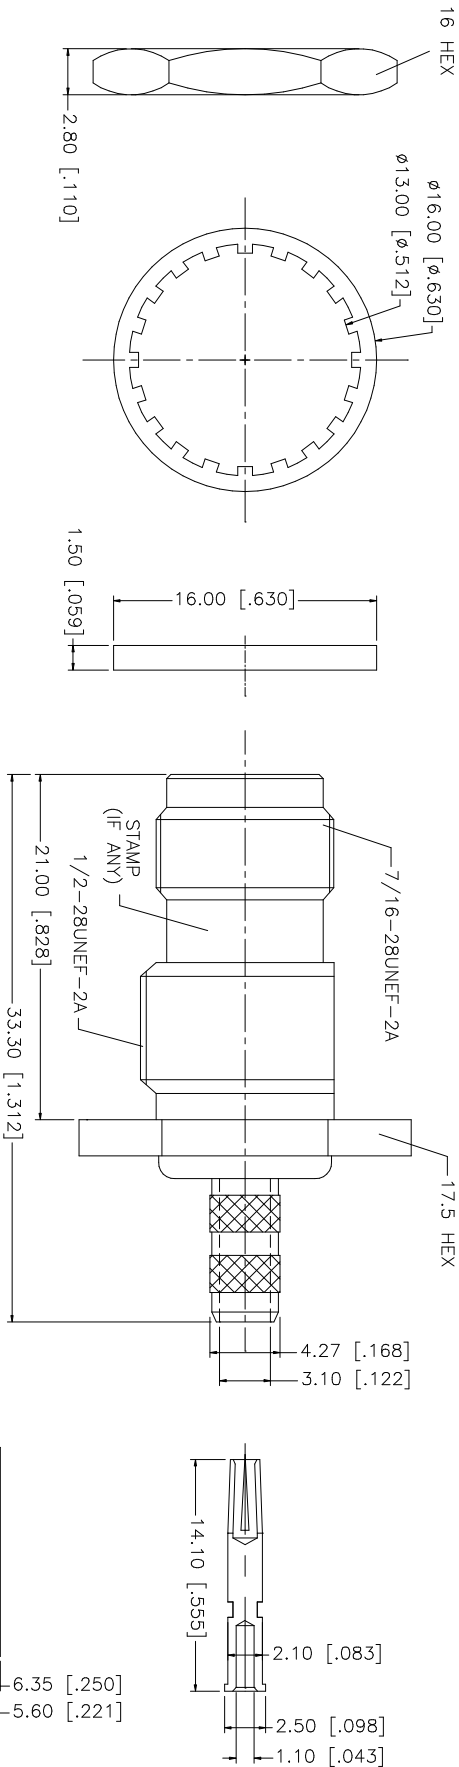

RECOMMENDED
MOUNTING HOLE

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
 3. MAX. PANEL THICKNESS = 6.5mm
 UL APPROVED.

8									
7	FERRULE	COPPER	NICKEL						
6	HEX NUT	BRASS	NICKEL	1					
5	LOCK WASHER	BRASS	NICKEL	1					
4	GASKET	SILICONE	RUBBER	1					
3	CONTACT PIN	PHOS. BRONZE	GOLD	1					
2	INSULATOR	TEFLON	NATURAL	1					
1	BODY	BRASS	NICKEL	1					
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/122/122479.DWG	DWG. NO. 122479.DWG	REV. B	SCALE NA

Amphenol Connex

TNC BULKHEAD CRIMP JACK
(FOR RG-142A/U, 223/U, 400/U CABLE)

122479