
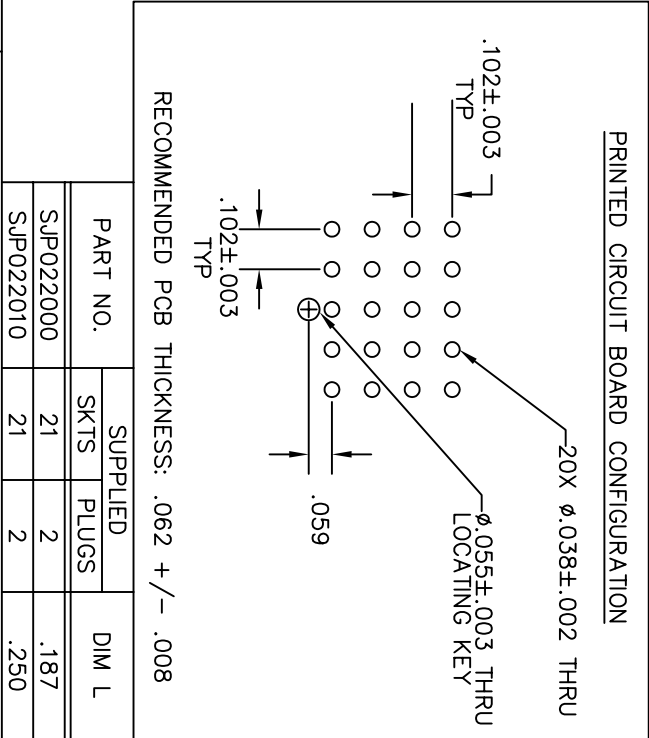


REV	ECN	APP'D
B	5132	

NOTES:

1. MATERIALS:
BODY: POLYETHERIMIDE PER MIL-P-46184.
GROMMET: SILICONE BLEND ELASTOMER PER ZZ-R-765.
CONTACT RETAINERS: STAINLESS STEEL 301, 1/2 HARD.
PIN CONTACTS: COPPER ALLOY, HARD GOLD PLATE
PER MIL-G-45204, TYPE I, GRADE C, CLASS 1.
2. PERFORMANCE SPECIFICATIONS:
OPERATING TEMP: -65° TO 200°C
INSULATION RESISTANCE: 5000 MEGOHMS MIN @ 25°C
DIELECTRIC WITHSTANDING VOLTAGE:
1500 VRMS AT SEA LEVEL
AND 200 VRMS AT 110,000 FT. ALTITUDE.
CURRENT RATING: 5 AMPS
VIBRATION AND SHOCK: PER MIL-T-81714,
PARAGRAPH 3.5.5 AND 3.5.8.
3. MODULE SUPPLIED WITH 21 M39029/22-191
SOCKET CONTACTS AND TWO (2) MS27488-22 SEALING
PLUGS.

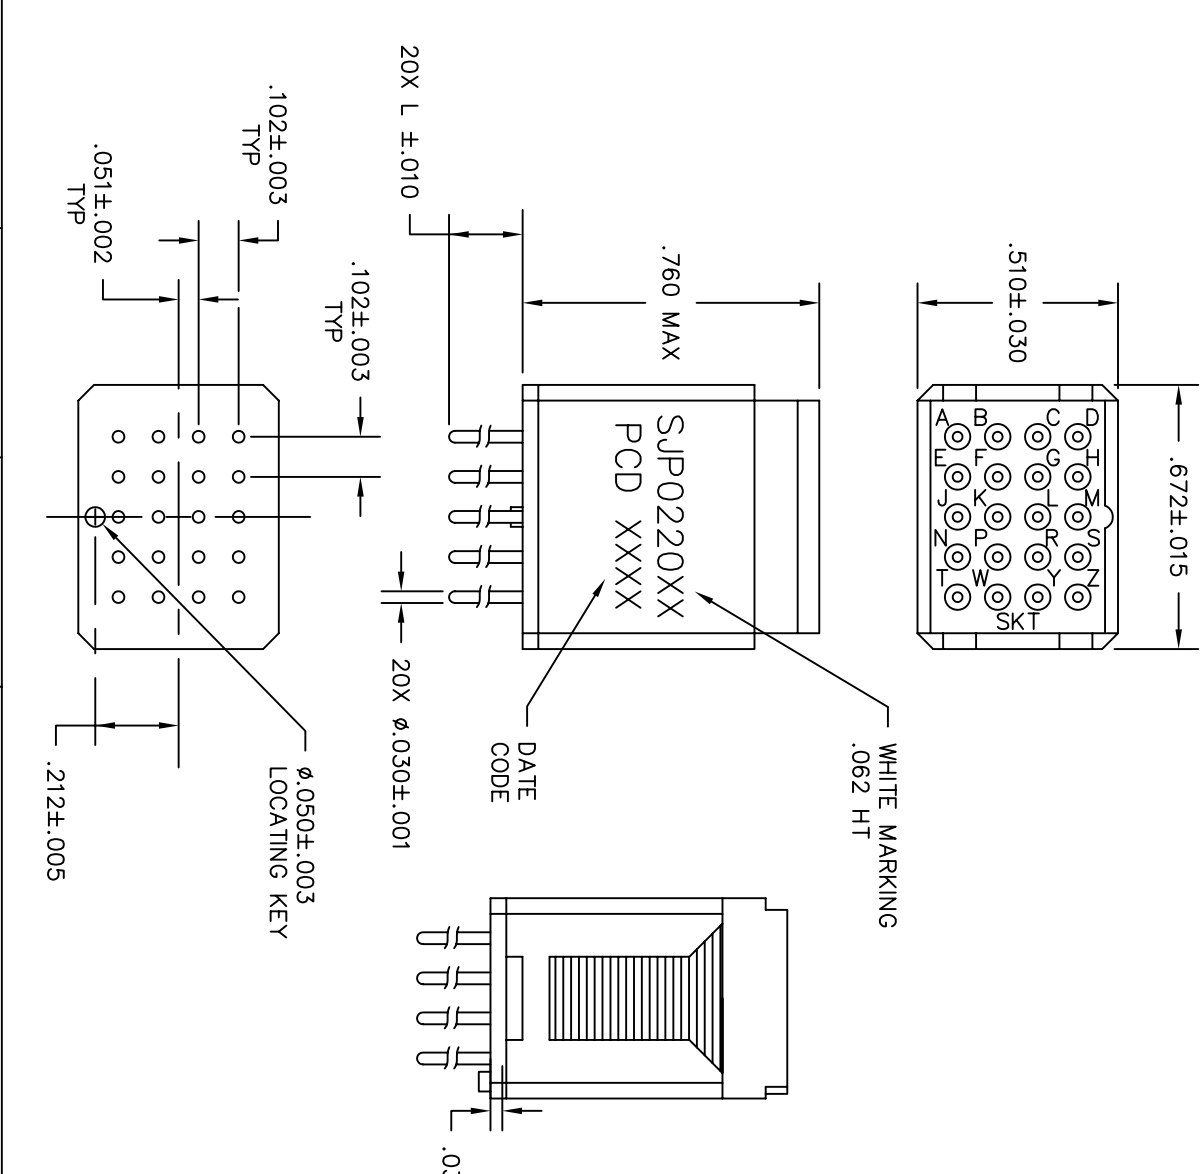

DIMENSIONS		TOLERANCES	PROJECTION	SPECIFICATION DRAWING		TITLE	
ANSI Y14.5M		.XX ±.01				SOCKET MODULE PCB MOUNT	
UNITS: INCHES		.XXX ±.005					
ACAD FILE		ANGLES ±2°					
ORIGINAL		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA		CHKD	SIZE	DWG NO.	REV
				APPD	A	SJP022000	B
						CODE: 58982	SHEET 1 OF 1