




REV.	DATE	DESCRIPTION
A	04/03/05	UPDATE DRAWING FORMAT

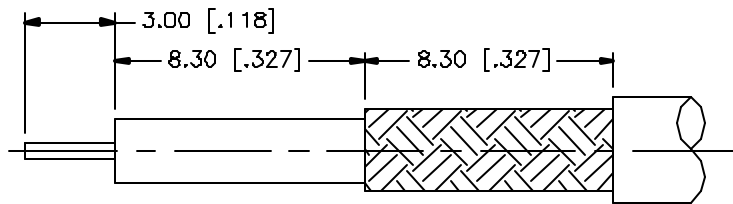


RECOMMENDED
CABLE STRIPPING DIM'S

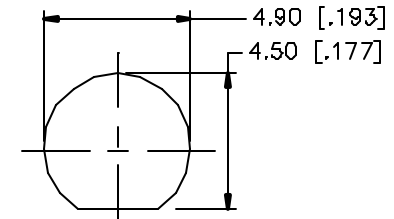



RECOMMENDED
MOUNTING HOLE



6 HEX NUT



7.80 [ø.307]
5.00 [ø.197]

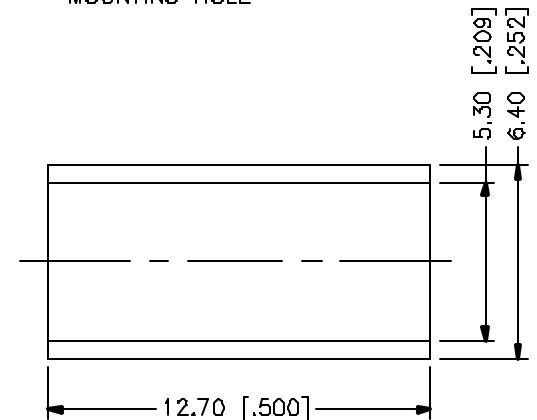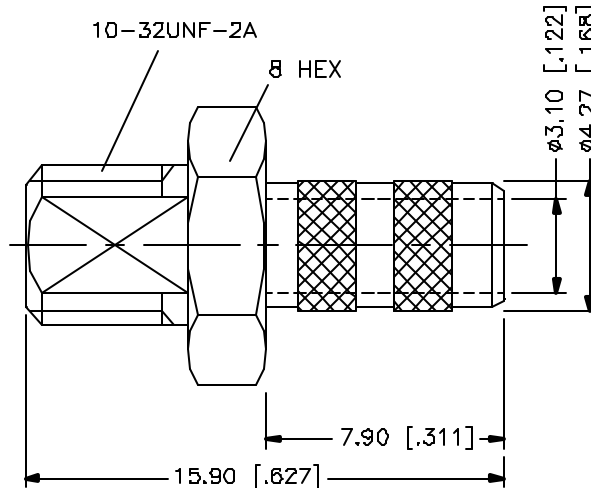

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex PART DESCRIPTION BULKHEAD CABLE TERMINATION (FOR RG-58C/U, 58/U CABLE) PART NO. 142271 DWG. NO. 142271 REV. A SIZE A SCALE NA			
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.				
6					0.5 - 8mm ± 0.20mm	CHECKED					
5					8 - 30mm ± 0.40mm	ISSUED					
4	FERRULE	COPPER	NICKEL	1	30 - 120mm ± 0.50mm	SHEET	1 OF 1				
3	HEX NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	CAD FILE		C:/142/2142271.DWG			
2	LOCK WASHER	BRASS	NICKEL	1	.020 - .315 = ± 0.007"						
1	BODY	BRASS	NICKEL	1	.315 - 1.180 = ± 0.015"						
					1.180 - 4.724 = ± 0.020"						
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING						