


REV	ECN	APP'D
-	6588	<i>gvt 9/28/10</i>

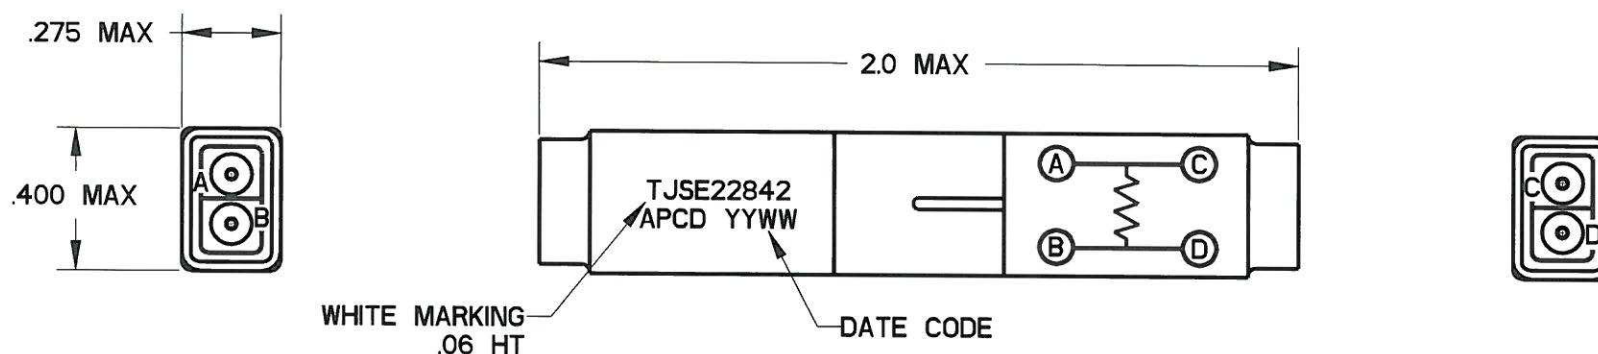

NOTES:

1. MATERIALS:

HOUSING: POLYETHERIMIDE, COLOR BLACK
GROMMET: SILICONE ELASTOMER, COLOR BLUE
INTERNAL CONTACT: COPPER ALLOY, GOLD PLATED,
PER MIL-DTL-45204, TYPE I, GRADE C, CLASS I
50 MICROINCH MIN. OVER NICKEL PER SAE-AMS-QQ-N-290,
CLASS 1, 50/30 MICROINCH MIN.
CONTACT RETAINER: STAINLESS STEEL

2. SPLICE ACCEPTS (4) MATING M39029/1-100 CONTACTS
(INCLUDED)

3. PART COMPLIES TO ALL REQUIREMENTS PER SAE-AS81714.

4. RESISTOR: 47.5Ω , 1/8W, $\pm 1\%$, RLR05C47R5FS

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ± 0.01 .XXX ± 0.005 ANGLES $\pm 2.0^\circ$	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING ENGR M. DiGIACOMO 09/07/10	TITLE WIRE SPLICE, ELECTRONIC RESISTOR, 47.5Ω , 1/8W, 1% SIZE 22		
ORIGINAL 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA		CHKD <i>R. Newman 9/28/10</i> APPD <i>gvt 9/28/10</i>	SIZE A	DWG NO. TJSE22842_C	REV -
			CODE: 58982	SCALE: 2:1	SHEET 1 OF 1	