
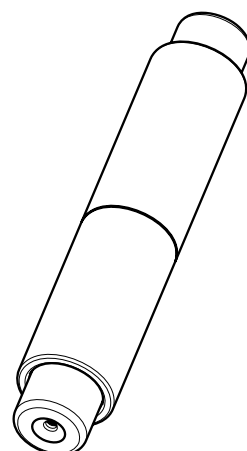
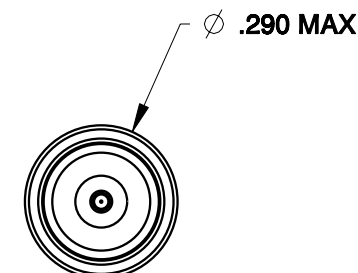


REV	ECN	APP'D
-	4679	JT 12/20/01
A	5793	

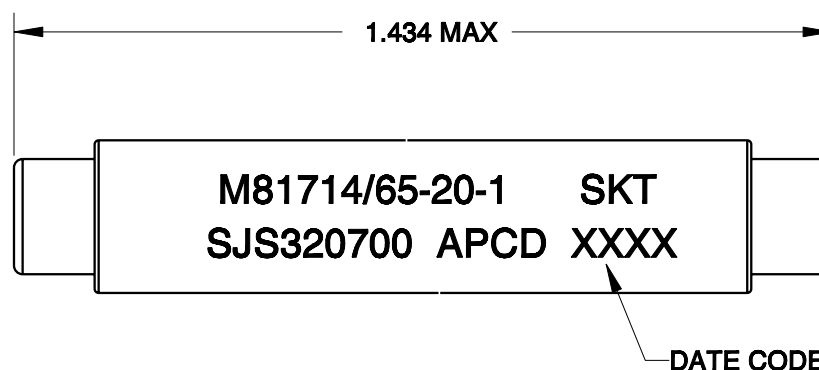

SCALE 2:1

NOTES:

1. MATERIALS:

INSULATOR BODY: POLYETHERIMIDE PER ASTM-D-5205

WIRE-SEALING GROMMET: SILICONE RUBBER PER A-A-59588

INTERNAL CONTACT: COPPER ALLOY, GOLD FINISH

2. PART ACCEPTS M39029/22-192 SOCKET CONTACTS - PER TABLE.

3. OPERATING RANGE:

TEMPERATURE: -65° C TO 200° C

INSULATION RESISTANCE: 5000 MEGOHMS MIN

DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, SEA LEVEL
200 VRMS, 100,000 FT ALTITUDE

CURRENT RATING: 7.5 AMPS

VIBRATION AND SHOCK: PER MIL-T-81714, PARA. 3.5.5 AND 3.5.8.

PART NO.	DESCRIPTION	P/N MARKING
SJS320600	CONTACTS NOT SUPPLIED	SJS320700
SJS320700	QTY 2, M39029/22-192 INCLUDED	

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING		TITLE SJS WIRE SPLICE SINGLE, SIZE 20				
			ENGR S. HORNER	12/17/01					
	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA		CHKD		SIZE	DWG NO.			REV
					A	SJS320700			A
			APPD		CODE: 58982		SCALE: 3:1	SHEET 1 OF 1	