
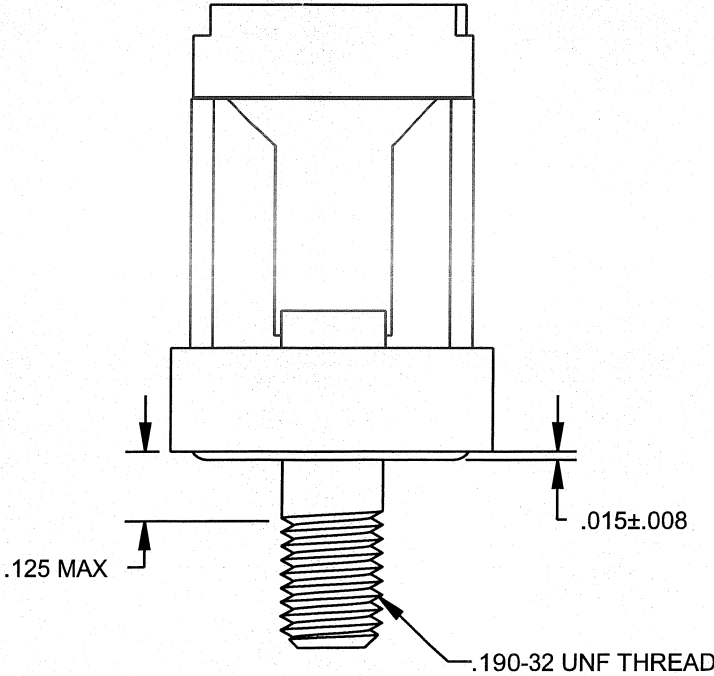
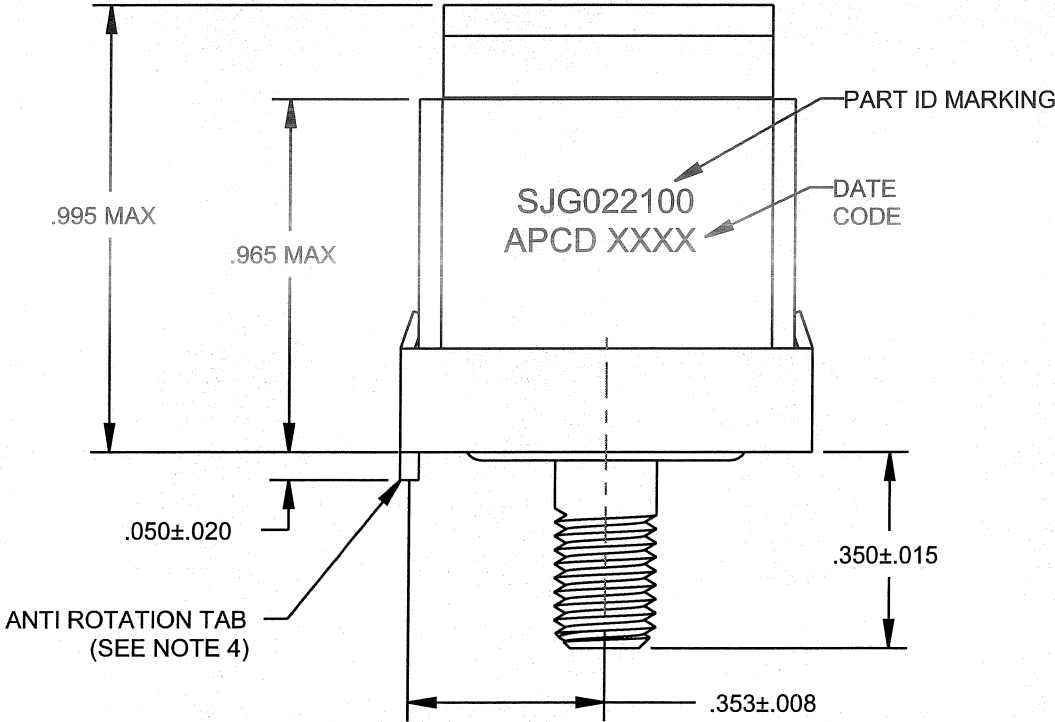
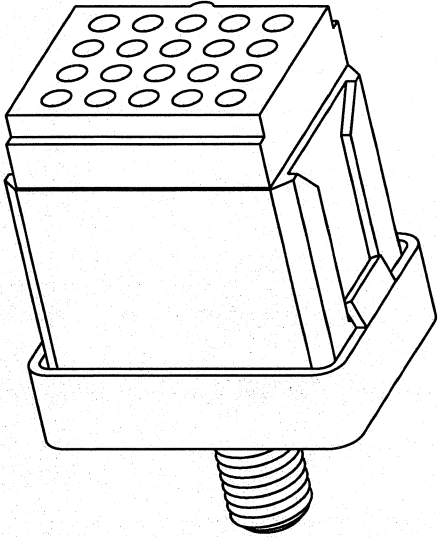
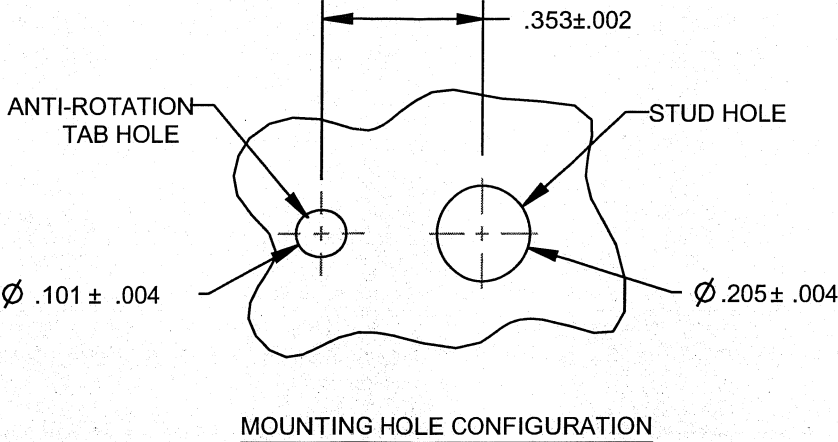


REV	ECN	APP'D
G	5910	
H	6248	7/30/08

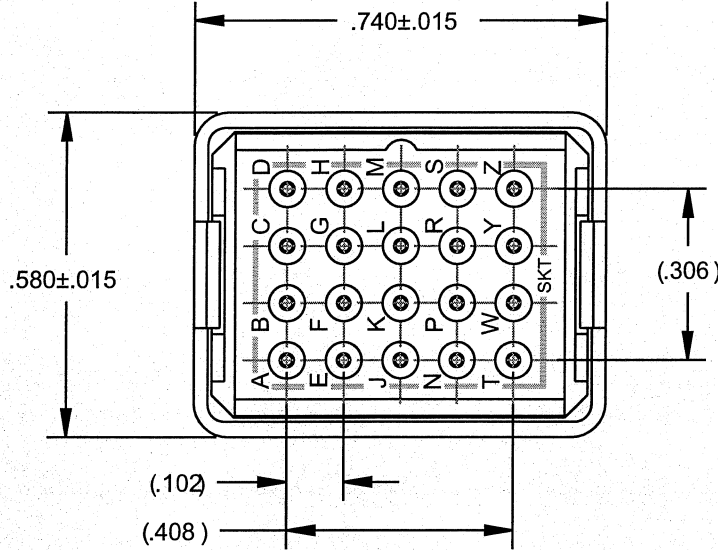

- NOTES:
1. MATERIALS:
BODY: POLYETHERIMIDE PER ASTM-D5205.
GROMMET: SILICONE BLEND ELASTOMER PER A-A-59588.
CONTACT RETAINERS: STAINLESS STEEL.
SHELL/STUD: COPPER ALLOY, TIN PER MIL-T-10727, TYPE 1
MOUNTING HARDWARE: (SUPPLIED SEPARATELY)
STEEL, CADMIUM FINISH PER SAE-AMS-QQ-P-416
 2. PERFORMANCE SPECIFICATIONS:
MEETS ALL PERFORMANCE REQUIREMENTS OF MIL-T-81714.
 3. MODULE ACCEPTS M39029/22-191 CONTACTS AND MS27488-22-1 SEALING PLUGS. SEE TABLE
 4. ANTI ROTATION TAB SHALL ENTER INTO MOUNTING HOLE.

APCD P/N	SUPPLIED		MARKING
	SKTS	PLUGS	APCD PART NO.
SJG022100	21	2	SJG022100
SJG022101	-	-	

HARDWARE / SOCKET CONTACT BOM		
APCD P/N	DESCRIPTION	QTY.
200001201	FLAT WASHER, #10	1
200008251	HEX NUT 10-32 CRS SJG	1
200008301	LOCK WASHER, INT TOOTH, #10	1
CNS070900	M39029/22-191 CONTACT SZ 20/20	13
CNA032404	SEALING PLUG, SZ 22	2

DIMENSIONS		TOLERANCES		PROJECTION		TITLE					
ANSI Y14.5M		.XX ± 0.01				SJG, SIZE 22					
UNITS: INCHES		.XXX ± 0.005				GROUNDING MODULE					
Pro/E FILE		ANGLES ± 2.0 °				TIN FINISH					
ORIGINAL		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD, BEVERLY, MA		Amphenol Pcd							
				SPECIFICATION DRAWING							
				DRWN							
				R. SWAINE 9/26/06							
				ENGR		SIZE	DWG NO.		REV		
				7/30/08		B	SJG022100		H		
				APPD		CODE: 58982		SCALE: 2:1		SHEET 1 OF 1	
				7/30/08							