

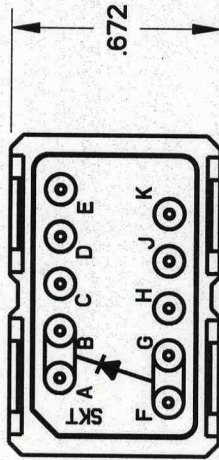


REV	ECN	APPD
1		PSM 4-13

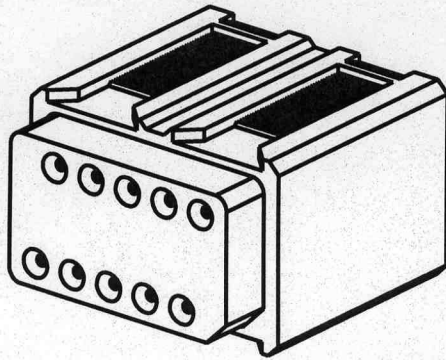


IDENTIFICATION MARKING

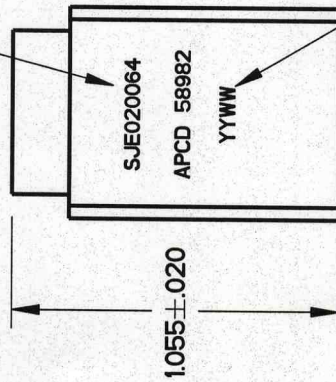

DATE CODE

SEALING GROMMET

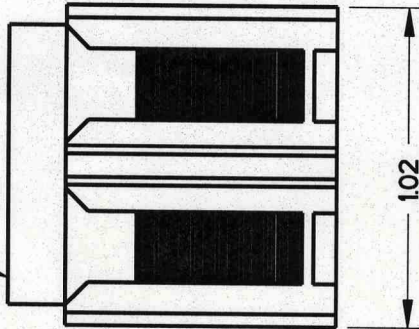

NOTES:

1. MATERIALS:
 BODY: POLYETHERIMIDE PER ASTM-D5205.
 GROMMET: SILICONE BLEND ELASTOMER.
 DIODE: JANTXIN5618, QTY: 1
 INTERNAL PIN CONTACT:
 COPPER ALLOY, HARD GOLD PLATE PER MIL-DTL-45204.
 PERFORMANCE SPECIFICATION PER SAE-AS81714.
 (SUBJECT TO LIMITATIONS OF THE ELECTRONIC COMPONENTS)
 TEMPERATURE: -65°C TO 200°C.
 INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 25°C.
 DIELECTRIC WITHSTANDING VOLTAGE:
 1500 VRMS AT SEA LEVEL,
 AND 200 VRMS AT 100,000 FT. ALTITUDE.
 CURRENT RATING: 7.5A FOR SIZE 20 CONTACTS.
 VIBRATION AND SHOCK: PER SAE-AS81714 PARA 358 & 9.
 MODULE ACCEPTS SOCKET CONTACTS (4) M39029/22-192.
2. MODULE TO BE MOUNTED ON M81714/67 RAIL SYSTEM.

TITLE

SJE SERIES
 ELECTRONIC MODULE
 JANTXIN5618

SIZE A
 DWG NO. SJE020064_C
 REV 1

Amphenol Pcd

ENGR J. ADAMS 4/10/09
 CHKD
 APPD

PROJECTION



TOLERANCES

.XX ±0.01
 .XXX ±0.005
 ANGLES ±10°

DIMENSIONS

ANSI Y14.5M
 UNITS: INCHES
 P/O/E FILE

THIS DOCUMENT CONTAINS
 PROPRIETARY INFORMATION WHICH
 IS THE CONFIDENTIAL PROPERTY
 OF AMPHENOL PCD
 BEVERLY, MA, USA

ORIGINAL



4/13/09

CODE: 58982

SCALE: NONE

SHEET 1 OF 1