


REV	ECN	APP'D
-	5297	

ELFP SERIES PART NUMBERING SCHEME

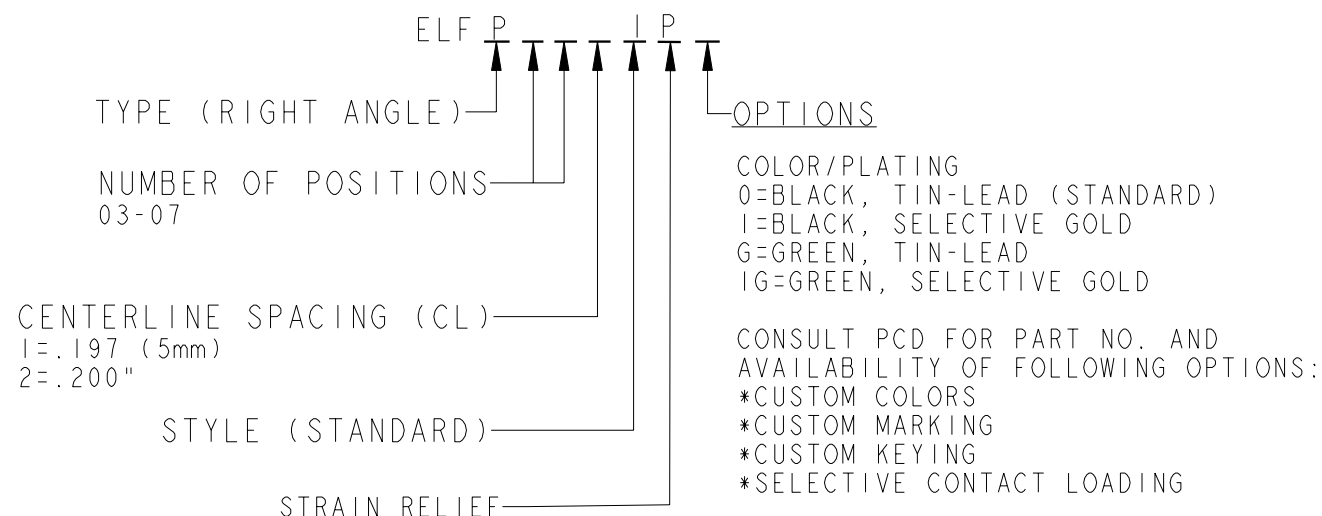

RATINGS

CURRENT - 15A
VOLTAGE - 300V
U.L. FILE NO. E83421



RATINGS

CURRENT - 15 A
VOLTAGE - 300 V
CSA FILE NO. LR69703

DIN VDE 0627:1986
DIN VDE 0110-1:1989
EN 60947-1:1991
EN 60947-7-1:1992

CURRENT -15 A
VOLTAGE - 300 V
TUV FILE NO. 20396



INSTALLATION
RECOMMENDATIONS:
WIRE RANGE: AWG #14-26, STRANDED
OR SOLID; AWG #12 STRANDED
WIRE STRIP LENGTH: .310"
TIGHTENING TORQUE: 7 LB-IN.

MATERIALS:
HOUSING: PPO, UL 94 V-0
CONTACT: COPPER ALLOY, OPTIONAL FINISH
SCREW: STEEL, NICKEL FINISH
WIRE CLAMP: COPPER ALLOY, NICKEL FINISH

MAX OPERATING TEMPERATURE:
105°C



DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	PROJECTION  	AMPHENOL PCD ENGR R. NEWMAN 09/02/03		TITLE ELFP SERIES PLUG WITH STRAIN RELIEF, RIGHT ANGLE				
ORIGINAL STAMPED IN RED	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA		CHKD		SIZE A	DWG NO. ELFP0311P0		REV -	
			APPD		CODE: 58982		SCALE: NONE	SHEET 1 OF 2	

$$L = (\text{NUM OF POS} \times \text{CL}) - .1$$

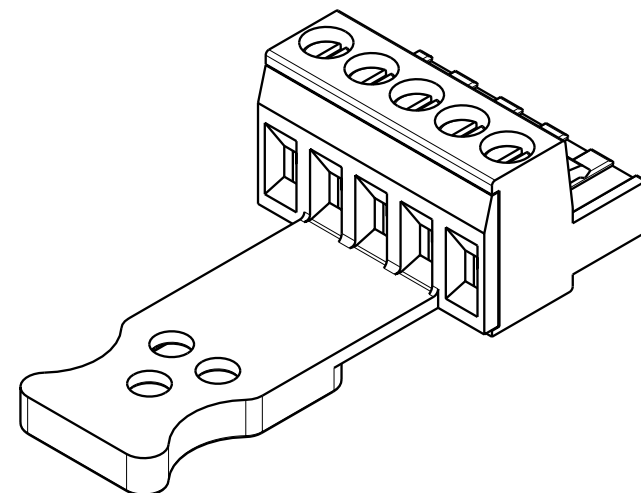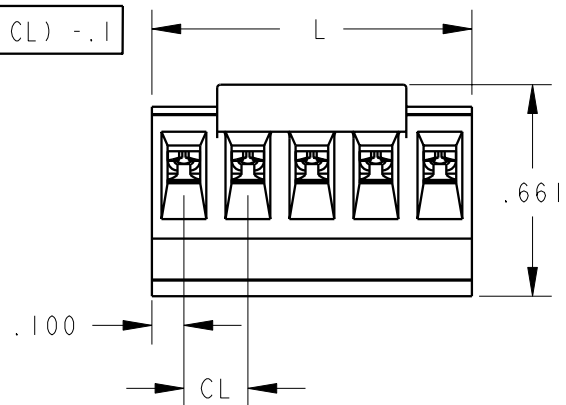

P/N ELFP0511P0 SHOWN

$$A = L - .591$$

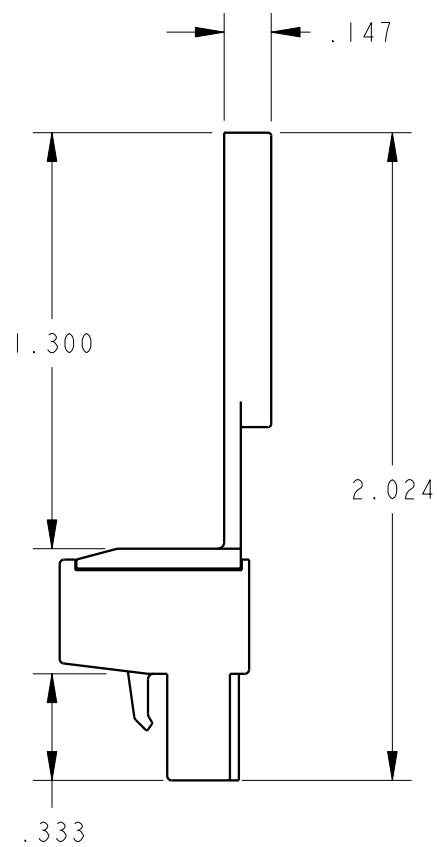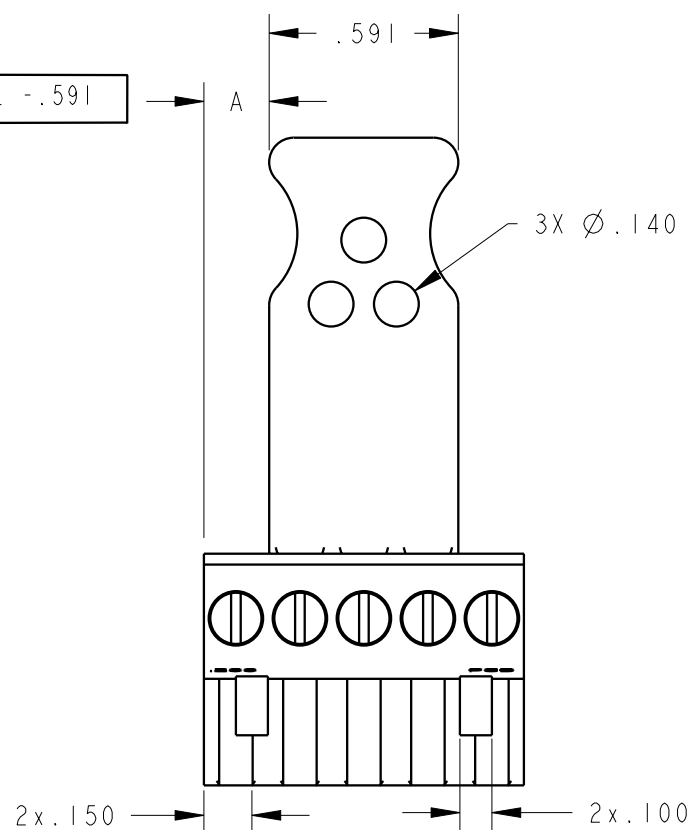

SIZE	DWG NO.	REV
A	ELFP0311P0	-
CODE: 58982	SCALE: NONE	SHEET 2 OF 2