

New Jersey Semi-Conductor Products, Inc.


20 STERN AVE.
 SPRINGFIELD, NEW JERSEY 07081
 U.S.A.

TELEPHONE: (201) 376-2922
 (212) 227-6005
 FAX: (201) 376-8960


ZENER DIODE

Zener Type No.	Zener Voltage at I_{ZT}		Max. Zener Impedance @ I_{ZT} Ohms	Zener Voltage Tolerance	Power Rating
	Volts	@ mA			
1N1352	11.0	500.0	2.0	Suffix A = 5%	"
1N1353	12.0	500.0	2.0	Suffix R = Rev. Polarity	"
1N1354	13.0	500.0	2.0	"	"
1N1355	15.0	500.0	2.0	"	"
1N1356	16.0	500.0	3.0	"	"
1N1357	18.0	150.0	3.0	"	"
1N1358	20.0	150.0	3.0	"	"
1N1359	22.0	150.0	3.0	"	"
1N1360	24.0	150.0	3.0	"	"
1N1361	27.0	150.0	3.0	"	"
1N1362	30.0	150.0	4.0	"	"
1N1363	33.0	150.0	4.0	"	"
1N1364	36.0	150.0	5.0	"	"
1N1365	39.0	150.0	5.0	"	"

DO-4

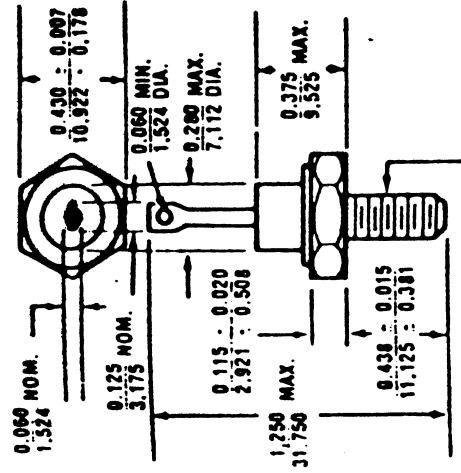

16-32 UNF-2A (MOD) PITCH DIA.
 MIN. 1.858 MAX. 1.697
 TO WITHSTAND A TORQUE UP
 TO 30 IN.-LB. WHEN NUT IS
 TIGHTENED ON STUD



Quality Semi-Conductors