



Model Number

30-***6

Features

- For extreme mechanical loads
- Up to 5000 ppr
- Stainless steel version
- 5 V with RS-422 interface

Description

The series 30 incremental rotary encoders have been specially designed for use in areas with a high level of mechanical demand. Therefore, the housing is made of steel.

The shaft is specially equipped with a feather key groove for attaching a belt pulley or similar device. The permissible radial force is 80 N, while the permissible axial force is 60 N.

The pulse disk is designed in plastic up to 1500 pulses. Beyond that, glass is used.

Technical data

General specifications

Pulse count max. 5000

Electrical specifications

Operating voltage U_B 5 V DC \pm 5 %

No-load supply current I_0 max. 150 mA

Output

Output type RS 422, incremental

Voltage drop U_d

Load current max. per channel 20 mA, conditionally short-circuit proof

Output frequency max. 100 kHz

Rise time 100 ns

De-energized delay t_{off} 100 ns

Connection

Connector type 9416 (M23), 12-pin

Cable \varnothing 6 mm, 4 x 2 x 0.14 mm², 2 m

Standard conformity

Degree of protection DIN EN 60529, IP65

Emitted interference EN 61000-6-4:2007/A1:2011

Noise immunity EN 61000-6-2:2005

Ambient conditions

Operating temperature

Glass disk -20 ... 70 °C (-4 ... 158 °F)

Plastic disk -20 ... 60 °C (-4 ... 140 °F)

Storage temperature

Glass disk -40 ... 70 °C (-40 ... 158 °F)

Plastic disk -40 ... 60 °C (-40 ... 140 °F)

Mechanical specifications

Material

Combination 1 housing: stainless steel 1.4301 / AISI 304
flange: aluminum 3.1645
shaft: stainless steel 1.4305 / AISI 303

Combination 2 (Inox) housing: stainless steel
flange: stainless steel
shaft: stainless steel

Mass

approx. 1250 g (combination 1)

approx. 2200 g (combination 2)

Rotational speed

max. 6000 min⁻¹

Moment of inertia

< 270 gcm²

Starting torque

≤ 5 Ncm

Shaft load

Axial 60 N


Radial 80 N

Approvals and certificates

UL approval

cULus Listed, General Purpose, Class 2 Power Source

Dimensions

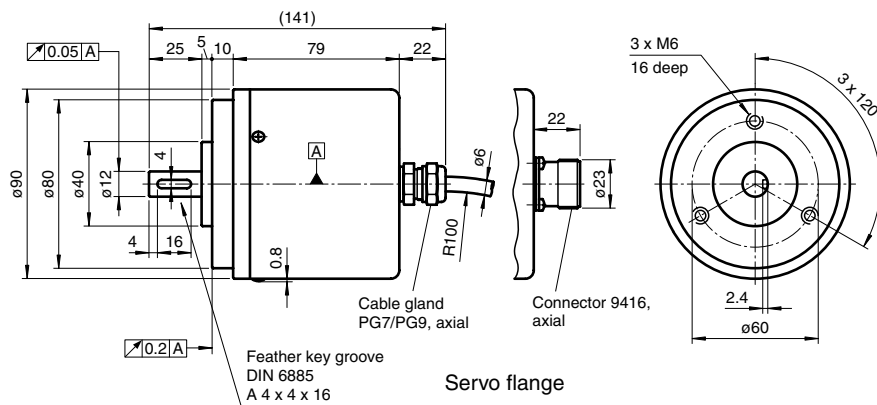


Electrical connection

Signal	Cable Ø6 mm, 8-core	Connector 9416, 12-pin
GND	White	1
+U _b	Brown	2
A	Green	3
B	Grey	4
\bar{A}	Yellow	5
\bar{B}	Pink	6
0	Blue	7
$\bar{0}$	Red	8

Release date: 2014-12-11 09:21 Date of issue: 2014-12-11 12411_eng.xml

Signal outputs

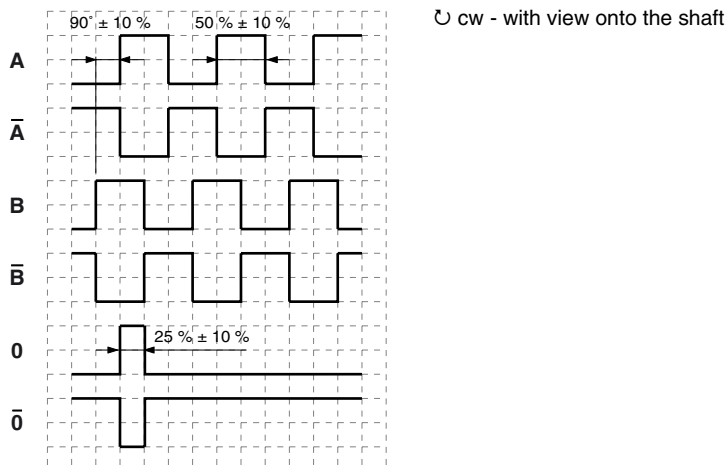

Accessories

Accessories	Name/defining feature	Order code
Couplings	D1: Ø12 mm, D2: Ø12 mm	9401
	D1: Ø12 mm, D2: Ø12 mm	9404
	D1: Ø12 mm, D2: Ø12 mm	9409
	D1: Ø12 mm, D2: Ø12 mm	KW
Mounting aid	Mounting bracket	9301
Connector	Cable socket	9416

For additional information on the accessories, please see the "Accessories" section.

Order code



Pulse count 60, 100, 120, 180, 200, 250, 256, 300, 314, 360, 400, 500, 512, 600, 720, 900, 1000, 1024, 1200, 1250, 1500, 1800, 2000, 2048, 2400, 2500, 3000, 3600, 4000, 4096, 5000

Exit position

A Axial

Material

I INOX

- Aluminium

Output switching

1 10 V ... 30 V, push-pull

6 5 V, RS 422

Connection type (connector only axial)

0 Cable Ø6 mm, 2 x 4 x 0.14 mm², 2 m

4 Plug connector type 9416, 12-pin

Signal output

36 A + B + 0 and $\bar{A} + \bar{B} + \bar{0}$

42 A + B + 0

Release date: 2014-12-11 09:21 Date of issue: 2014-12-11 12:41_eng.xml