



Model Number


V19-G-BK5M-PUR-IEC

Cable socket, M12, 8-pin, PUR-cable

Features

- Color code according to IEC 60947-5-2
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Flame resistant cable
- Appropriate for conveyor chains
- Resistant to microbes and hydrolysis
- Halogen-free

Dimensions

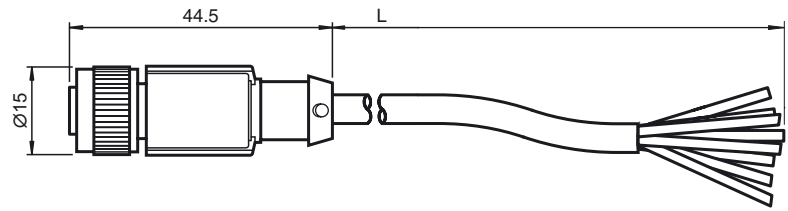

Technical data

General specifications

Number of pins	8
Connection 1	female connector
Construction type 1	straight
Threading 1	M12
Connection 2	cable end

Electrical specifications

Operating voltage	U_B	max. 30 V DC
Test voltage		> 1500 V _{eff} AC
Operating current		max. 2 A
Volume resistance		< 5 mΩ

Ambient conditions

Ambient temperature	-25 ... 90 °C (-13 ... 194 °F) Cable, flexing: -5 ... 80 °C (23 ... 176 °F), Cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
Pollution Degree	3

Mechanical specifications

Protection degree	IP65 / IP68 / IP69K	
Material		
Contacts	CuZn	
Contact surface	Ni/Au	
Body	TPU, black	
Cable	PUR	
Slotted nut	Zinc die-casting, nickel-plated	
Seal	NBR	
Core insulation	PP	
Cable	extra-fine wire, flexible	
Sheath diameter	Ø 5.9 mm	
Bending radius	> 50 mm	
Color	dark grey (RAL 7021)	
Cores	8 x 0.25 mm ² , 24 AWG	
Conductor construction	32 x 0.1 mm Ø	
Length	L	5 m

Electrical connection

