



LEDTECH ELECTRONICS CORP.

NANYA ROAD, MUGANG ZHAOQING
CITY GUANGDONG CHINA.

TEL: 86-758-2875541, 2870651, 2877464, 2876185, 2877017

FAX: 86-758-2878014

[Http://www.ledtech.com.tw](http://www.ledtech.com.tw)

SPECIFICATION

COB ϕ 25mm TYPE

PART NO. : LP30NX-SXXX Series

| | 5750-6750K | 2875-3200K |
|-----|-------------|-------------|
| 3W | LP30N3-S049 | LP30NR-S050 |
| 4W | LP30N3-S051 | LP30NR-S052 |
| 6W | LP30N3-S053 | LP30NR-S054 |
| 9W | LP30N3-S055 | LP30NR-S056 |
| 12W | LP30N3-S057 | LP30NR-S058 |
| 15W | LP30N3-S059 | LP30NR-S060 |



Approved by

Checked by

Prepared by

| | | |
|--|--|--|
| | | |
|--|--|--|



Features


- Pb-Free soldering application
- RoHS compliance
- Multi-Chip package
- High Reliability

Application

- Bay-light module
- Indoor decorative lighting
- Illumination
- Automotive Application
- Architectural Lighting
- Indicator / Decoration



Package Dimensions

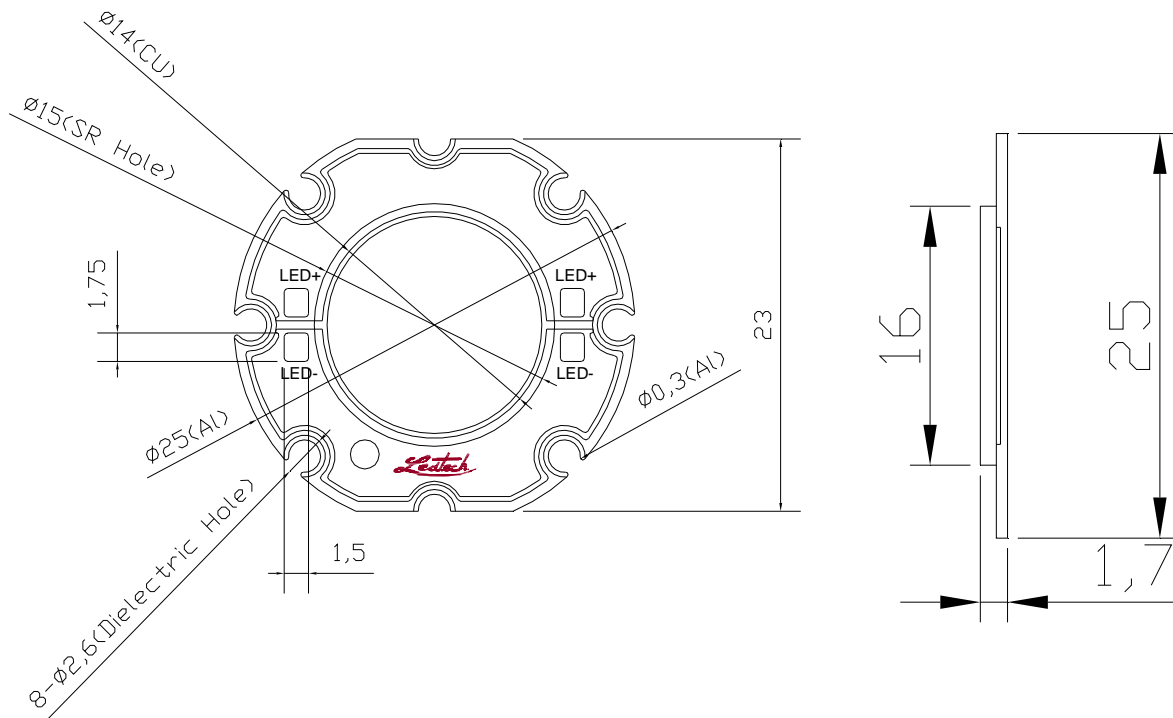







Notes:

1. All dimensions are in mm.
2. Tolerance is ± 0.3 mm unless otherwise noted

Description

| Part NO. | LED Chip | | Lens Color |
|-------------|----------------|----------------|-----------------|
| | Material | Emitting Color | |
| LP30NX-SXXX | InGaN/Sapphire | White | Yellow Diffused |
| | | Warm White | Orange Diffused |

Circuitry
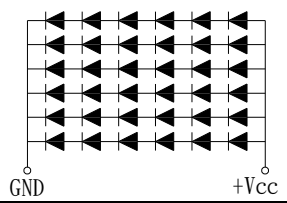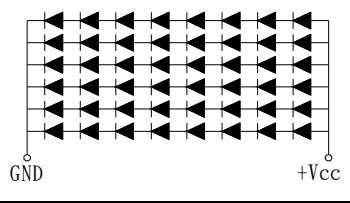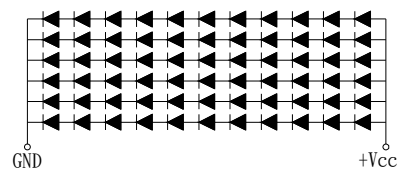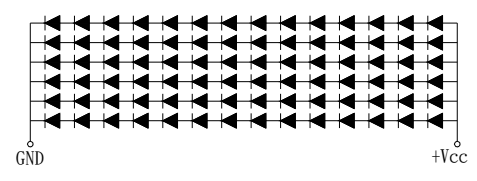
| | | | |
|------------|--|------------|---|
| 3W |  | 4W |  |
| | LP30N3-S049 LP30NR-S050 | | LP30N3-S051 LP30NR-S052 |
| 6W |  | 9W |  |
| | LP30N3-S053 LP30NR-S054 | | LP30N3-S055 LP30NR-S056 |
| 12W |  | 15W |  |
| | LP30N3-S057 LP30NR-S058 | | LP30N3-S059 LP30NR-S060 |

Absolute Maximum Ratings at Ta=25°C :

| Parameter | Symbol | Rating | Unit |
|---|-------------------|----------------------------------|------|
| LED Junction Temperature | T _j | 120 | °C |
| Reverse Voltage ★ | V _r | 5 | V |
| D.C. Forward Current | I _f | 350 | mA |
| Storage Temperature Range | T _{stg.} | -40 to +85 | °C |
| Soldering Temperature | T _{sl.} | Hand Soldering: 350°C for 5 sec. | |
| Electric Static Discharge Threshold (HBM) ★ | ESD | 1000 | V |

★ The value are based on 1 die performance.



LP30NX-SXXX
Series

COB ϕ 25mm TYPE

Electrical and Optical Characteristics :

3W LP30N3-S049

| Parameter | Symbol | Condition | Values | | | Units | |
|--------------------------------------|---------|----------------|----------|--------|------|---------|----|
| | | | Min. | Typ. | Max. | | |
| Luminous Flux | | Φ_v | IF=350mA | -- | 350 | -- | lm |
| | Rank L1 | | | 200 | -- | 400 | |
| | Rank L2 | | | 400 | -- | 600 | |
| Forward voltage | | VF | IF=350mA | -- | 9.5 | -- | V |
| | Rank V1 | | | 8 | -- | 10 | |
| | Rank V2 | | | 10 | -- | 12 | |
| Correlated Color Temperature | CCT | IF=350mA | 5750 | -- | 6750 | K | |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | -- | 0.3123 | -- | | |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | -- | 0.3282 | -- | | |
| Reverse Current | I_R | $V_r=5V$ | -- | -- | 50 | μA | |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra | |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. | |

3W LP30NR-S050

| Parameter | Symbol | Condition | Values | | | Units | |
|--------------------------------------|---------|----------------|----------|--------|------|---------|----|
| | | | Min. | Typ. | Max. | | |
| Luminous Flux | | Φ_v | IF=350mA | -- | 320 | -- | lm |
| | Rank L1 | | | 200 | -- | 400 | |
| | Rank L2 | | | 400 | -- | 600 | |
| Forward voltage | | VF | IF=350mA | -- | 9.5 | -- | V |
| | Rank V1 | | | 8 | -- | 10 | |
| | Rank V2 | | | 10 | -- | 12 | |
| Correlated Color Temperature | CCT | IF=350mA | 2875 | -- | 3200 | -- | |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | | 0.4338 | | -- | |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | | 0.4030 | | -- | |
| Reverse Current | I_R | $V_r=5V$ | -- | -- | 50 | μA | |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra | |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. | |

Notes :

1. The data tested by IS tester.
2. Customer's special requirements are also welcome



LP30NX-SXXX
Series

COB ϕ 25mm TYPE

Electrical and Optical Characteristics :

4W LP30N3-S051

| Parameter | Symbol | Condition | Values | | | Units | |
|--------------------------------------|---------|----------------|----------|--------|------|---------|----|
| | | | Min. | Typ. | Max. | | |
| Luminous Flux | | Φ_v | IF=350mA | -- | 470 | -- | lm |
| | Rank L1 | | | 350 | -- | 550 | |
| | Rank L2 | | | 550 | -- | 750 | |
| Forward voltage | | VF | IF=350mA | -- | 12.7 | -- | V |
| | Rank V1 | | | 11 | -- | 13 | |
| | Rank V2 | | | 13 | -- | 15 | |
| Correlated Color Temperature | CCT | IF=350mA | 5750 | -- | 6750 | K | |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | -- | 0.3175 | -- | | |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | -- | 0.3283 | -- | | |
| Reverse Current | I_R | $V_r=5V$ | -- | -- | 50 | μA | |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra | |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. | |

4W LP30NR-S052

| Parameter | Symbol | Condition | Values | | | Units | |
|--------------------------------------|---------|----------------|----------|--------|------|---------|----|
| | | | Min. | Typ. | Max. | | |
| Luminous Flux | | Φ_v | IF=350mA | -- | 410 | -- | lm |
| | Rank L1 | | | 350 | -- | 550 | |
| | Rank L2 | | | 550 | -- | 750 | |
| Forward voltage | | VF | IF=350mA | -- | 12.7 | -- | V |
| | Rank V1 | | | 11 | -- | 13 | |
| | Rank V2 | | | 13 | -- | 15 | |
| Correlated Color Temperature | CCT | IF=350mA | 2875 | -- | 3200 | -- | |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | | 0.4338 | | -- | |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | | 0.4030 | | -- | |
| Reverse Current | I_R | $V_r=5V$ | -- | -- | 50 | μA | |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra | |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. | |

Notes :

1. The data tested by IS tester.
2. Customer's special requirements are also welcome



LP30NX-SXXX
Series

COB ϕ 25mm TYPE

Electrical and Optical Characteristics :

6W LP30N3-S053

| Parameter | Symbol | Condition | Values | | | Units | |
|--------------------------------------|---------|----------------|----------|--------|------|---------|----|
| | | | Min. | Typ. | Max. | | |
| Luminous Flux | | Φ_v | IF=350mA | -- | 670 | -- | lm |
| | Rank L1 | | | 550 | -- | 750 | |
| | Rank L2 | | | 750 | -- | 950 | |
| Forward voltage | | VF | IF=350mA | -- | 18.9 | -- | V |
| | Rank V1 | | | 17 | -- | 19 | |
| | Rank V2 | | | 19 | -- | 21 | |
| Correlated Color Temperature | CCT | IF=350mA | 5750 | -- | 6750 | K | |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | -- | 0.3175 | -- | | |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | -- | 0.3283 | -- | | |
| Reverse Current | I_R | $V_r=5V$ | -- | -- | 50 | μA | |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra | |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. | |

6W LP30NR-S054

| Parameter | Symbol | Condition | Values | | | Units | |
|--------------------------------------|---------|----------------|----------|--------|------|---------|----|
| | | | Min. | Typ. | Max. | | |
| Luminous Flux | | Φ_v | IF=350mA | -- | 620 | -- | lm |
| | Rank L1 | | | 550 | -- | 750 | |
| | Rank L2 | | | 750 | -- | 950 | |
| Forward voltage | | VF | IF=350mA | -- | 18.9 | -- | V |
| | Rank V1 | | | 17 | -- | 19 | |
| | Rank V2 | | | 19 | -- | 21 | |
| Correlated Color Temperature | CCT | IF=350mA | 2875 | -- | 3200 | -- | |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | | 0.4338 | | -- | |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | | 0.4030 | | -- | |
| Reverse Current | I_R | $V_r=5V$ | -- | -- | 50 | μA | |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra | |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. | |

Notes :

1. The data tested by IS tester.
2. Customer's special requirements are also welcome



LP30NX-SXXX
Series

COB ϕ 25mm TYPE

Electrical and Optical Characteristics :

9W LP30N3-S055

| Parameter | Symbol | Condition | Values | | | Units |
|--------------------------------------|----------------|--------------------|--------|--------|------|---------|
| | | | Min. | Typ. | Max. | |
| Luminous Flux | | IF=350mA | -- | 940 | -- | lm |
| | Rank L1 | | 700 | -- | 900 | |
| | Rank L2 | | 900 | -- | 1100 | |
| Forward voltage | | IF=350mA | -- | 25 | -- | V |
| | Rank V1 | | 23 | -- | 26 | |
| | Rank V2 | | 26 | -- | 29 | |
| Correlated Color Temperature | CCT | IF=350mA | 5750 | -- | 6750 | K |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | -- | 0.3175 | -- | |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | -- | 0.3283 | -- | |
| Reverse Current | I _R | V _r =5V | -- | -- | 50 | μ A |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. |

9W LP30NR-S056

| Parameter | Symbol | Condition | Values | | | Units |
|--------------------------------------|----------------|--------------------|--------|--------|------|---------|
| | | | Min. | Typ. | Max. | |
| Luminous Flux | | IF=350mA | -- | 800 | -- | lm |
| | Rank L1 | | 700 | -- | 900 | |
| | Rank L2 | | 900 | -- | 1100 | |
| Forward voltage | | IF=350mA | -- | 25 | -- | V |
| | Rank V1 | | 23 | -- | 26 | |
| | Rank V2 | | 26 | -- | 29 | |
| Correlated Color Temperature | CCT | IF=350mA | 2875 | -- | 3200 | -- |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | | 0.4338 | | -- |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | | 0.4030 | | -- |
| Reverse Current | I _R | V _r =5V | -- | -- | 50 | μ A |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. |

Notes :

1. The data tested by IS tester.
2. Customer's special requirements are also welcome



LP30NX-SXXX
Series

COB ϕ 25mm TYPE

Electrical and Optical Characteristics :

12W LP30N3-S057

| Parameter | Symbol | Condition | Values | | | Units | |
|--------------------------------------|---------|----------------|----------|--------|------|---------|----|
| | | | Min. | Typ. | Max. | | |
| Luminous Flux | | Φ_v | IF=350mA | -- | 1230 | -- | lm |
| | Rank L1 | | | 1000 | -- | 1200 | |
| | Rank L2 | | | 1200 | -- | 1400 | |
| Forward voltage | | VF | IF=350mA | -- | 35 | -- | V |
| | Rank V1 | | | 30 | -- | 35 | |
| | Rank V2 | | | 35 | -- | 40 | |
| Correlated Color Temperature | CCT | IF=350mA | 5750 | -- | 6750 | K | |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | -- | 0.3175 | -- | | |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | -- | 0.3283 | -- | | |
| Reverse Current | I_R | $V_r=5V$ | -- | -- | 50 | μA | |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra | |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. | |

12W LP30NR-S058

| Parameter | Symbol | Condition | Values | | | Units | |
|--------------------------------------|---------|----------------|----------|--------|------|---------|----|
| | | | Min. | Typ. | Max. | | |
| Luminous Flux | | Φ_v | IF=350mA | -- | 1100 | -- | lm |
| | Rank L1 | | | 1000 | -- | 1200 | |
| | Rank L2 | | | 1200 | -- | 1400 | |
| Forward voltage | | VF | IF=350mA | -- | 35 | -- | V |
| | Rank V1 | | | 30 | -- | 35 | |
| | Rank V2 | | | 35 | -- | 40 | |
| Correlated Color Temperature | CCT | IF=350mA | 2875 | -- | 3200 | -- | |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | | 0.4338 | | -- | |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | | 0.4030 | | -- | |
| Reverse Current | I_R | $V_r=5V$ | -- | -- | 50 | μA | |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra | |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. | |

Notes :

1. The data tested by IS tester.
2. Customer's special requirements are also welcome



LP30NX-SXXX
Series

COB ϕ 25mm TYPE

Electrical and Optical Characteristics :

15W LP30N3-S059

| Parameter | Symbol | Condition | Values | | | Units | |
|--------------------------------------|---------|----------------|----------|--------|------|---------|----|
| | | | Min. | Typ. | Max. | | |
| Luminous Flux | | Φ_v | IF=350mA | -- | 1350 | -- | lm |
| | Rank L1 | | | 1100 | -- | 1400 | |
| | Rank L2 | | | 1400 | -- | 1700 | |
| Forward voltage | | VF | IF=350mA | -- | 44.4 | -- | V |
| | Rank V1 | | | 40 | -- | 45 | |
| | Rank V2 | | | 45 | -- | 50 | |
| Correlated Color Temperature | CCT | IF=350mA | 5750 | -- | 6750 | K | |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | -- | 0.3175 | -- | | |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | -- | 0.3283 | -- | | |
| Reverse Current | I_R | $V_r=5V$ | -- | -- | 50 | μA | |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra | |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. | |

15W LP30NR-S060


| Parameter | Symbol | Condition | Values | | | Units | |
|--------------------------------------|---------|----------------|----------|--------|------|---------|----|
| | | | Min. | Typ. | Max. | | |
| Luminous Flux | | Φ_v | IF=350mA | -- | 1250 | -- | lm |
| | Rank L1 | | | 1100 | -- | 1400 | |
| | Rank L2 | | | 1400 | -- | 1700 | |
| Forward voltage | | VF | IF=350mA | -- | 44.4 | -- | V |
| | Rank V1 | | | 40 | -- | 45 | |
| | Rank V2 | | | 45 | -- | 50 | |
| Correlated Color Temperature | CCT | IF=350mA | 2875 | -- | 3200 | -- | |
| CIE Chromaticity Coordinates: X Axis | X | IF=350mA | | 0.4338 | | -- | |
| CIE Chromaticity Coordinates: Y Axis | Y | IF=350mA | | 0.4030 | | -- | |
| Reverse Current | I_R | $V_r=5V$ | -- | -- | 50 | μA | |
| Color Rendering Index | CRI | IF=350mA | -- | 75 | -- | Ra | |
| Viewing angle at 50% IV | | 2 θ 1/2 | -- | 120 | -- | Deg. | |

Notes :


1. The data tested by IS tester.
2. Customer's special requirements are also welcome

Typical Electrical/Optical Characteristic Curves


(25°C Ambient Temperature Unless Otherwise Noted)

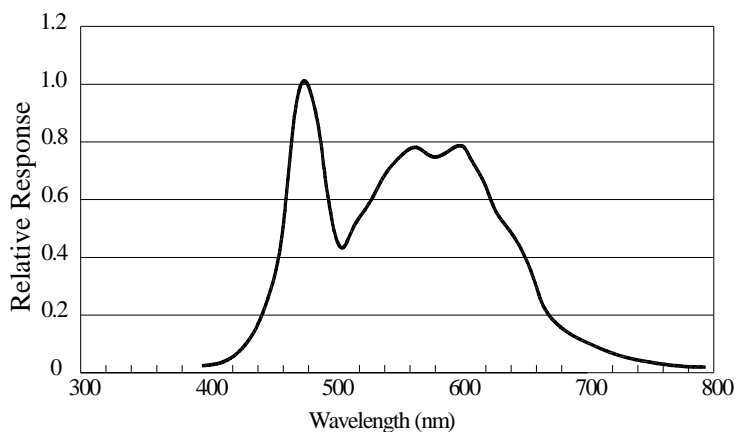


WHITE LED Spectrum VS. WAVELENGTH

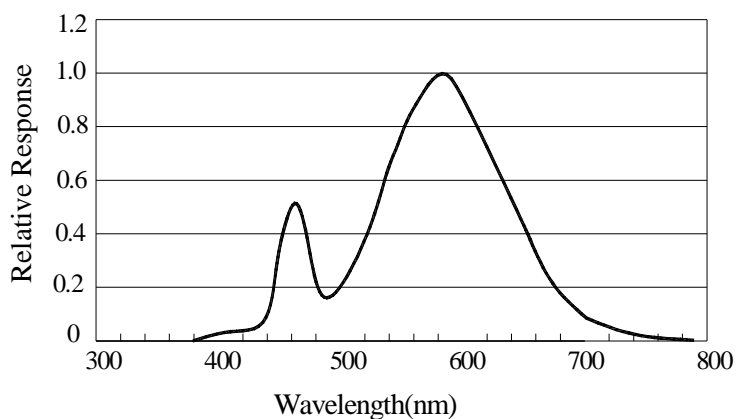

WARM WHITE LED Spectrum VS. WAVELENGTH

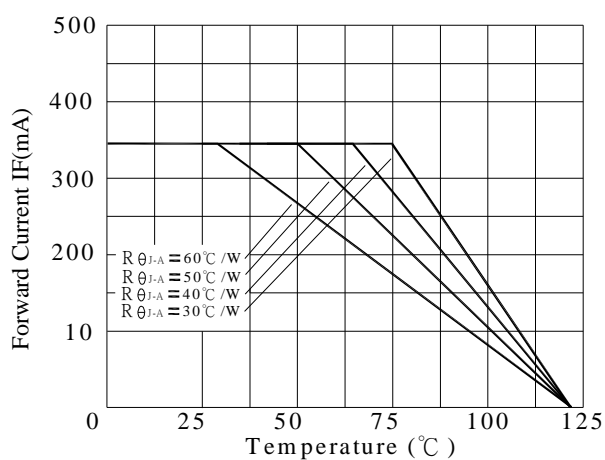

Ambient Temperature VS. Forward Current

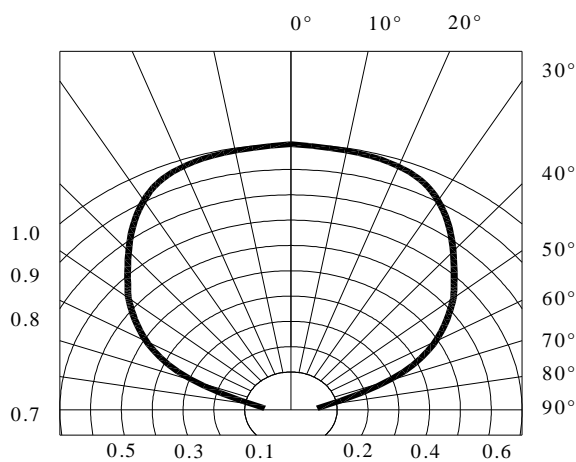

Radiation Diagram

Chromaticity Coordinates Specifications for Bin Grading:



COLOR RANKS (.Ta=25°C)

WHITE

| BIN | RANK | | | | | BIN | RANK | | | | |
|-----|------|--------|--------|--------|--------|-----|------|--------|--------|--------|--------|
| WD6 | X | 0.3210 | 0.3264 | 0.3268 | 0.3218 | WD7 | X | 0.3218 | 0.3268 | 0.3272 | 0.3227 |
| | Y | 0.3468 | 0.3551 | 0.3430 | 0.3353 | | Y | 0.3353 | 0.3430 | 0.3305 | 0.3233 |
| WE6 | X | 0.3164 | 0.3210 | 0.3218 | 0.3175 | WE7 | X | 0.3175 | 0.3218 | 0.3227 | 0.3186 |
| | Y | 0.3395 | 0.3468 | 0.3353 | 0.3283 | | Y | 0.3283 | 0.3353 | 0.3233 | 0.3169 |
| WF6 | X | 0.3122 | 0.3164 | 0.3175 | 0.3136 | WF7 | X | 0.3136 | 0.3175 | 0.3186 | 0.3151 |
| | Y | 0.3331 | 0.3395 | 0.3283 | 0.3223 | | Y | 0.3223 | 0.3283 | 0.3169 | 0.3114 |
| WG6 | X | 0.3085 | 0.3122 | 0.3136 | 0.3100 | WG7 | X | 0.3103 | 0.3136 | 0.3151 | 0.3120 |
| | Y | 0.3273 | 0.3331 | 0.3223 | 0.3170 | | Y | 0.3170 | 0.3223 | 0.3114 | 0.3064 |

Note: X.Y Tolerance each Bin limit is \pm 0.01.

Chromaticity Coordinates & Bin grading diagram:

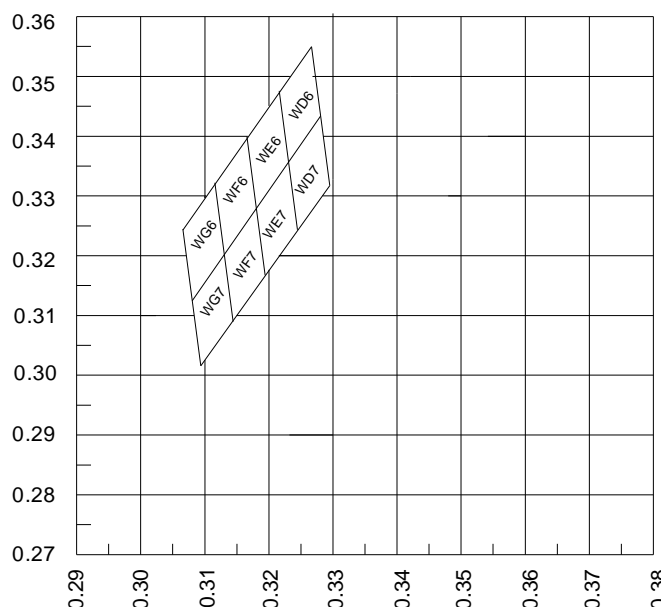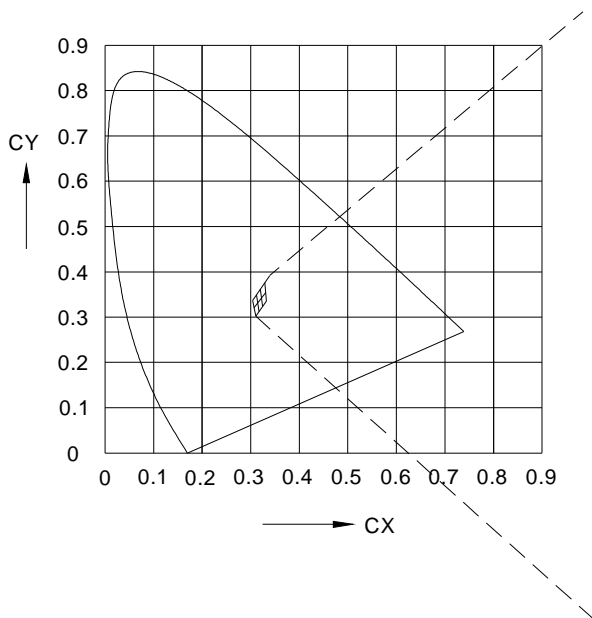

Chromaticity Coordinates Specifications for Bin Grading:


COLOR RANKS (.Ta=25°C)

WARM WHITE

| BIN | RANK | | | | |
|-----|------|--------|--------|--------|--------|
| | | | | | |
| 7A | X | 0.4147 | 0.4221 | 0.4342 | 0.4259 |
| | Y | 0.3814 | 0.3984 | 0.4028 | 0.3853 |
| 7B | X | 0.4221 | 0.4299 | 0.4430 | 0.4342 |
| | Y | 0.3984 | 0.4165 | 0.4212 | 0.4028 |
| 7C | X | 0.4342 | 0.4430 | 0.4562 | 0.4465 |
| | Y | 0.4028 | 0.4212 | 0.4260 | 0.4071 |
| 7D | X | 0.4259 | 0.4342 | 0.4465 | 0.4373 |
| | Y | 0.3853 | 0.4028 | 0.4071 | 0.3893 |

Note: X,Y Tolerance each Bin limit is ± 0.01 .

Chromaticity Coordinates & Bin grading diagram:

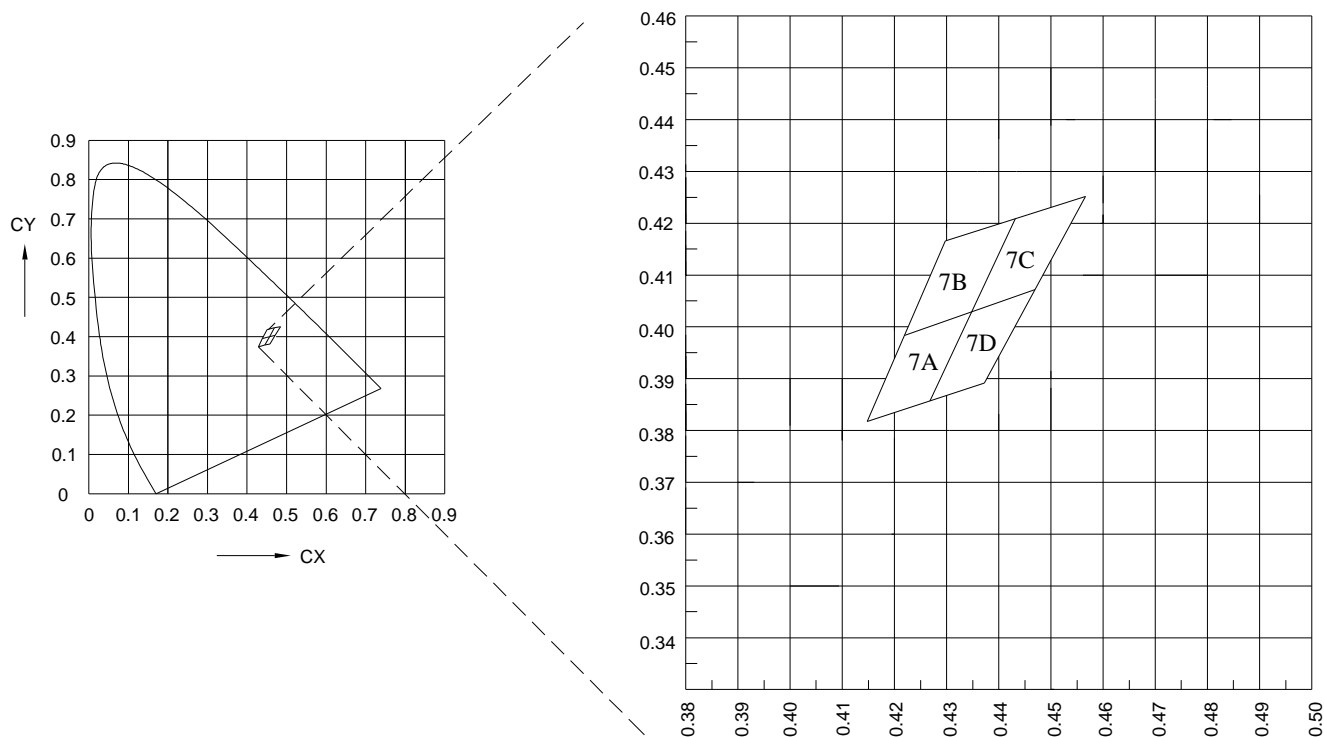

Handling Indications

During processing, mechanical stress on the surface should be minimized as much as possible. Sharp objects of all types should not be used to pierce the sealing compound

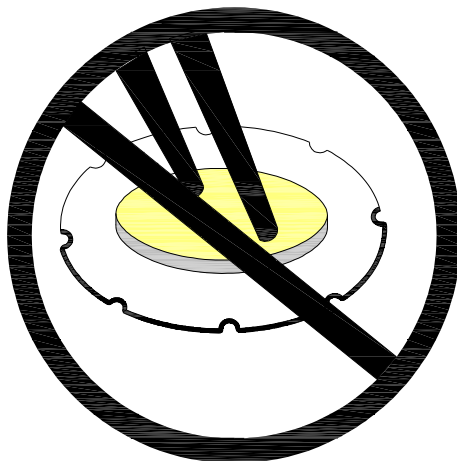


Figure 1

In general, LEDs should only be handled from the side. By the way, this also applies to LEDs without a silicone sealant, since the surface can also become scratched.

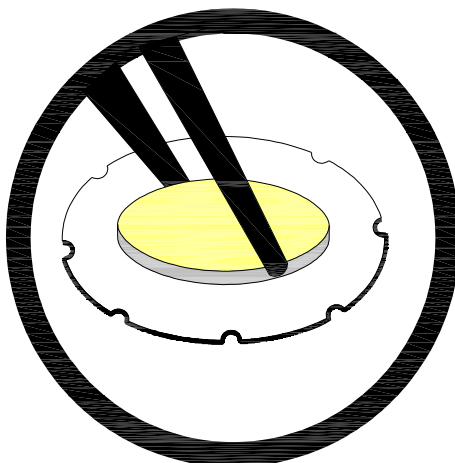


Figure 2

When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the surface of the resin must be prevented.

This is assured by choosing a pick and place nozzle which is larger than the LED's reflector area.

Tray packaging

