


6451 Pneumatic Hand Control

herga

Technology Ltd

- 2,4 & 6 way variants
- Ergonomic design for comfort
- Choice of curly or straight tubing
- Soft touch buttons
- Various colours & layout options
- Suitable for use with 6891 airswitches
- Inherently waterproof

Outline dimensions

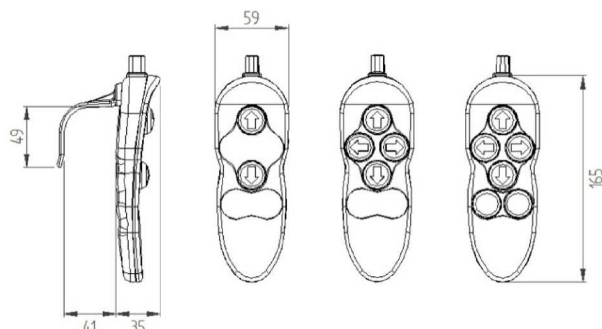

Ordering and options

6451 - ☐ ☐ ☐ ☐ - ☐ ☐ ☐ ☐

Model

Body -

- A 2 Button
- B 4 Button
- C 6 Button

Hook -

- A No hook fitted
- B Hook fitted

Buttons -

- A Grey (plain)
- B Blue (plain)
- C Grey (arrows)
- D Blue (arrows)

Tube -

- A Straight 1.5 metres
- B Curly coil 2.3 metres

Connectors -

- A No connector
- B Panel mount style
- C Round style

Accessories

- A No accessories
- B 2 x 6891-0013 Airswitch
- C 4 x 6891-0013 Airswitch
- D 6 x 6891-0013 Airswitch

General specifications

Standards/approvals	n/a
Degree of protection	n/a
Connection method	1.5mm I/D tube for use with airswitches with 2mm spouts
Electrical rating	n/a
Contact configuration	n/a
Pressure range	n/a

Operating temperature range	-5°C to +40°C with temperature compensated airswitches
Body material	Thermoplastic
Weight	0.2Kg
Additional information	Various button colours and designs available, hook optional



Herga Technology Ltd - Northern Way - Bury St. Edmunds - Suffolk - IP32 6NN - UK
sales@herga.com • www.herga.com • +44 (0)1284 701422

Subject to change without notice