


■ 7-pin SATA FDM SJ2

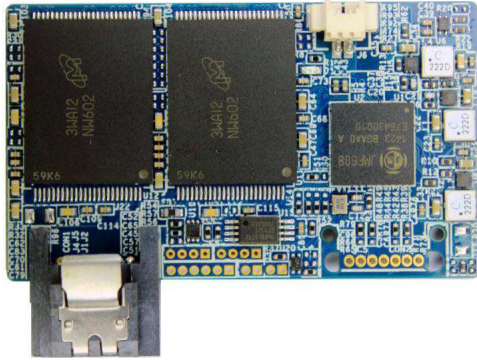

The 7-pin SATA FDM SJ2 is one of many solutions for embedded and industrial system solid state storage that Super Talent offers. Systems that require a smaller form factor SSD can take advantage of the 7-pin SATA FDM SJ2 transfer speeds for important applications that require read speeds up to 300 MB/s and write speeds up to 100 MB/s.

These devices have excellent resistance to shock, vibration, dust, temperature extremes and other environmental hazards and are widely used in aerospace, casino, and medical industries.

The 22-pin SATA FDM SJ2 is available in 8GB to 64GB capacities.

Physical Specifications

Capacity*	8GB – 64GB
Interface	SATA-III
Form Factor	SATA 22-pin
Dimensions	52.0 x 38.5 x 7.6 mm
Power Supply	5V ± 10%

Ordering Information

8GB	FF7008JPRM
16GB	FF7016JPRM
32GB	FF7032JPRM
64GB	FF7064JPRM

Environmental Specifications

Humidity	5% to 98%
Operating Shock	1500G
Operating Vibration	16G
Operating Temperature	-40°C to 85°C (I-temp), 0°C to 70°