

## Super-mini Signal Conditioners Mini-M Series

0: Specify

### THERMOCOUPLE TRANSMITTER


(photovoltaic system, instrument shelter)

#### Functions & Features

- Accepts direct input from a thermocouple and provides a standard process signal
- Burnout
- High-accuracy cold junction compensation
- Fast response type available

#### Typical Applications

- High-accuracy cold junction compensation benefits narrow span measurements
- 0.1  $\mu$ A burnout sensing enables long distance transmission with minimum offset drifts
- No burnout type can connect to a single T/C in parallel with a recorder



### [2] OUTPUT

#### Current

- A: 4 - 20 mA DC (Load resistance 750  $\Omega$  max.)
- B: 2 - 10 mA DC (Load resistance 1500  $\Omega$  max.)
- C: 1 - 5 mA DC (Load resistance 3000  $\Omega$  max.)
- D: 0 - 20 mA DC (Load resistance 750  $\Omega$  max.)
- E: 0 - 16 mA DC (Load resistance 900  $\Omega$  max.)
- F: 0 - 10 mA DC (Load resistance 1500  $\Omega$  max.)
- G: 0 - 1 mA DC (Load resistance 15 k $\Omega$  max.)

#### Voltage

- 1: 0 - 10 mV DC (Load resistance 10 k $\Omega$  min.)
- 2: 0 - 100 mV DC (Load resistance 100 k $\Omega$  min.)
- 3: 0 - 1 V DC (Load resistance 1000  $\Omega$  min.)
- 4: 0 - 10 V DC (Load resistance 10 k $\Omega$  min.)
- 5: 0 - 5 V DC (Load resistance 5000  $\Omega$  min.)
- 6: 1 - 5 V DC (Load resistance 5000  $\Omega$  min.)
- 0: Specify voltage (See OUTPUT SPECIFICATIONS)

### [3] POWER INPUT

#### AC Power

**M2:** 100 - 240 V AC (Operational voltage range 85 - 264 V, 47 - 66 Hz)

#### DC Power

- R:** 24 V DC (Operational voltage range 24 V  $\pm$ 10 %, ripple 10 %p-p max.)
- R2:** 11 - 27 V DC (Operational voltage range 11 - 27 V, ripple 10 %p-p max.) (Select '/N' for 'Standards & Approvals' code.)
- P:** 110 V DC (Operational voltage range 85 - 150 V, ripple 10 %p-p max.)

## MODEL: M2TT-[1][2]-[3][4]

### ORDERING INFORMATION

- Code number: M2TT-[1][2]-[3][4]  
Specify a code from below for each [1] through [4].  
(e.g. M2TT-2A-M2/BL/CE/Q)
- Temperature range (e.g. 0 - 800°C)
- Special output range (For codes Z & 0)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

### [1] INPUT THERMOCOUPLE

- 1: (PR) (Usable Range 0 to 1760°C, 32 to 3200°F)
- 2: K (CA) (Usable range -270 to +1370°C, -454 to +2498°F)
- 3: E (CRC) (Usable range -270 to +1000°C, -454 to +1832°F)
- 4: J (IC) (Usable range -210 to +1200°C, -346 to +2192°F)
- 5: T (CC) (Usable range -270 to +400°C, -454 to +752°F)
- 6: B (RH) (Usable range 0 to 1820°C, 32 to 3308°F)
- 7: R (Usable range -50 to +1760°C, -58 to +3200°F)
- 8: S (Usable range -50 to +1760°C, -58 to +3200°F)
- N:** N (Usable range -270 to +1300°C, -454 to +2372°F)

### [4] OPTIONS (multiple selections)

#### Response Time (0 - 90 %)

- blank:** Standard ( $\leq$  0.5 sec.)
- /K:** Fast Response (Approx. 25 msec.)

#### Burnout

- blank:** Upscale burnout
- /BL:** Downscale burnout
- /BN:** No burnout

#### Standards & Approvals (must be specified)

- /N:** Without CE
- /CE:** CE marking

#### Other Options

- blank:** none
- /Q:** Option other than the above (specify the specification)

## SPECIFICATIONS OF OPTION: Q (multiple selections)

**COATING (For the detail, refer to M-System's web site.)**

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

**TERMINAL SCREW MATERIAL**

/S01: Stainless steel

## GENERAL SPECIFICATIONS

**Construction:** Plug-in

**Connection:** M3 screw terminals (torque 0.8 N·m)

**Screw terminal:** Chromated steel (standard) or stainless steel

**Housing material:** Flame-resistant resin (black)

**Isolation:** Input to output to power

**Overrange output:** Approx. -10 to +120 % at 1 - 5 V

**Zero adjustment:** -5 to +5 % (front)

**Span adjustment:** 95 to 105 % (front)

**Linearization:** Standard

**Cold junction compensation:** CJC sensor attached to the input terminals

## INPUT SPECIFICATIONS

**Minimum span:** 3 mV

**Offset:** Max. 1.5 times span

**Input resistance:** 30 kΩ min.

**Burnout sensing:** 0.1 μA

**MIN. span (in °C)**

(PR): min. span 370°C

K (CA): min. span 75°C

E (CRC): min. span 50°C

J (IC): min. span 60°C

T (CC): min. span 75°C

B (RH): min. span 780°C

R: min. span 360°C

S: min. span 380°C

N: min. span 110°C

**MIN. span (in °F)**

(PR): min. span 670°F

K (CA): min. span 140°F

E (CRC): min. span 90°F

J (IC): min. span 110°F

T (CC): min. span 140°F

B (RH): min. span 1410°F

R: min. span 650°F

S: min. span 690°F

N: min. span 200°F

**Remark:** The described accuracy may be partially not

satisfied when the temperature ranges below 0°C. Consult factory.

## OUTPUT SPECIFICATIONS

■ **DC Voltage:** -10 - +12 V DC

**Minimum span:** 5 mV

**Offset:** Max. 1.5 times span

**Load resistance:** Output drive 1 mA max.; at ≥ 0.5 V

## INSTALLATION

**Power Consumption**

• **AC:**

Approx. 3 VA at 100 V

Approx. 4 VA at 200 V

Approx. 5 VA at 264 V

• **DC:** Approx. 3 W

**Performance-guaranteed temperature:** -15 to + 65°C (5 to 149 °F)

**Operating temperature:** -20 to +80 °C (-4 to +176°F);

must be higher than -10°C (14°F) at power on

**Operating humidity:** 10 to 90 %RH (non-condensing)

**Mounting:** Surface or DIN rail

**Weight:** 150 g (0.33 lb)

## PERFORMANCE in percentage of span

**Accuracy:** ±0.4 % (at over 400°C or 750°F for R, S and PR; over 770°C or 1420°F for B)

**Cold junction compensation error**

(at 25°C ±10°C or 77°F ±18°F)

**K, E, J, T & N:** ±0.5°C or ±0.9°F

**S, R & PR:** ±1°C or ±1.8°F

**Temp. coefficient:** ±0.015 %/°C (±0.008 %/°F)

(at over 400°C or 750°F for R, S and PR; over 770°C or 1420°F for B)

(±0.03 %/°C (±0.017 %/°F) for outside of the performance-guaranteed temperature range)

**Burnout response:** ≤ 10 sec.

**Line voltage effect:** ±0.1 % over voltage range

**Insulation resistance:** ≥ 100 MΩ with 500 V DC

**Dielectric strength:** 2000 V AC @1 minute (input to output to power to ground)

## STANDARDS & APPROVALS

**CE conformity:**

EMC Directive (2004/108/EC)

EMI EN 61000-6-4: 2007

EMS EN 61000-6-2: 2005

Low Voltage Directive (2006/95/EC)

EN 61010-1: 2001

Installation Category II


Pollution Degree 2

(Operational Temperature must be with -5 to +55°C (23 to 131°F))

Input or output to power: Reinforced insulation (300 V)

Input to output: Basic insulation (300 V)


## DIMENSIONS unit: mm (inch)

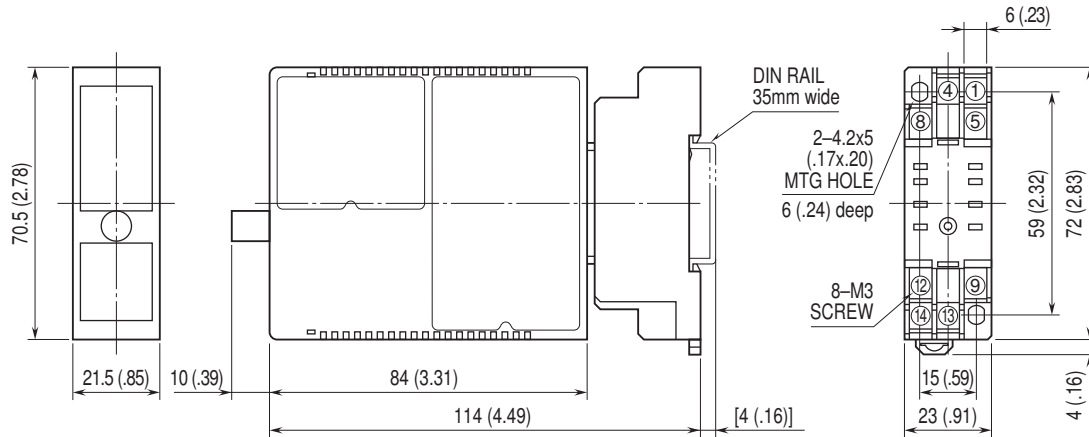


• When mounting, no extra space is needed between units.

## TERMINAL ASSIGNMENTS unit: mm (inch)

CJC SENSOR  
(model: CJM)

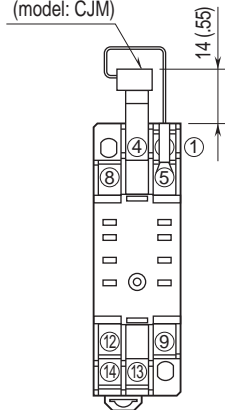

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

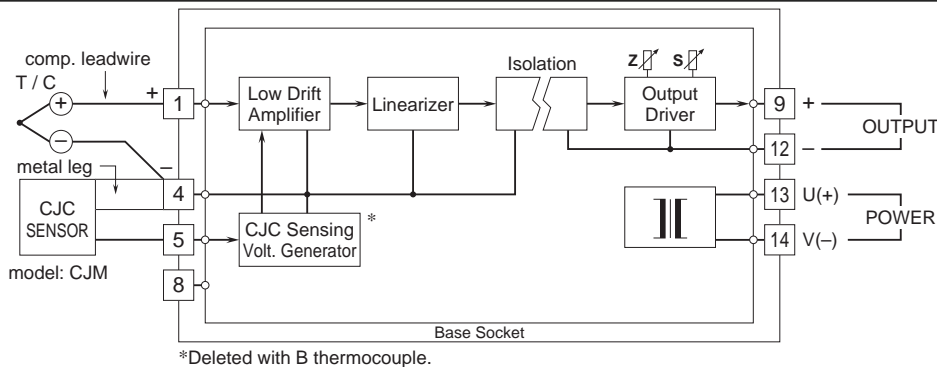



Specifications are subject to change without notice.