

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PBT
 MAX TEMPERATURE: 220°C 10 S
 COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: GOLD
 QUALITY CLASS: 3 AS PER IEC 60 603-13
 PITCH: 2.54MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 125°C
 FLAMABILITY RATING: UL94-V0
 COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
 CURRENT RATING: 3A
 WORKING VOLTAGE: 250V AC
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN
 CONTACT RESISTANCE: 20 mOHM MAX

SOLDERING
 SOLDER TEMP.: JEDEC LEAD FREE WAVE SOLDERING


PACKAGING
 BAG

DIMENSION

ORDER CODE	PINS	A	B	C	D	E
6130xx21221	64	78.74	81.28	15.24	3.00	3.00
6130xx28421	64	78.74	81.28	15.24	3.00	6.00
6130xx21321	64	78.74	81.28	30.48	3.00	3.00
6130xx28521	64	78.74	81.28	30.48	3.00	6.00

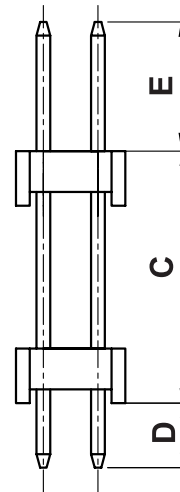

RoHS Compliant			
G			
F			
E			
D			
C	11-DEC-06	DRAW	EC
B	30-MAR-04	LEAD FREE	JP
A	08-AUG-02	PDF	JP
REV	DATE	FILE	BY



APPROVAL: RJ

GENERAL TOLERANCE
 .X = +/- 0.2
 .XX = +/- 0.15



UNIT: MM

SCALE:

SHEET: 1/1

DRAW: PEARL

DESCRIPTION: 2.54MM DUAL BOARD STACKER

WERI PART NO: 6130 xx 2xx21

SIZE

A4