


1

2

3

4

5

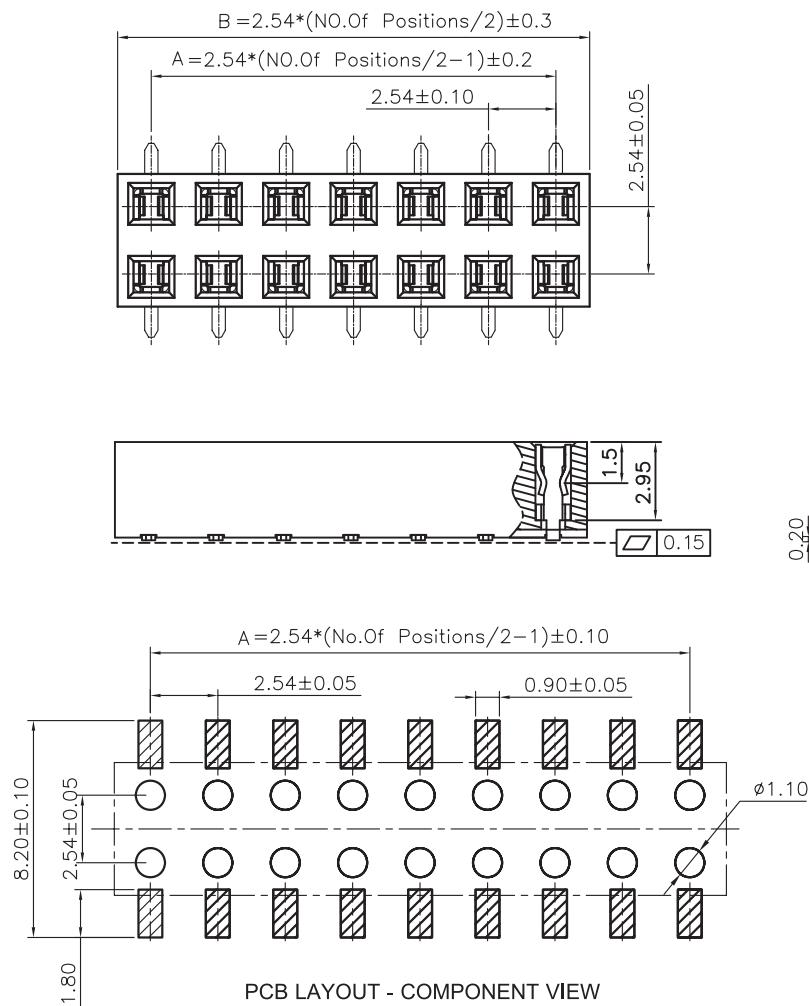

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA 6T
FLAMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
QUALITY CLASS: 3 AS PER CECC 75 301-802
PITCH: 2.54MM

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 125°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING: 3A
WORKING VOLTAGE: 250V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN
CONTACT RESISTANCE: 20 MOHM MAX

STANDARD

 CERTIFIED: E323964 / MODEL NUMBER 610-SMT

SOLDERING

JEDEC LEAD FREE REFLOW SOLDERING

PACKAGING


TUBE

DIMENSION

A = 2.54 x (NB. PIN - 1)
B = 2.54 x (NB. POSITIONS)

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2 .XX = ± 0.15 

APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/2





DRAW: MIKE WU

DESCRIPTION: 2.54MM SMT DUAL SOCKET BOTTOM ENTRY


WERI PART NO: 610 0xx 243 021

SIZE

A4

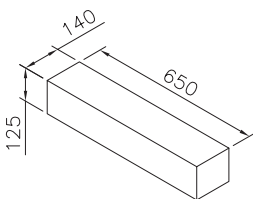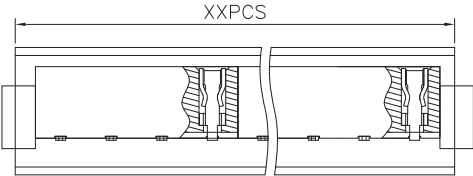

INNER CARTON

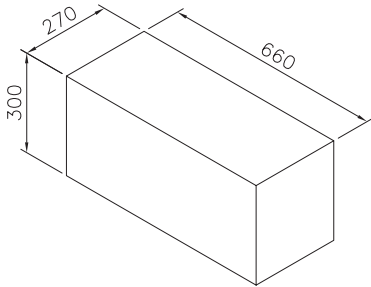

CARTON

Note:
1,Dimension
Tube Size: L=635mm
Inner Carton Size:680(L)X330(W)X160(H) (mm)
Carton Size:655(L)X152(W)X140(H) (mm)

Pin	Pcs/Tube	Tube/Inner Carton	Pcs/Inner Carton	Pcs/Carton
4	121	160	19360	77440
6	80	160	12800	51200
8	60	160	9600	38400
10	48	160	7680	30720
12	40	160	6400	25600
14	34	160	5440	21760
16	30	160	4800	19200
18	26	160	4160	16640
20	24	160	3840	15360
22	22	160	3520	14080
24	20	160	3200	12800
26	18	160	2880	11520
28	17	160	2720	10880
30	16	160	2560	10240
32	15	160	2400	9600
34	14	160	2240	8960
36	13	160	2080	8320
38	12	160	1920	7680
40	12	160	1920	7680

A

B

C

D