
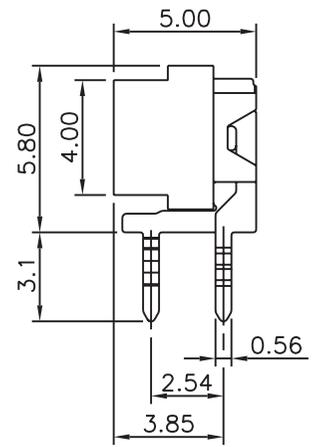


PCB LAYOUT - COMPONENT VIEW

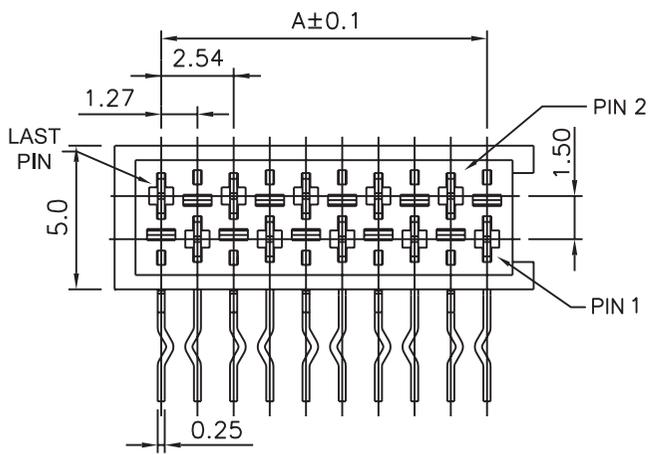

MATERIAL:
 HOUSING MATERIAL: PBT
 FLAMABILITY RATING: UL94-V0
 COLOR: RED
 CONTACT MATERIAL: PHOSPHOR BRONZE
 CONTACT TYPE: STAMPED
 CONTACT PLATING: MATT TIN OVER NICKEL
 QUALITY CLASS: 25 MATING CYCLES
 PITCH: 2.54 MM PER ROW

ENVIRONMENTAL:
 OPERATING TEMPERATURE: -40°C UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL:
 CURRENT RATING: 1.5A PER PIN (PCB PIN)
 WORKING VOLTAGE: 100VAC
 INSULATION RESISTANCE: >1000MOHM
 DIELECTRIC WITHSTANDING VOLT.: 500VAC/MN
 CONTACT RESISTANCE: 10mOHM MAX

STANDARD
 RoHS CERTIFIED: E323964 / MOD. NUMBER 69036817xx7x

SOLDERING:
 WAVE PROCESS ONLY

DIMENSION:
 DIM.A= 1.27 x No. of Spaces
 DIM.B= DIM.A + 3.27
 DIM.C= DIM.A + 1.80

AVAILABLE
 xx : 4 TO 26 CIRCUITS

PACKAGING:
 TUBE

| | | | |
|----------------|-----------|---------------|----|
| RoHS Compliant | | | |
| G | | | |
| F | 17-JUL-13 | PACKAGING | QL |
| E | 21-NOV-11 | DIM B | GG |
| D | 15-APR-10 | PINNING | JP |
| C | 09-MAR-10 | STANDARD | JP |
| B | 27-NOV-07 | MODIFICATIONS | EC |
| A | 03-NOV-06 | PDF | JP |
| REV | DATE | FILE | BY |

| | |
|--------------|--|
| PROJECTION: | |
| | |
| APPROVAL: RJ | |

| | |
|-------------------|--|
| GENERAL TOLERANCE | |
| .X = +/- 0.2 | |
| .XX = +/- 0.15 | |
| UNIT: MM | |
| SCALE: | |
| SHEET: 1/1 | |
| DRAW: EAGER | |

| | |
|---|--|
| | |
| DESCRIPTION: MM FEMALE ANGLED CONNECTOR WITH POLARIZATION WITHOUT LATCH | |
| WERI PART NO: 690 368 17 xx 72 | |

| | |
|------|----|
| SIZE | A4 |
| | |