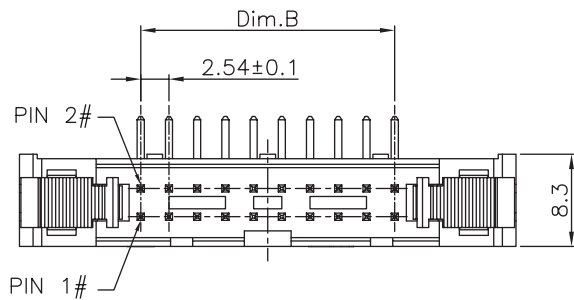

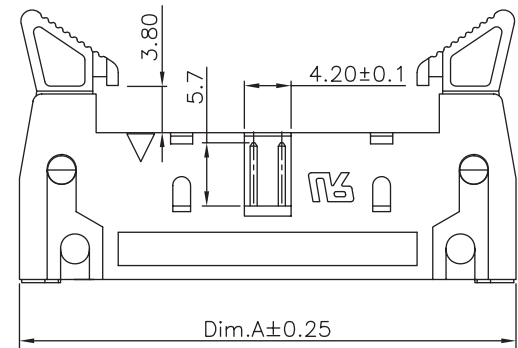
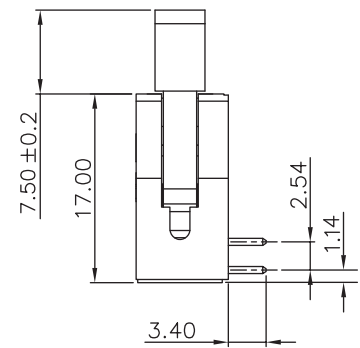
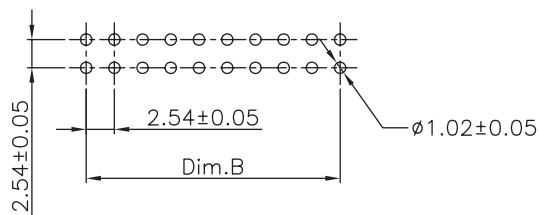




1				2				3				4				5																																																					
								<p>TECHNICAL CHARACTERISTICS</p> <p>MATERIAL</p> <p>INSULATOR: PBT</p> <p>FLAMABILITY RATING: UL94-V0</p> <p>COLOR: BLACK</p> <p>CONTACT MATERIAL: COPPER ALLOY</p> <p>CONTACT TYPE: STAMPED</p> <p>CONTACT PLATING: GOLD</p> <p>QUALITY CLASS: 3 AS PER CECC 75 301-802</p> <p>PITCH: 2.54MM</p> <p>ENVIRONMENTAL</p> <p>OPERATING TEMPERATURE: -40 UP TO 125°C</p> <p>COMPLIANCE: LEAD FREE AND ROHS</p> <p>ELECTRICAL</p> <p>CURRENT RATING: 3A MAX</p> <p>WORKING VOLTAGE: 250V AC</p> <p>INSULATOR RESISTANCE: >1000 MOHM</p> <p>DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN</p> <p>CONTACT RESISTANCE: 20 mOHM MAX</p> <p>STANDARD</p> <p> CERTIFIED: E323964 / MODEL NUMBER 612-212-R</p> <p>SOLDERING</p> <p>WAVE PROCESS ONLY</p> <p>PACKAGING</p> <p>TRAY</p> <p>DIMENSION</p> <table><tr><th>No. of Positions</th><th>Dim A</th><th>Dim B</th><th>No. of Positions</th><th>Dim A</th><th>Dim B</th></tr><tr><td>10</td><td>32.00</td><td>10.16</td><td>40</td><td>70.10</td><td>48.26</td></tr><tr><td>14</td><td>37.08</td><td>15.24</td><td>50</td><td>82.85</td><td>60.96</td></tr><tr><td>16</td><td>39.62</td><td>17.78</td><td>60</td><td>95.50</td><td>73.66</td></tr><tr><td>20</td><td>44.70</td><td>22.86</td><td></td><td></td><td></td></tr><tr><td>24</td><td>49.78</td><td>27.94</td><td></td><td></td><td></td></tr><tr><td>26</td><td>52.30</td><td>30.48</td><td></td><td></td><td></td></tr><tr><td>30</td><td>57.40</td><td>35.56</td><td></td><td></td><td></td></tr><tr><td>34</td><td>62.50</td><td>40.64</td><td></td><td></td><td></td></tr></table>								No. of Positions	Dim A	Dim B	No. of Positions	Dim A	Dim B	10	32.00	10.16	40	70.10	48.26	14	37.08	15.24	50	82.85	60.96	16	39.62	17.78	60	95.50	73.66	20	44.70	22.86				24	49.78	27.94				26	52.30	30.48				30	57.40	35.56				34	62.50	40.64			
No. of Positions	Dim A	Dim B	No. of Positions	Dim A	Dim B																																																																
10	32.00	10.16	40	70.10	48.26																																																																
14	37.08	15.24	50	82.85	60.96																																																																
16	39.62	17.78	60	95.50	73.66																																																																
20	44.70	22.86																																																																			
24	49.78	27.94																																																																			
26	52.30	30.48																																																																			
30	57.40	35.56																																																																			
34	62.50	40.64																																																																			
																																																																					
																																																																					
Recommended P.C.B Layout																																																																					
Notes:																																																																					
No. of Positions 64 with three key; Other positions with one key																																																																					
RoHS Compliant								PROJECTION:				GENERAL TOLERANCE																																																									
												.X = ± 0.2 .XX = ± 0.15																																																									
J	24-SEP-13	TABLE PINNING	QL	APPROVAL: RJ				UNIT: MM				DESCRIPTION: 2.54MM MALE ANGLED BOX HEADER WITH SHORT LEVER				SIZE																																																					
I	19-MAR-13	NOTES	AR					SCALE:																																																													
H	20-FEB-13	OVERALL LENGHT	QL					SHEET: 1/2																																																													
REV	DATE	FILE	BY					DRAW: MIKE																																																													
								WERI PART NO: 612 0xx 221 21				A4																																																									

