



1

2



3

4

5

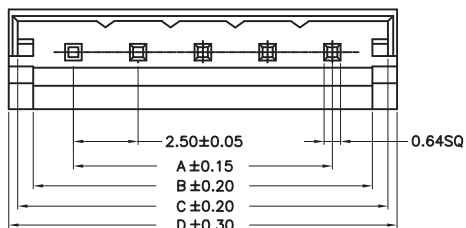

PCB LAYOUT - COMPONENT VIEW

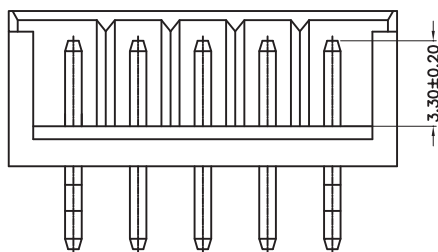

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: NYLON 66
FLAMABILITY RATING: UL94-V0
COLOR: WHITE
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: TIN
QUALITY CLASS: 25 MATING CYCLES
PITCH: 2.50MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 UP TO 85°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 3A
WORKING VOLTAGE: 250V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 800V AC/MN
CONTACT RESISTANCE: 20 mOHM MAX


SOLDERING
SOLDER TEMP.: JEDEC LEAD FREE WAVE SOLDERING

PACKAGING
BAG

DIMENSION
A = 2.50 x (NB PIN - 1)
B = 2.50 x (NB PIN) + 0.60
C = 2.50 x (NB PIN) + 1.80
D = 2.50 x (NB PIN) + 2.50

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2 .XX = ± 0.15 

APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW: MIKE

DESCRIPTION: 2.50 MM "J" TYPE MALE VERTICAL SHROUDED HEADER

WERI PART NO: 6880xx11622

SIZE

A4